


# Per-patient Dice, 2D baseline (1 slice) and 2.5D (3 slices: $\pm 1$ )

40 patients, one row each, grouped by fold (4-fold cross-validation). ENet, 40-patient SEGTHOR train set (corrected labels), median spacing + HU window + z-score + ROI crop, CE + soft Dice loss. 2.5D = slice  $\pm 1$  neighbour as 3 input channels, centre slice predicted

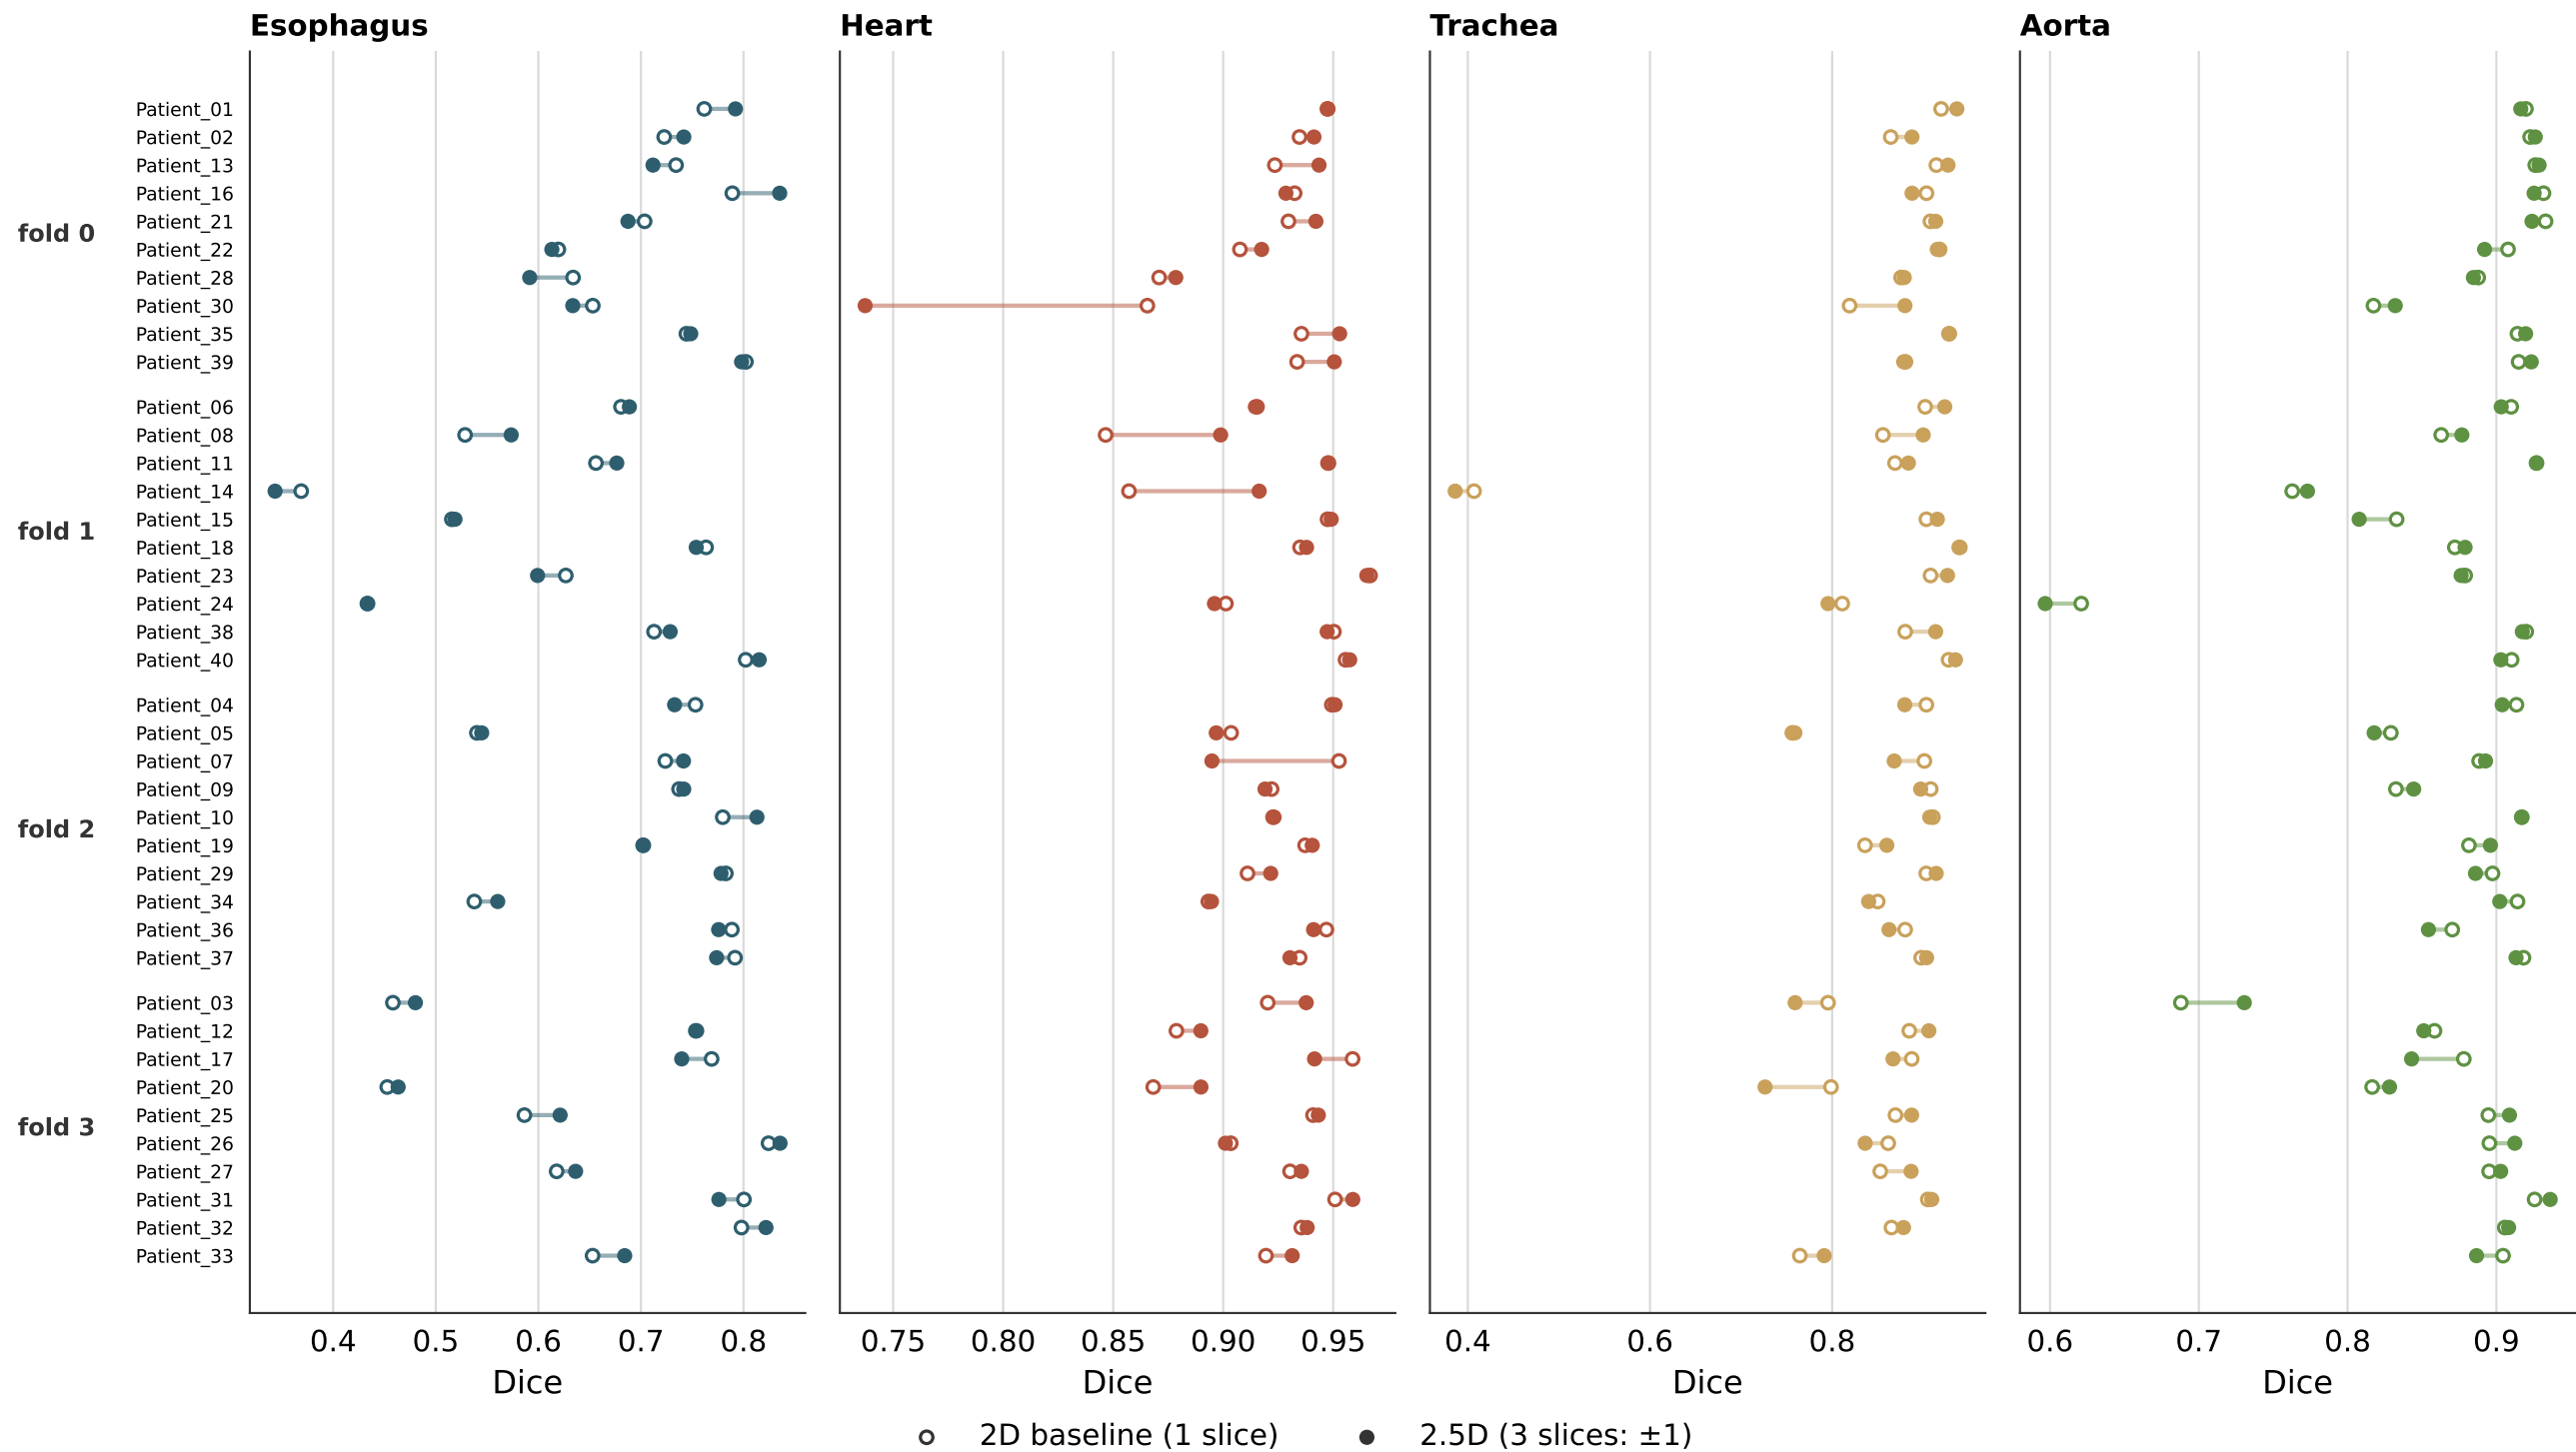

Each patient's 3D Dice (best checkpoint) averaged over 3 seeds.