

Dice per seed and fold, residual-encoder U-Net: 2D vs 2.5D

4-fold cross-validation × 3 seeds, 40 patients. Residual-encoder U-Net with deep supervision, 40-patient SEGTHOR train set (corrected labels), median spacing + HU window + z-score + ROI crop, CE + soft Dice loss. 2.5D = the slice and its ±1 neighbours as 3 input channels, centre slice predicted


Esophagus



Heart




Trachea

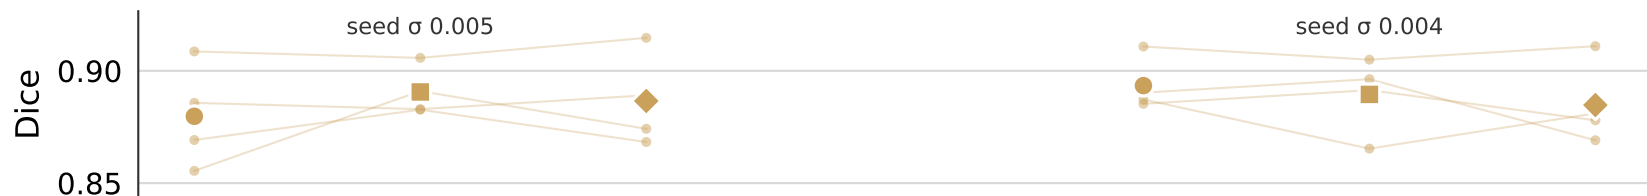

Aorta



All organs (mean)

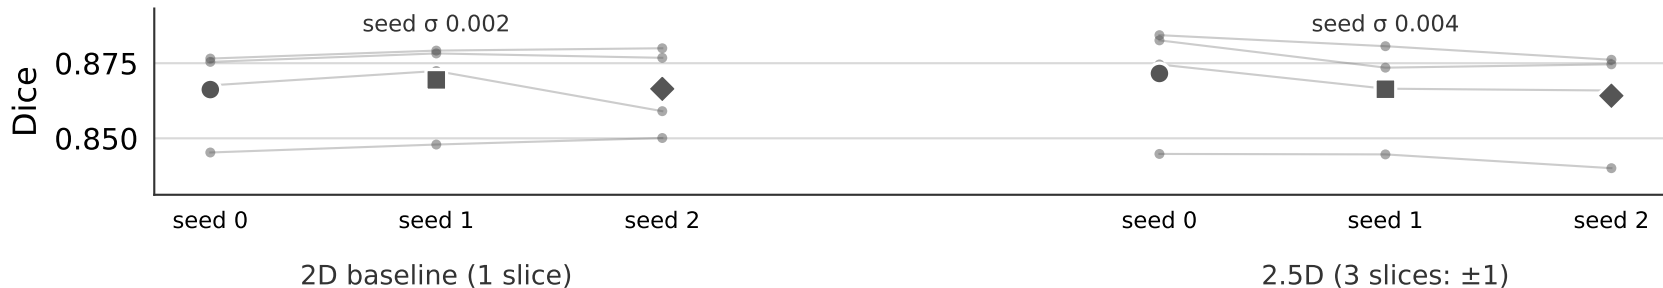

- fold (4 folds, joined across the seeds)
- mean over the folds, one marker shape per seed

Dice, 3D on the original CT grid, best checkpoint; each point is the mean over the patients of one validation fold. seed σ : std over the 3 seeds of the fold-averaged Dice. Y-axes differ per organ.