


Per-patient Dice, 2D baseline (1 slice) and 2.5D (5 slices: ± 2)

40 patients, one row each, grouped by fold (4-fold cross-validation). ENet, 40-patient SEGTHOR train set (corrected labels), median spacing + HU window + z-score + ROI crop, CE + soft Dice loss. 2.5D = the slice and its $\pm k$ neighbours as $2k+1$ input channels, centre slice predicted

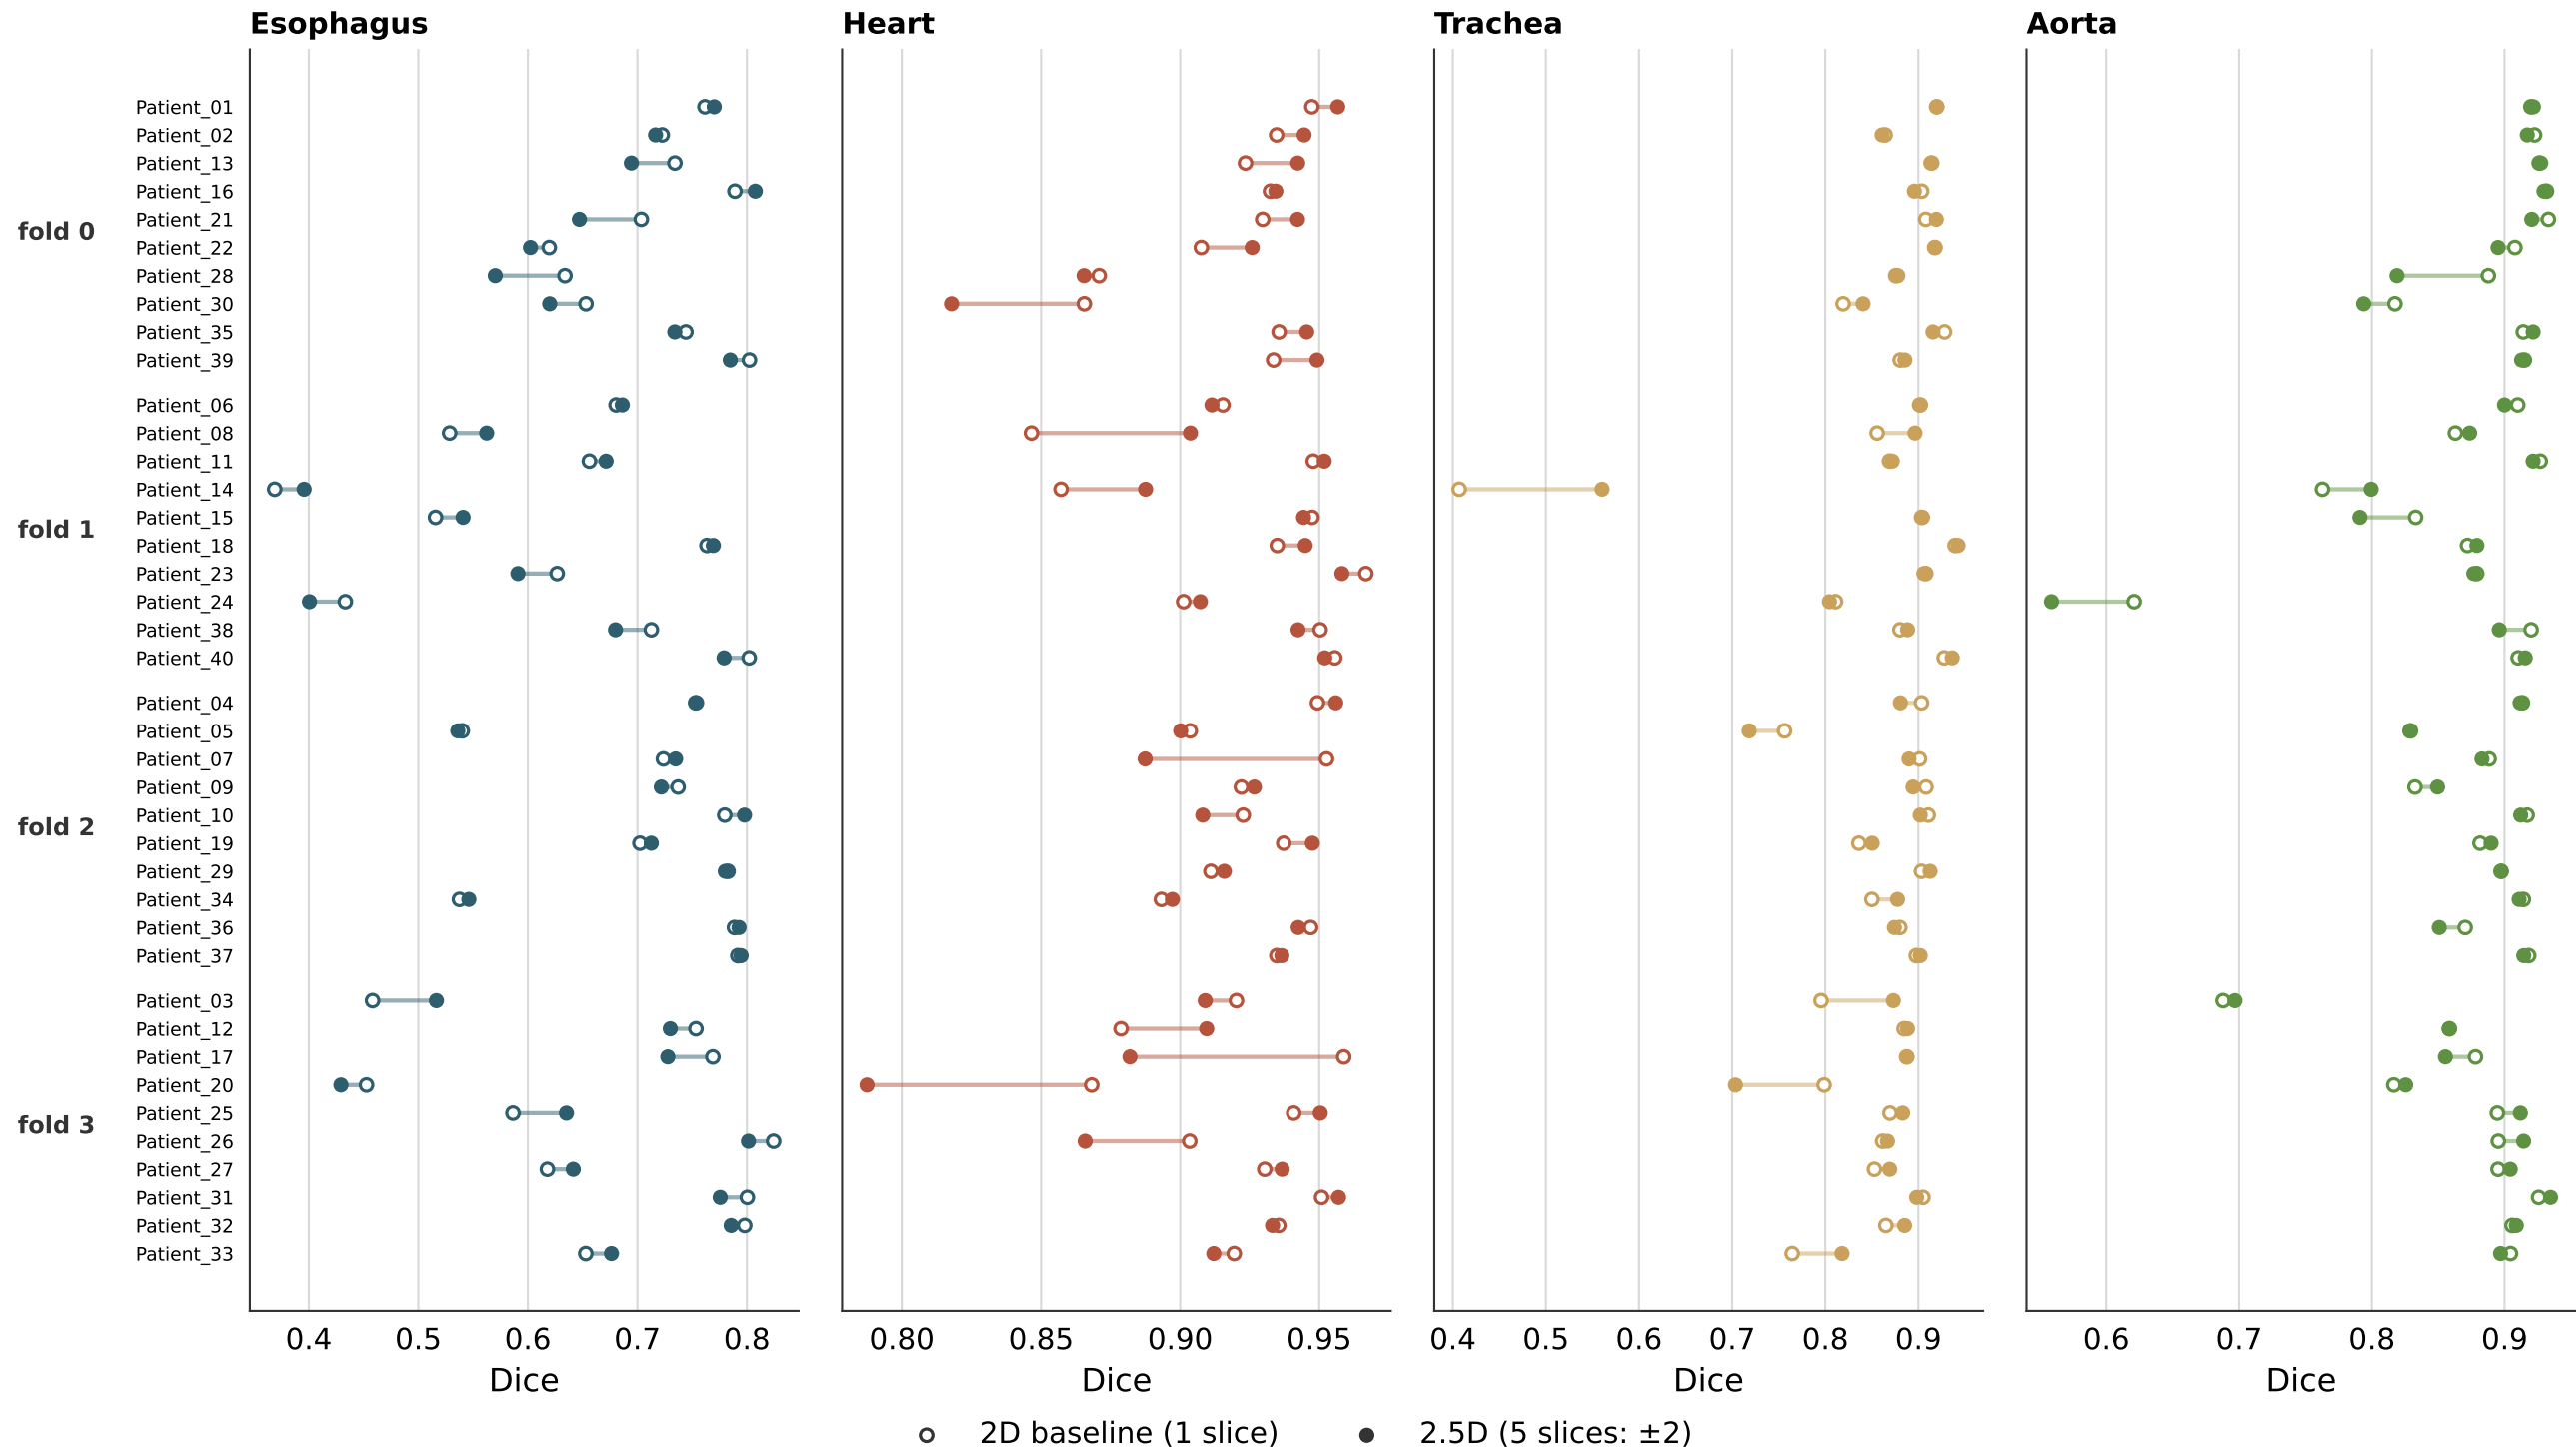

Each patient's 3D Dice (best checkpoint) averaged over 3 seeds.