



Dice: 2.5D context (1, 3 and 5 slices) vs the 2D baseline

4-fold cross-validation × 3 seeds, 40 patients. ENet, 40-patient SEGTHOR train set (corrected labels), median spacing + HU window + z-score + ROI crop, CE + soft Dice loss. 2.5D = the slice and its $\pm k$ neighbours as $2k+1$ input channels, centre slice predicted


Esophagus

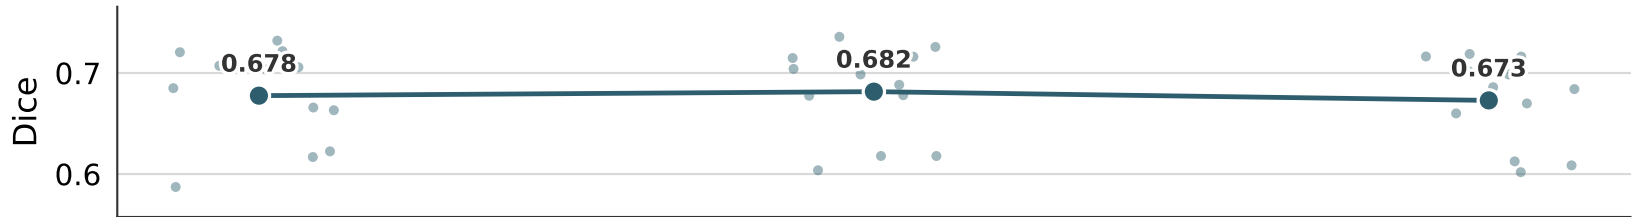


Heart

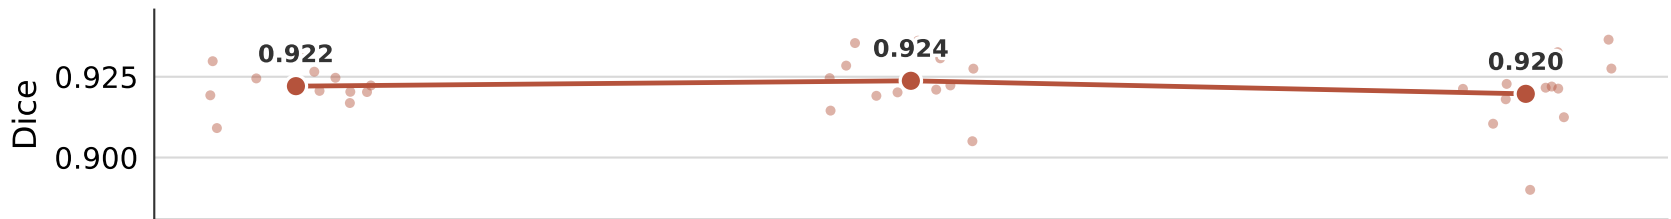


Trachea

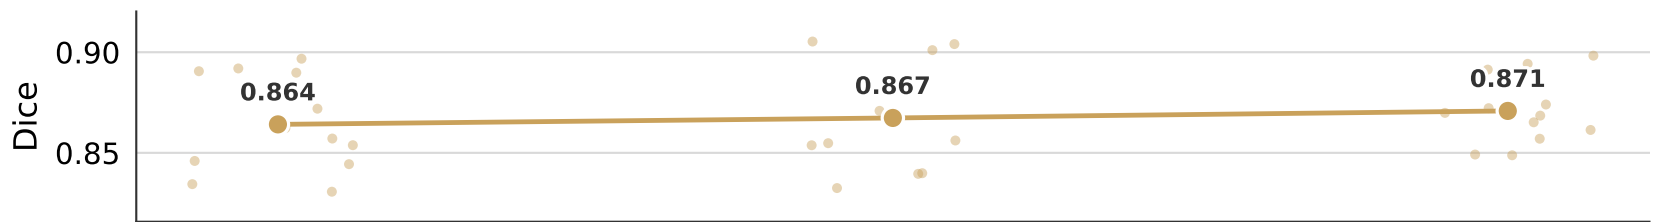

Aorta

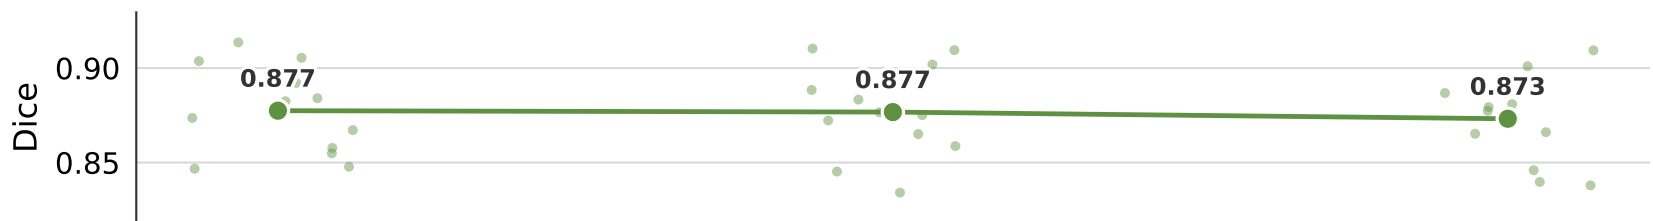

All organs (mean)

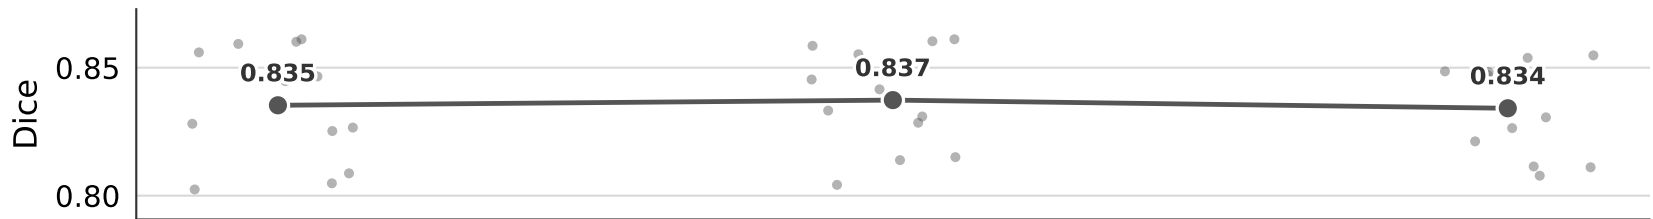

• run (4 folds × 3 seeds) —●— mean of the 12 runs

Dice, 3D on the original CT grid, best checkpoint; each run's value is the mean over the patients of its validation fold. All organs = mean of the 4 organs per run. Y-axes differ per organ.