


A screenshot of a text editor window titled '\*<passwd>'. The window has a menu bar with 'Datei', 'Bearbeiten', 'Suchen', 'Optionen', and 'Hilfe'. The main text area contains the contents of the /etc/passwd file, listing system and regular users with their respective fields (username, password placeholder, UID, GID, full name, home directory, and shell). The users listed are root, daemon, mail, www-data, backup, and pi. A vertical scrollbar is visible on the right side of the text area.

```
root:x:0:0:root:/root:/bin/bash
daemon:x:1:1:daemon:/usr/sbin:/usr/sbin/nologin
mail:x:8:8:mail:/var/mail:/usr/sbin/nologin
www-data:x:33:33:www-data:/var/www:/usr/sbin/nologin
backup:x:34:34:backup:/var/backups:/usr/sbin/nologin
pi:x:1000:1000:,,,:/home/pi:/bin/bash
```

Datei /etc/passwd: Benutzerkonten

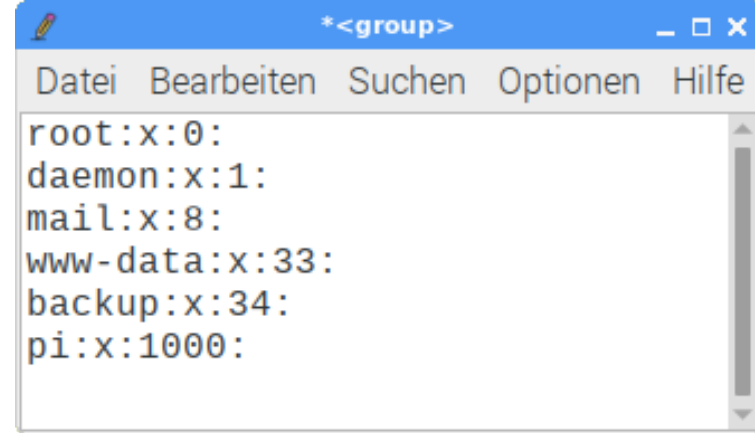

A screenshot of a text editor window titled '\*<group>'. The window has a menu bar with 'Datei', 'Bearbeiten', 'Suchen', 'Optionen', and 'Hilfe'. The main text area contains the contents of the /etc/group file, listing system and regular groups with their respective fields (group name, password placeholder, GID, and members). The groups listed are root, daemon, mail, www-data, backup, and pi. A vertical scrollbar is visible on the right side of the text area.

```
root:x:0:
daemon:x:1:
mail:x:8:
www-data:x:33:
backup:x:34:
pi:x:1000:
```

Datei /etc/group: Benutzergruppen