



Semana 6

Primeros pasos con Windows Server 2022

ASIGNATURA:

Sistemas Operativos

APRENDIZAJE ESPERADO

En esta actividad lograrás distinguir los intérpretes de comandos, realizar las acciones o ejecutar comandos que permiten la administración de: Servicios, Redes, Firewall

De este modo, aprenderás a ejecutar comandos y acciones que permitan programar una tarea, habilitar y configurar un servidor web usando el servicio IIS de Windows

INSTRUCCIONES GENERALES

Estimado(a) estudiante:

- Una vez realizada la lectura comprensiva del material de estudio de la semana n°6, te invitamos a realizar una serie de ejercicios de aplicación de conocimientos para poner en contexto práctico lo aprendido conceptualmente.
- Para responder las preguntas y/o realizar la siguiente actividad, refiérase principalmente a los contenidos trabajados en las semanas previas. También puedes recurrir a fuentes de información segura en Internet. En este caso debes declarar las referencias.
- Al finalizar la actividad te invitamos a responder una autoevaluación para que verifiques el logro de tu aprendizaje asociado a esta actividad

ACTIVIDAD

A continuación, te invitamos a desarrollar tres ejercicios de aplicación de los conocimientos tratados en los contenidos de la semana n°6.




Esta actividad se complementa con una pauta de autoevaluación al finalizar, para que verifiques el logro

I. EJERCICIO 1


1. b
2. c
3. ipconfig /release6
4. d

II. EJERCICIO 2


1. Deshabilitar servicio


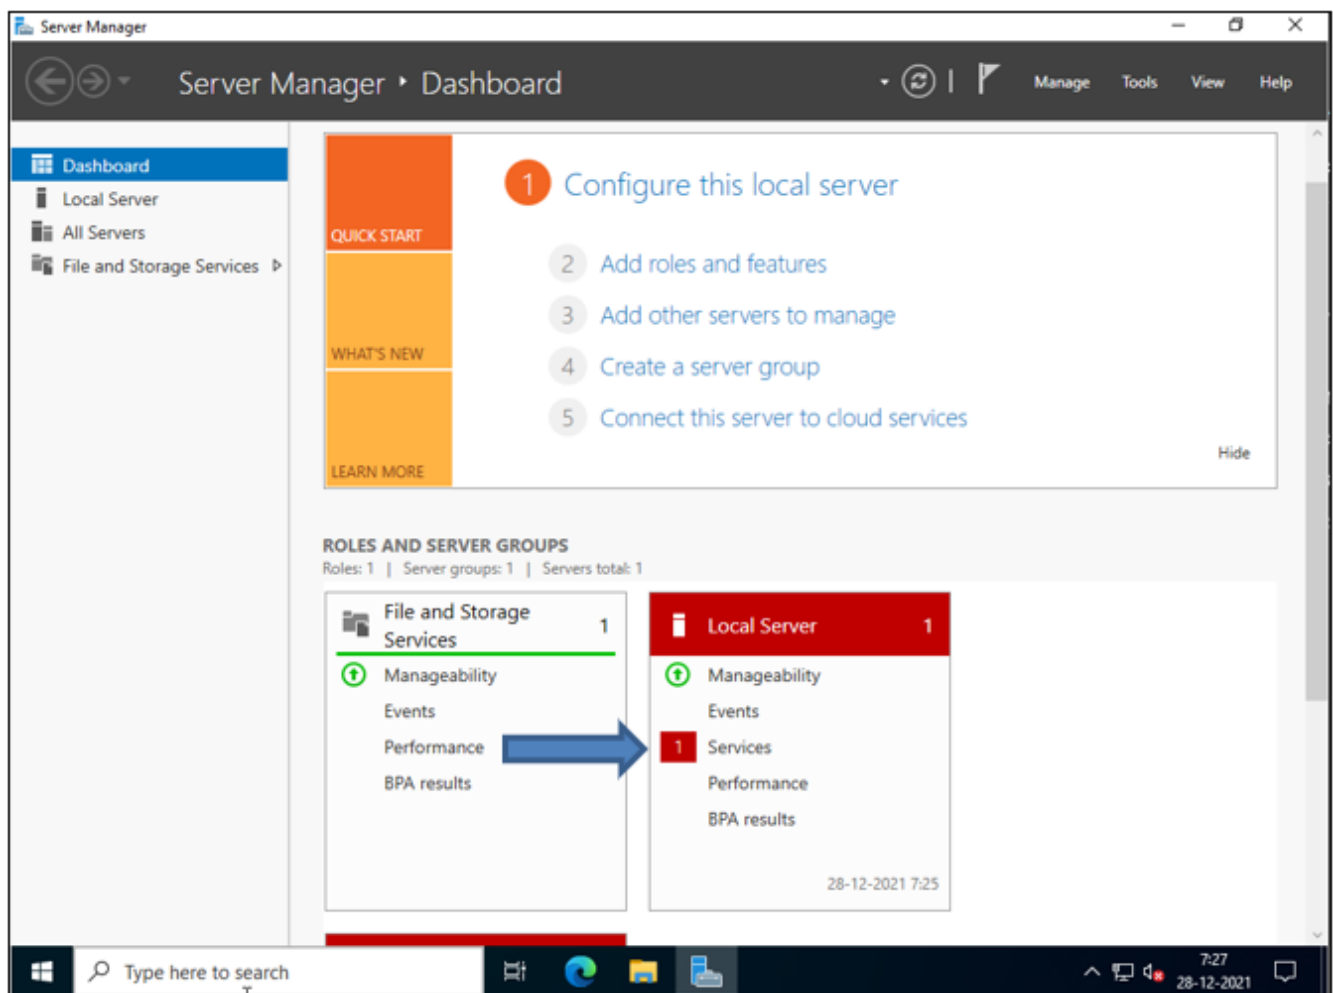


Obtener nombre del servicio

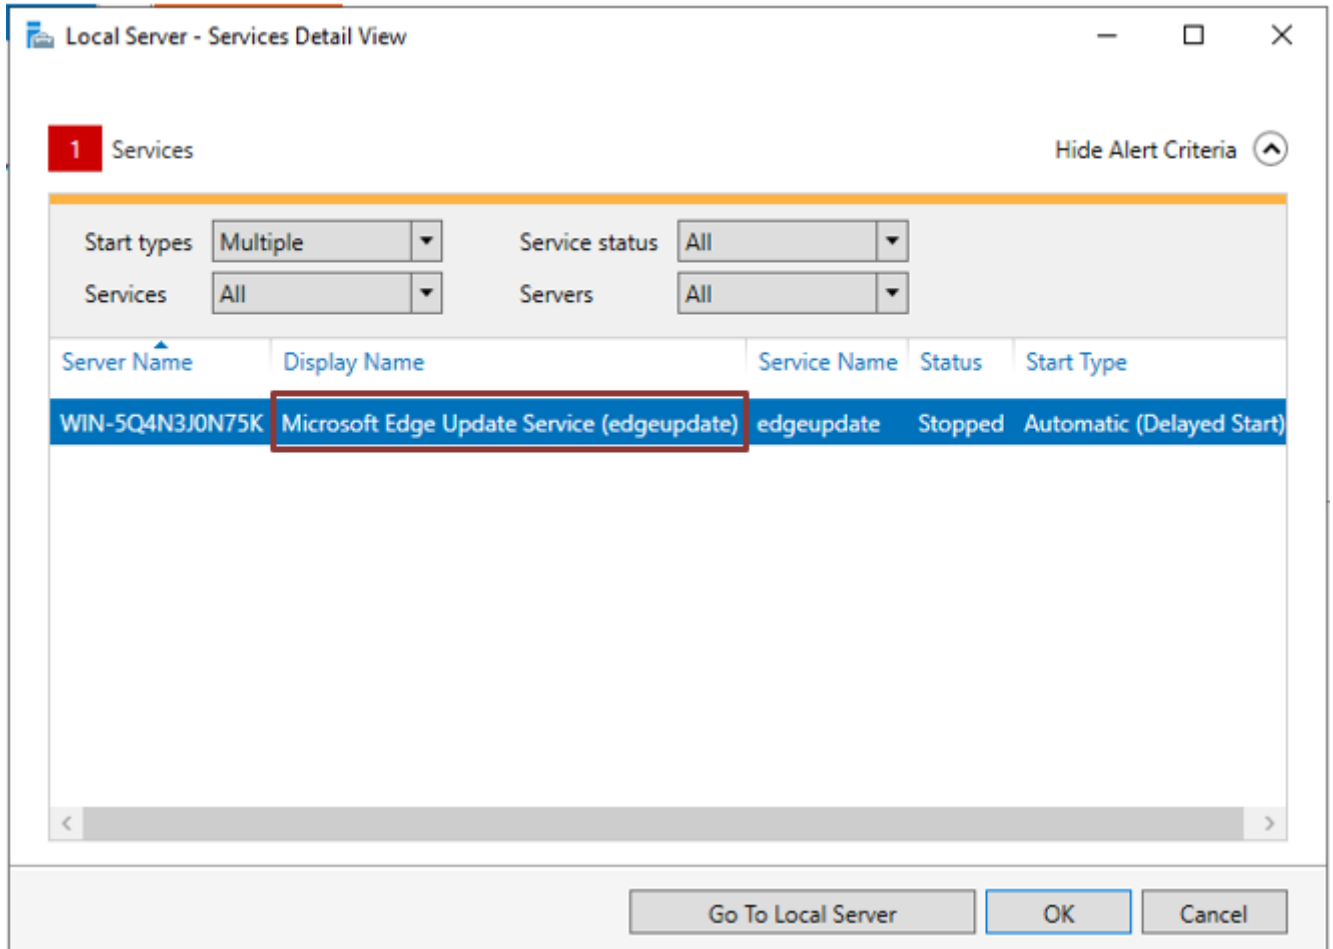

Abrir consola de servicios

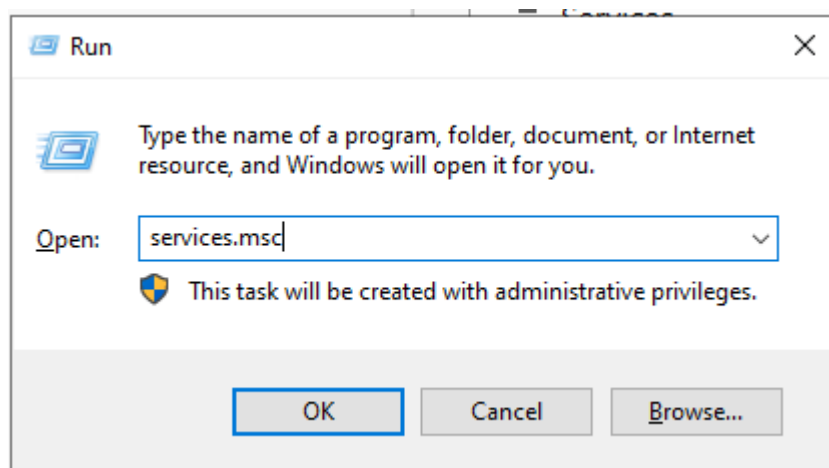

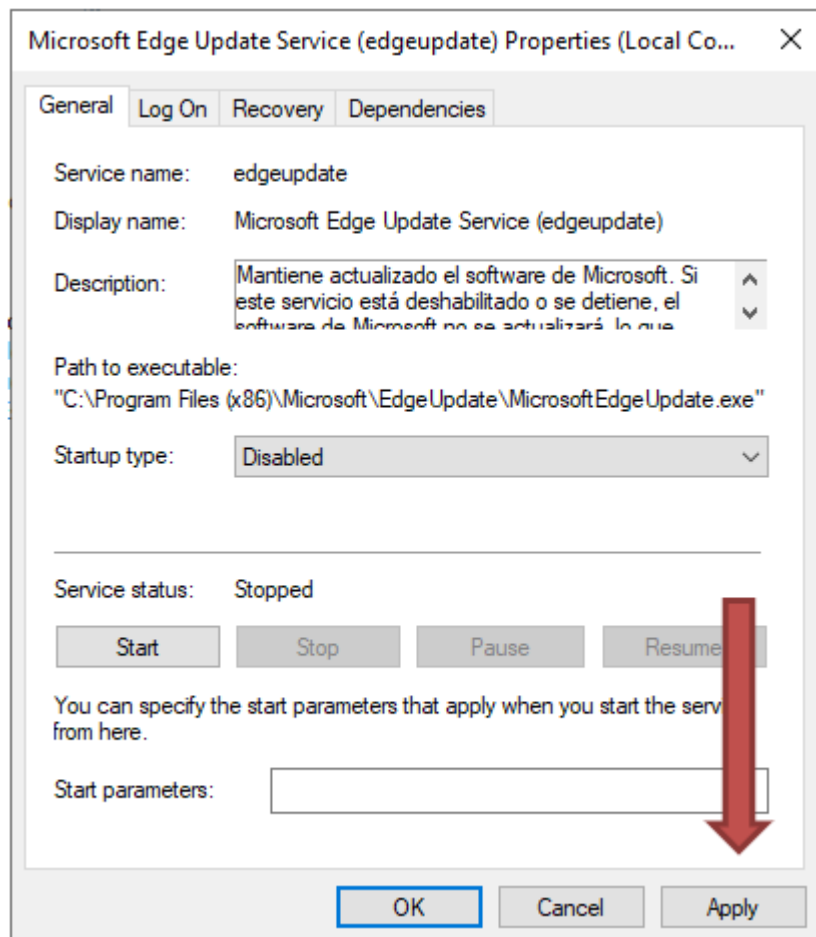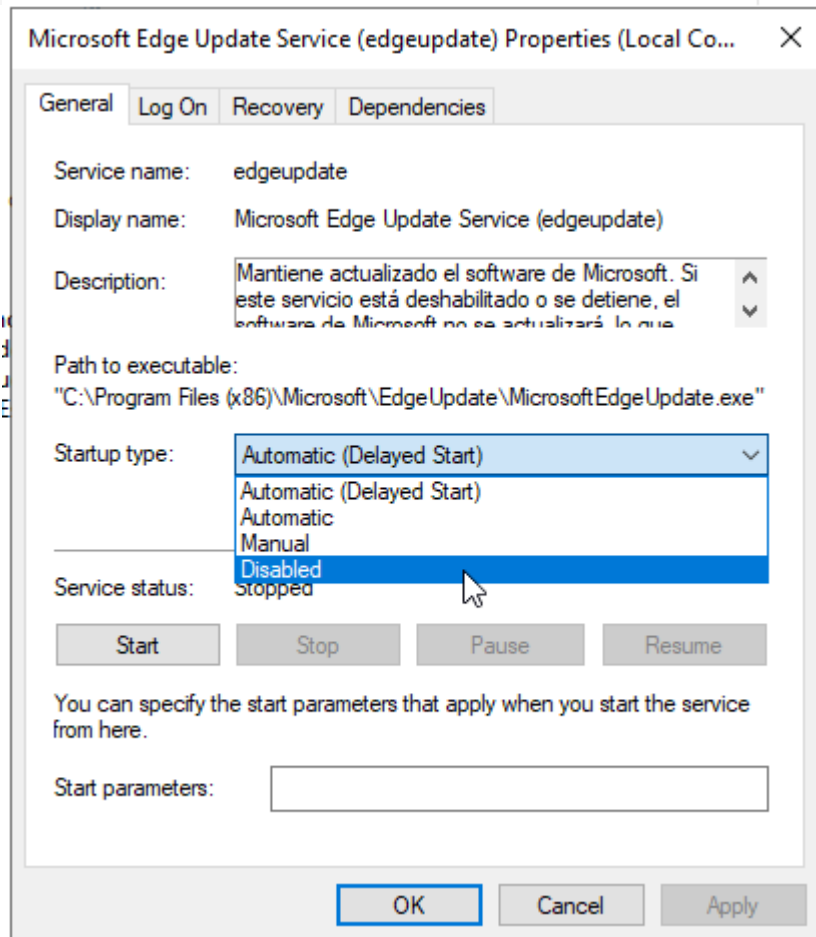


Ahora, el servicio está deshabilitado, y el mensaje que salía en Server Manager, desaparecerá

Services (Local)

Microsoft Edge Update Service (edgeupdate)

Description:
Mantiene actualizado el software de Microsoft. Si este servicio está deshabilitado o se detiene, el software de Microsoft no se actualizará, lo que significa que no se podrán corregir las vulnerabilidades que puedan surgir y es posible que las características no funcionen. Este servicio desinstalará cuando el software de Microsoft no lo esté usando.

Name	Description	Status	Startup Type	Log On As
IKE and AuthIP IPsec Keying Modules	The IKEEXT ...		Manual (Trig...	Local Syste...
Internet Connection Sharing (ICS)	Provides ne...		Disabled	Local Syste...
IP Helper	Provides tu...	Running	Automatic	Local Syste...
IPsec Policy Agent	Internet Pro...		Manual (Trig...	Network S...
KDC Proxy Server service (KPS)	KDC Proxy ...		Manual	Network S...
KtmRm for Distributed Transaction Coordinator	Coordinates...		Manual (Trig...	Network S...
Link-Layer Topology Discovery Mapper	Creates a N...		Disabled	Local Service
Local Session Manager	Core Windo...	Running	Automatic	Local Syste...
McpManagementService	<Failed to R...		Manual	Local Syste...
Microsoft (R) Diagnostics Hub Standard Collector Service	Diagnostics ...		Manual	Local Syste...
Microsoft Account Sign-in Assistant	Enables use...		Manual (Trig...	Local Syste...
Microsoft App-V Client	Manages A...		Disabled	Local Syste...
Microsoft Defender Antivirus Network Inspection Service	Helps guard...	Running	Manual	Local Service
Microsoft Defender Antivirus Service	Helps prote...	Running	Automatic	Local Syste...
Microsoft Edge Elevation Service (MicrosoftEdgeElevationS...	Keeps Micr...		Manual	Local Syste...
Microsoft Edge Update Service (edgeupdate)	Mantiene a...		Disabled	Local Syste...

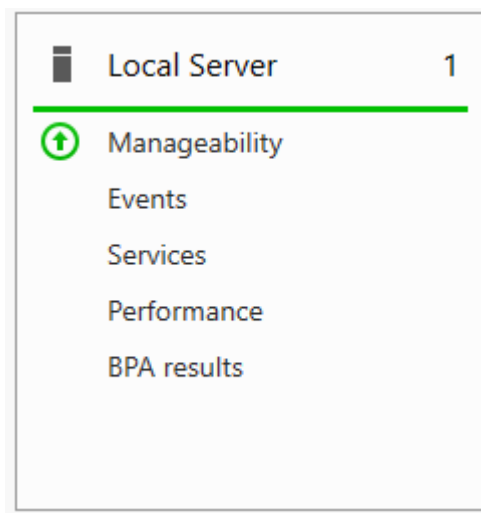

2. Reglas para MySQL

- Regla MySQL TCP de entrada

New Inbound Rule Wizard

Rule Type

Select the type of firewall rule to create.

Steps:

- Rule Type
- Protocol and Ports
- Action
- Profile
- Name

What type of rule would you like to create?

☐ **Program**
Rule that controls connections for a program.

☒ **Port**
Rule that controls connections for a TCP or UDP port.

☐ **Predefined:**
AllJoyn Router
Rule that controls connections for a Windows experience.

☐ **Custom**
Custom rule.

< Back Next > Cancel

New Inbound Rule Wizard

Protocol and Ports

Specify the protocols and ports to which this rule applies.

Steps:

- Rule Type
- Protocol and Ports
- Action
- Profile
- Name

Does this rule apply to TCP or UDP?

☒ **TCP**
☐ **UDP**

Does this rule apply to all local ports or specific local ports?

☐ **All local ports**
☒ **Specific local ports:**
Example: 80, 443, 5000-5010

New Inbound Rule Wizard

Action

Specify the action to be taken when a connection matches the conditions specified in the rule.

Steps:

- Rule Type
- Protocol and Ports
- Action**
- Profile
- Name

What action should be taken when a connection matches the specified conditions?

☐ **Allow the connection**
This includes connections that are protected with IPsec as well as those are not.

☐ **Allow the connection if it is secure**
This includes only connections that have been authenticated by using IPsec. Connections will be secured using the settings in IPsec properties and rules in the Connection Security Rule node.

☒ **Block the connection**

New Inbound Rule Wizard

Profile

Specify the profiles for which this rule applies.

Steps:

- Rule Type
- Protocol and Ports
- Action
- Profile**
- Name

When does this rule apply?

☐ **Domain**
Applies when a computer is connected to its corporate domain.

☐ **Private**
Applies when a computer is connected to a private network location, such as a home or work place.

☒ **Public**
Applies when a computer is connected to a public network location.

New Inbound Rule Wizard

Name

Specify the name and description of this rule.


Steps:

- Rule Type
- Protocol and Ports
- Action
- Profile
- Name**

Name:

Description (optional):

- Regla MySQL UDP de entrada

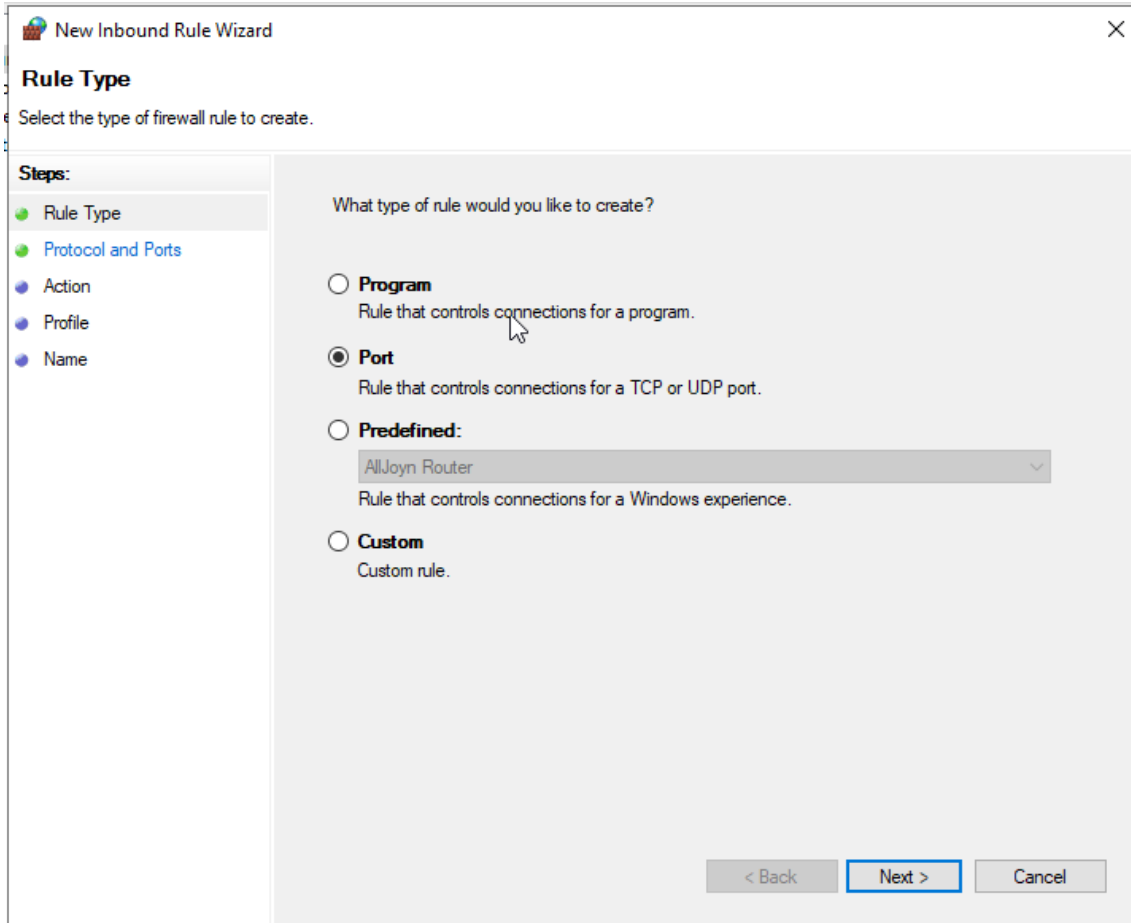

New Inbound Rule Wizard

Rule Type

Select the type of firewall rule to create.

Steps:

- Rule Type
- Protocol and Ports
- Action
- Profile
- Name

What type of rule would you like to create?


☐ **Program**
Rule that controls connections for a program.

☒ **Port**
Rule that controls connections for a TCP or UDP port.

☐ **Predefined:**
AllJoyn Router
Rule that controls connections for a Windows experience.

☐ **Custom**
Custom rule.

< Back Next > Cancel

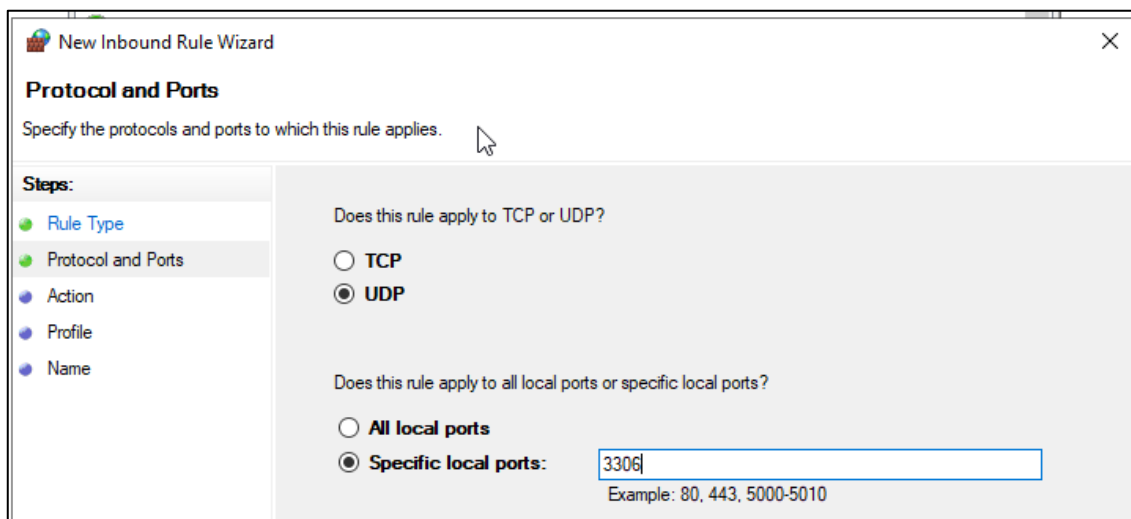

New Inbound Rule Wizard

Protocol and Ports

Specify the protocols and ports to which this rule applies.

Steps:

- Rule Type
- Protocol and Ports
- Action
- Profile
- Name

Does this rule apply to TCP or UDP?

☐ **TCP**

☒ **UDP**

Does this rule apply to all local ports or specific local ports?

☐ **All local ports**

☒ **Specific local ports:**
Example: 80, 443, 5000-5010


New Inbound Rule Wizard
✕

Action

Specify the action to be taken when a connection matches the conditions specified in the rule.

Steps:

- Rule Type
- Protocol and Ports
- **Action**
- Profile
- Name

What action should be taken when a connection matches the specified conditions?

☐ **Allow the connection**
 This includes connections that are protected with IPsec as well as those are not.

☐ **Allow the connection if it is secure**
 This includes only connections that have been authenticated by using IPsec. Connections will be secured using the settings in IPsec properties and rules in the Connection Security Rule node.

☒ **Block the connection**


New Inbound Rule Wizard
✕

Action

Specify the action to be taken when a connection matches the conditions specified in the rule.

Steps:

- Rule Type
- Protocol and Ports
- **Action**
- Profile
- Name

What action should be taken when a connection matches the specified conditions?

☐ **Allow the connection**
 This includes connections that are protected with IPsec as well as those are not.

☐ **Allow the connection if it is secure**
 This includes only connections that have been authenticated by using IPsec. Connections will be secured using the settings in IPsec properties and rules in the Connection Security Rule node.

☒ **Block the connection**

New Inbound Rule Wizard

Name
Specify the name and description of this rule.

Steps:

- Rule Type
- Protocol and Ports
- Action
- Profile
- Name**

Name:
MYSQL UDP

Description (optional):

Inbound Rules				
Name	Group	Profile	Enabled	Action
 MYSQL UDP		Public	Yes	Block
 MYSQL TCP		Public	Yes	Block

III. EJERCICIO 3

1. - Script



```
Administrator: Windows PowerShell ISE
File Edit View Tools Debug Add-ons Help
scripts1 X
1 $servername = ([System.Net.DNS]::GetHostByName($env:COMPUTERNAME).HostName)
2 $message = "El servidor $servername está funcionando sin problemas"
3
4 start powershell -ArgumentList "-nologo -nopprofile -command write-host $message; Start-Sleep -Seconds 10"
```

- Tarea programada

a/b/c/d/e Configuración general de la tarea

Server Status with Domain Name Properties (Local Computer)

General Triggers Actions Conditions Settings History (disabled)

Name: Server Status with Domain Name

Location: \

Author: WIN-5Q4N3J0N75K\Administrator

Description: Scheduled Task to show server local status

Security options

When running the task, use the following user account:

Administrator Change User or Group...

☒ Run only when user is logged on

☐ Run whether user is logged on or not

☐ Do not store password. The task will only have access to local computer resources.

☒ Run with highest privileges

☐ Hidden

Configure for: Windows Server 2022

OK Cancel

f/g. Configuración de desencadenador

Edit Trigger

Begin the task: On a schedule

Settings

☐ One time
 ☒ Daily
 ☐ Weekly
 ☐ Monthly

Start: 28-12-2021 9:10:00 ☐ Synchronize across time zones

Recur every: 1 days

Advanced settings

☒ Delay task for up to (random delay): 1 minute

☒ Repeat task every: 5 minutes for a duration of: Indefinitely

☐ Stop all running tasks at end of repetition duration

☐ Stop task if it runs longer than: 3 days

☐ Expire: 28-12-2022 9:12:21 ☐ Synchronize across time zones

☒ Enabled


OK Cancel

h. Acción a ejecutar

En el campo Programa o script, escribir **PowerShell**

En el campo Agregar argumentos, escribir:

-File "C:\Users\Administrator\Desktop\script.ps1"

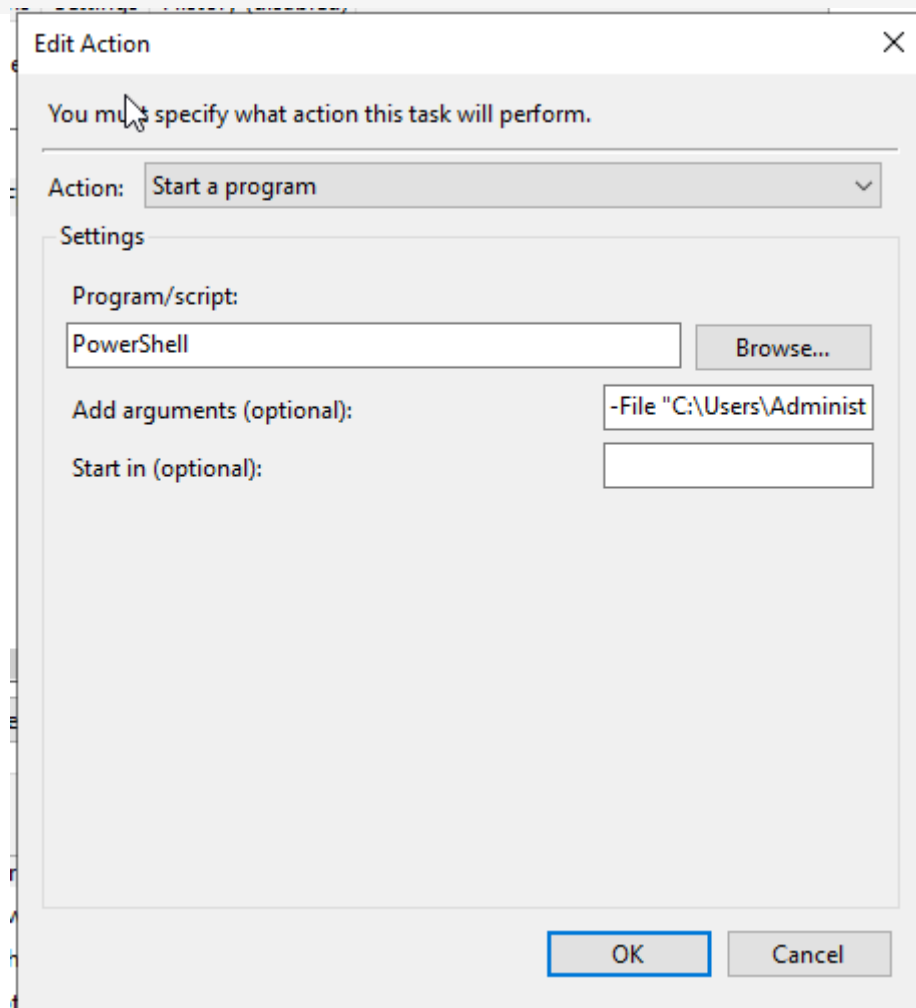

i/j. Configuraciones adicionales

Create Task

General

Triggers

Actions

Conditions

Settings

Specify additional settings that affect the behavior of the task.

☒

 Allow task to be run on demand

☒

 Run task as soon as possible after a scheduled start is missed

☐

 If the task fails, restart every:

1 minute

Attempt to restart up to:

3

 times

☒

 Stop the task if it runs longer than:

1 hour

☒

 If the running task does not end when requested, force it to stop

☐

 If the task is not scheduled to run again, delete it after:


30 days

If the task is already running, then the following rule applies:



Do not start a new instance

OK

Cancel


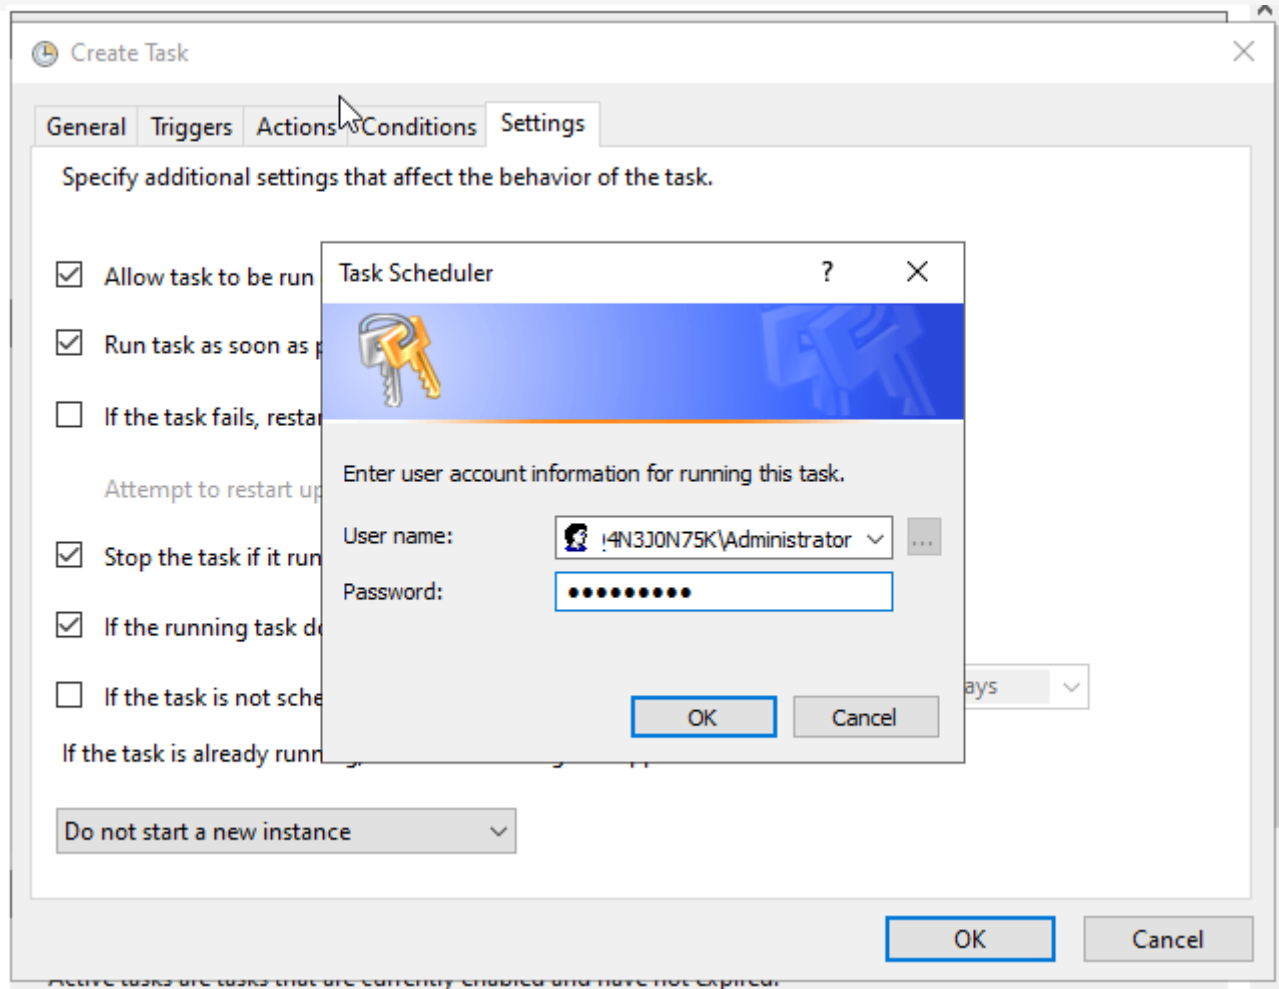




k. Ejecución de prueba

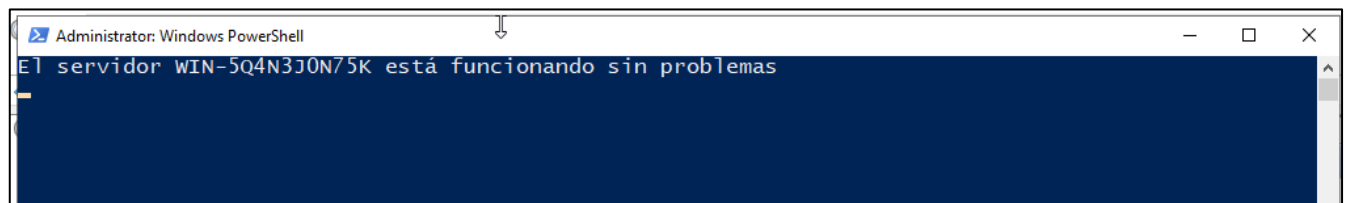
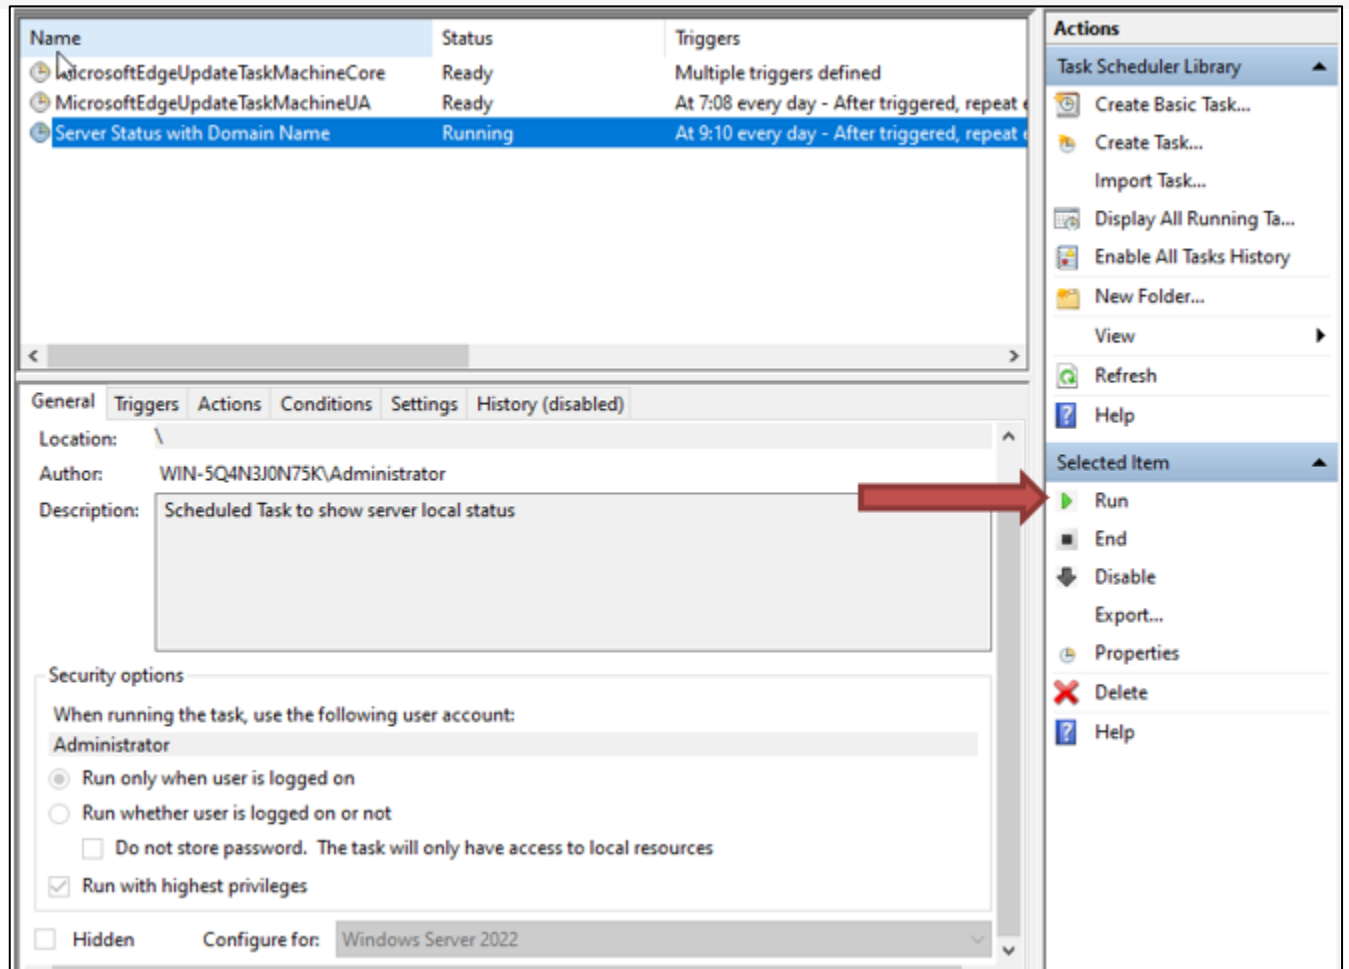



IV. EJERCICIO 4



- Agregar rol IIS

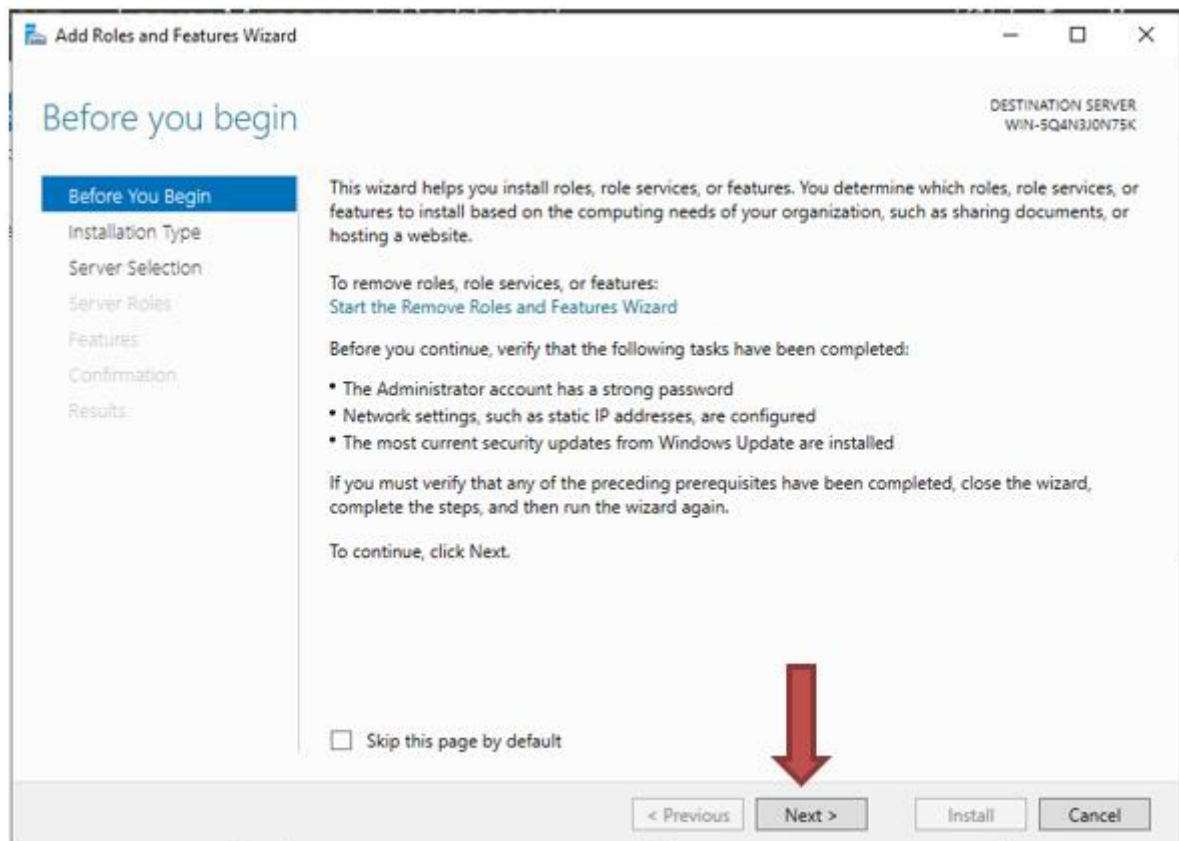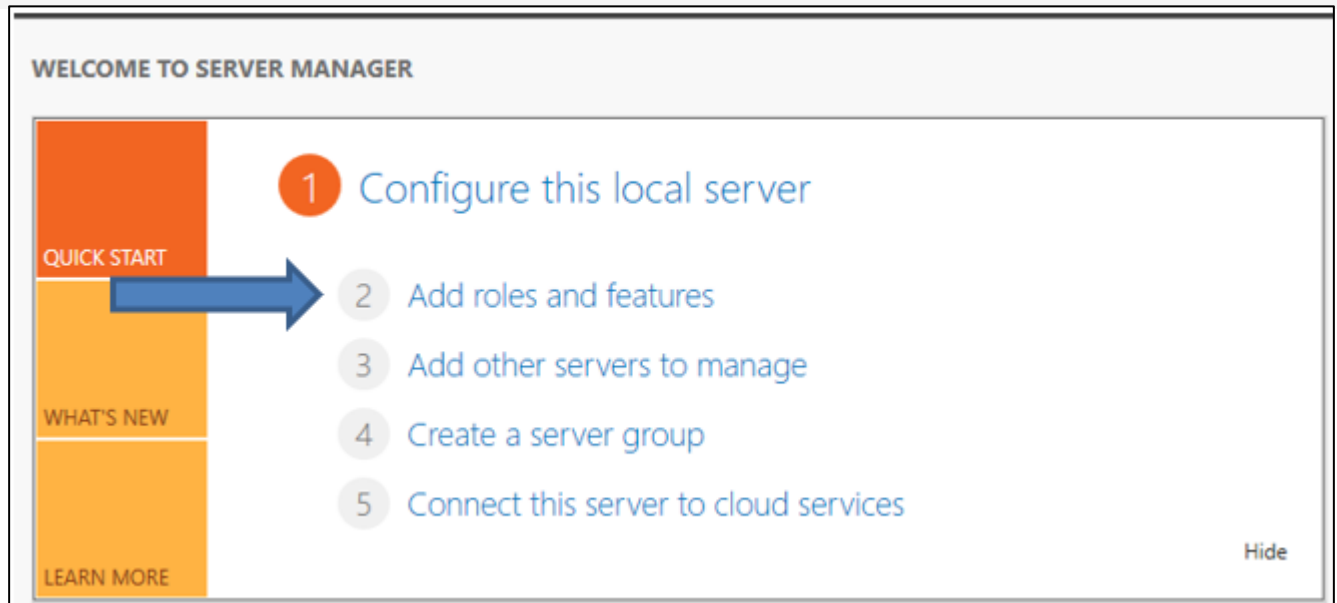


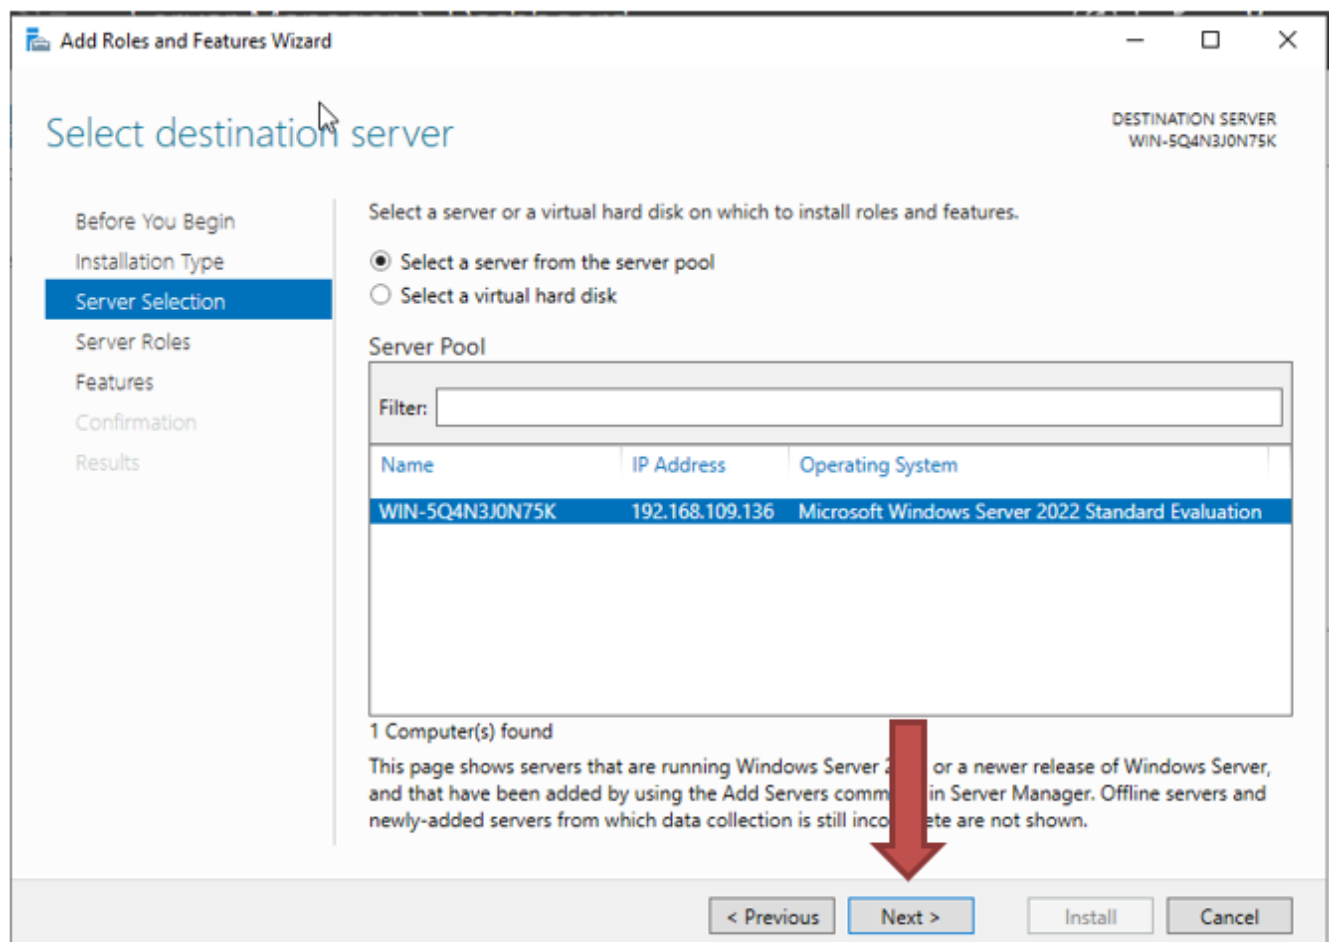
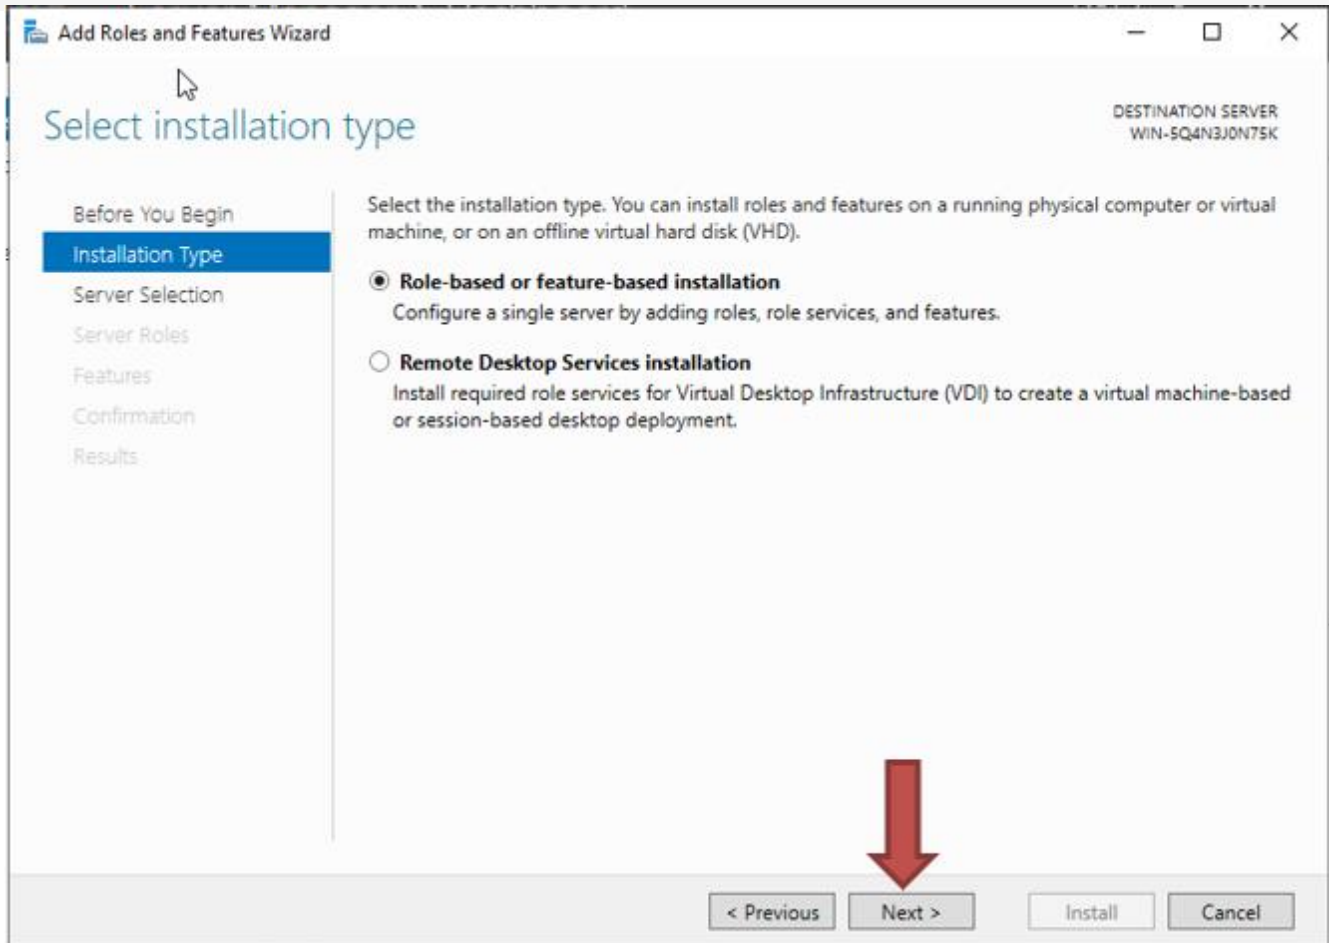


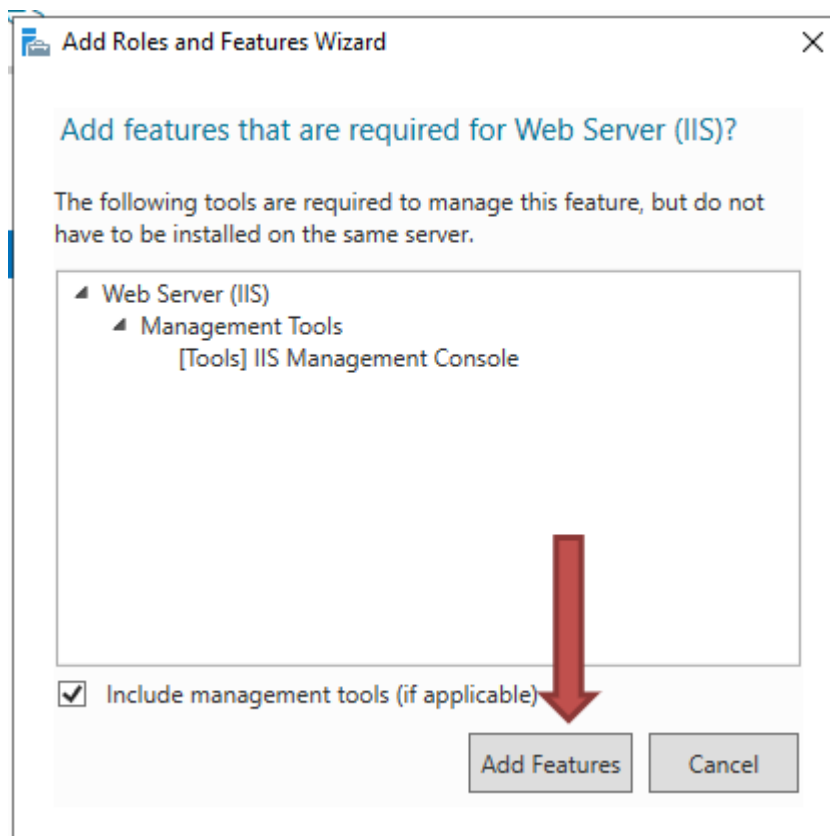
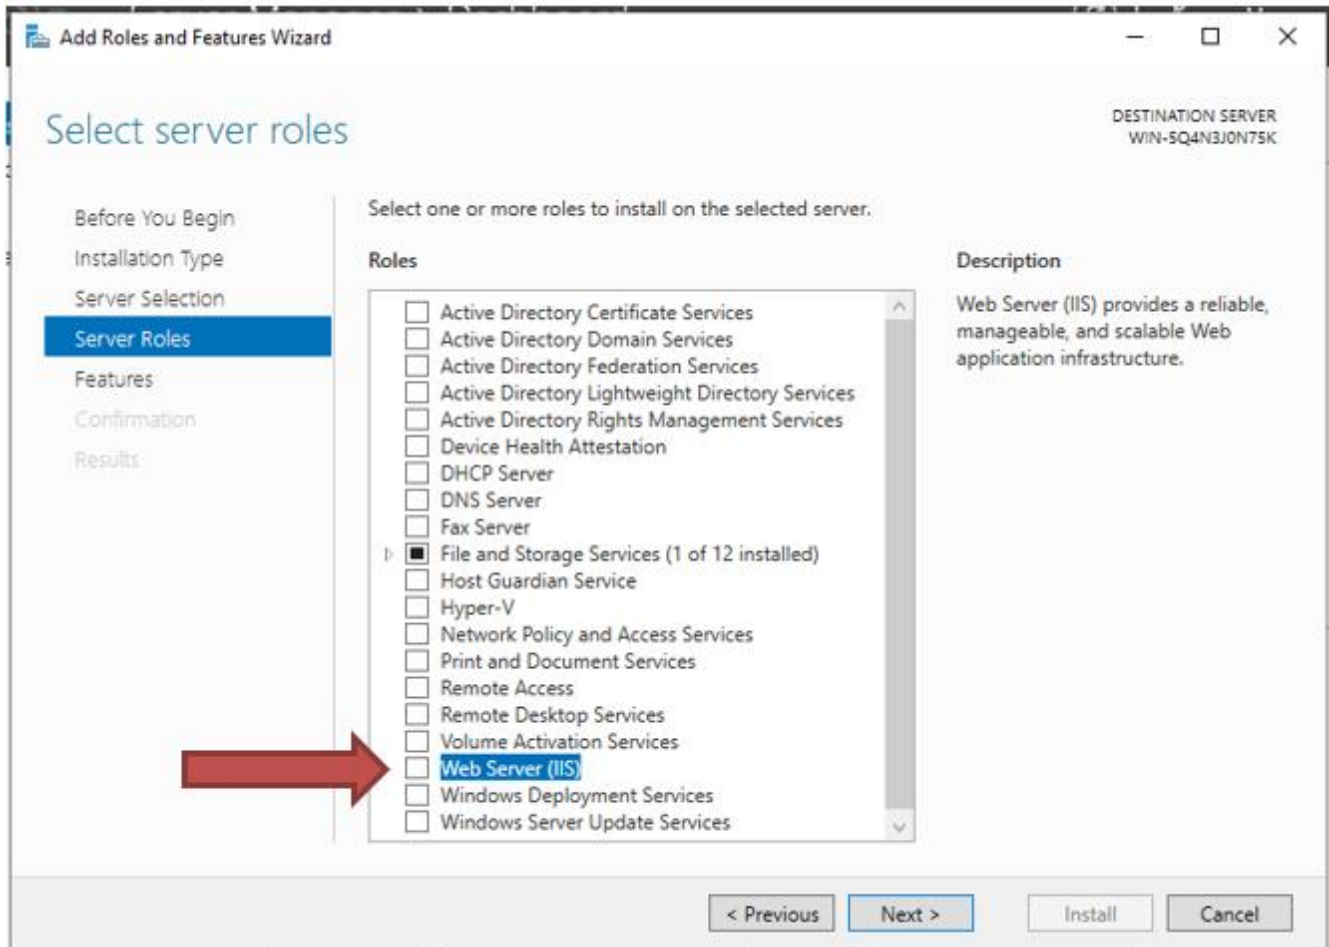


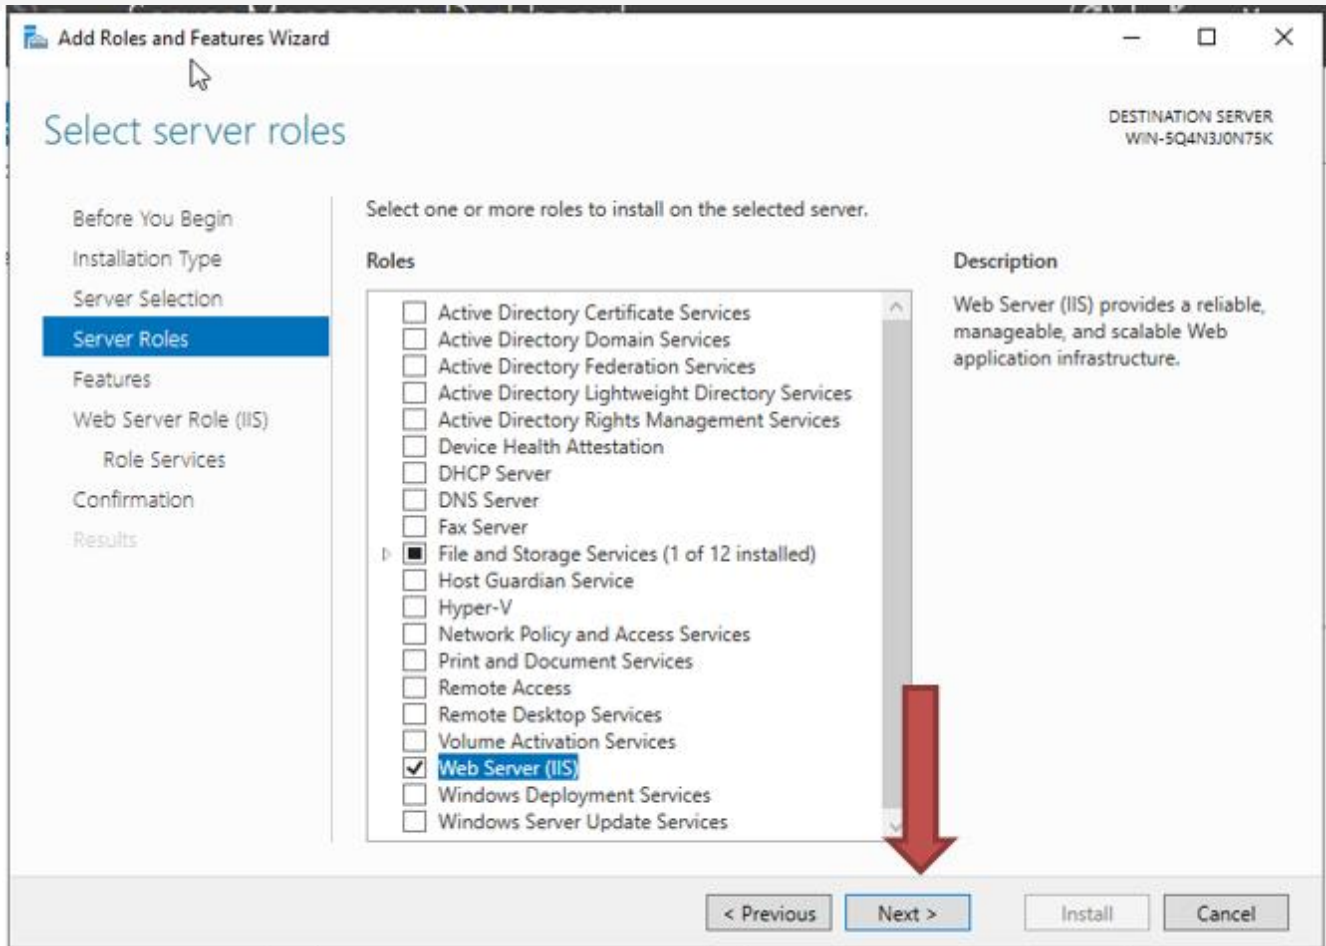


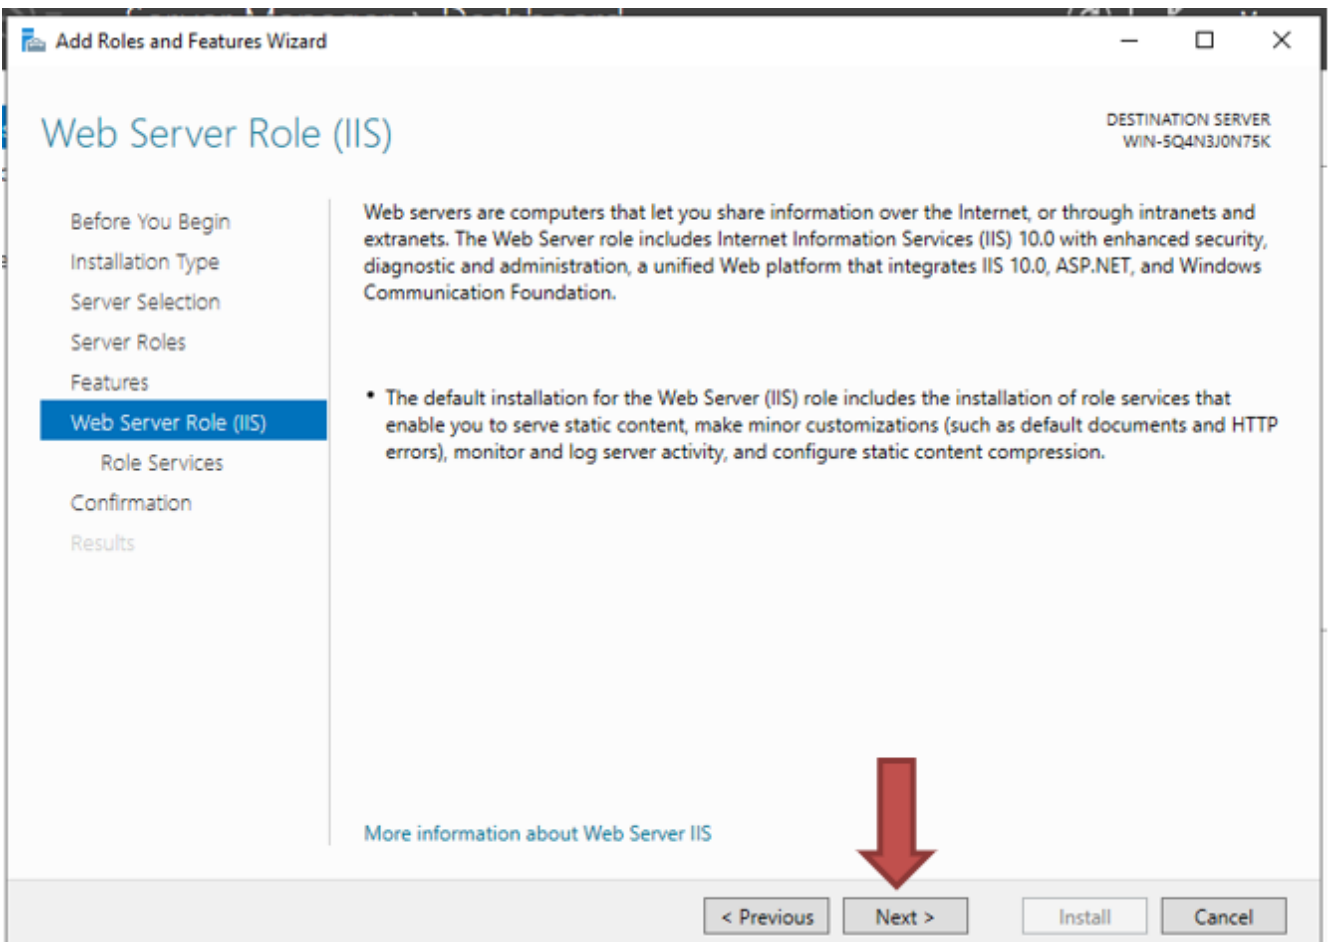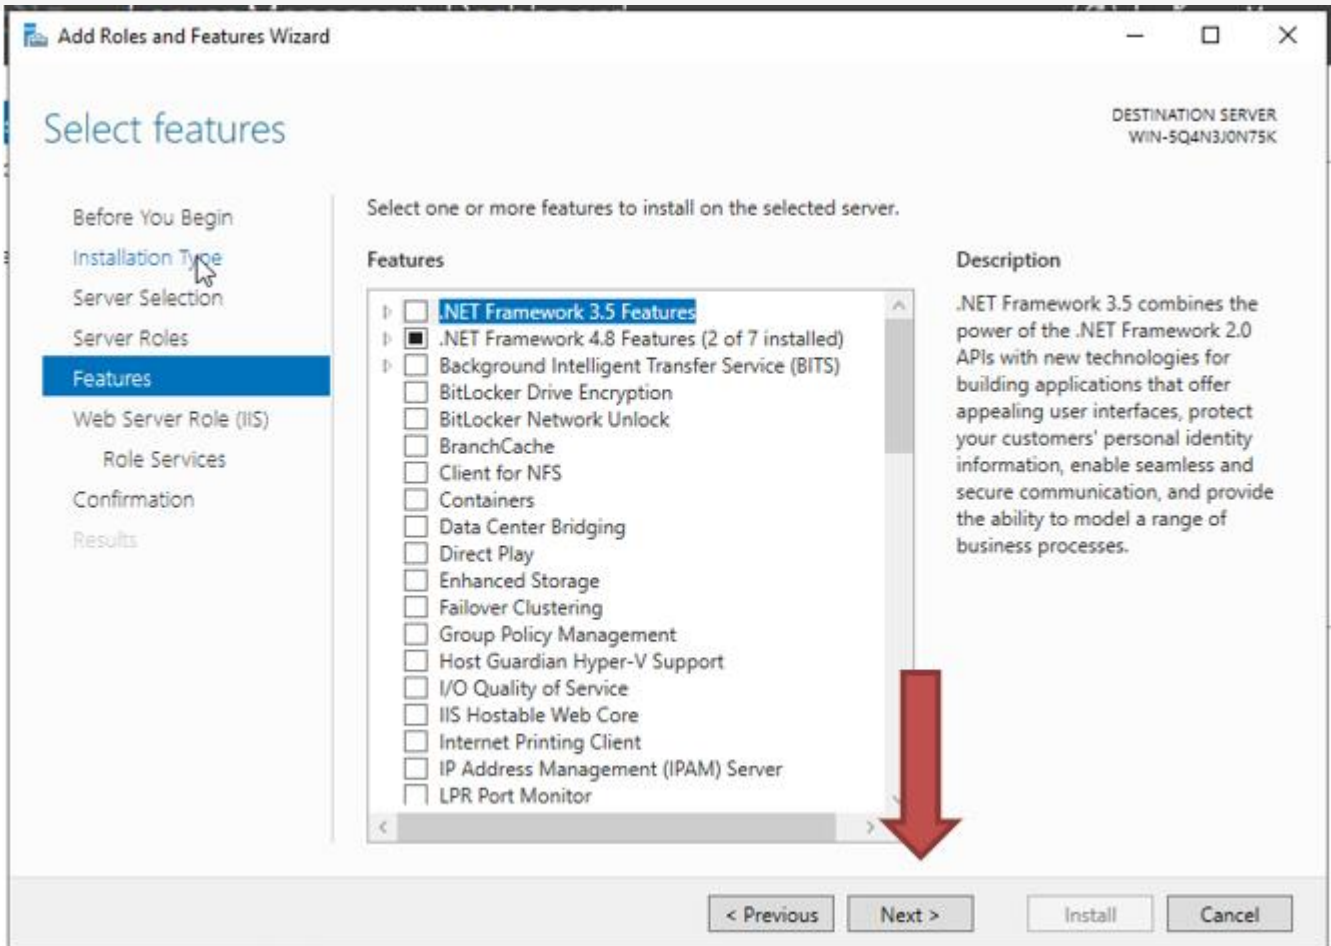


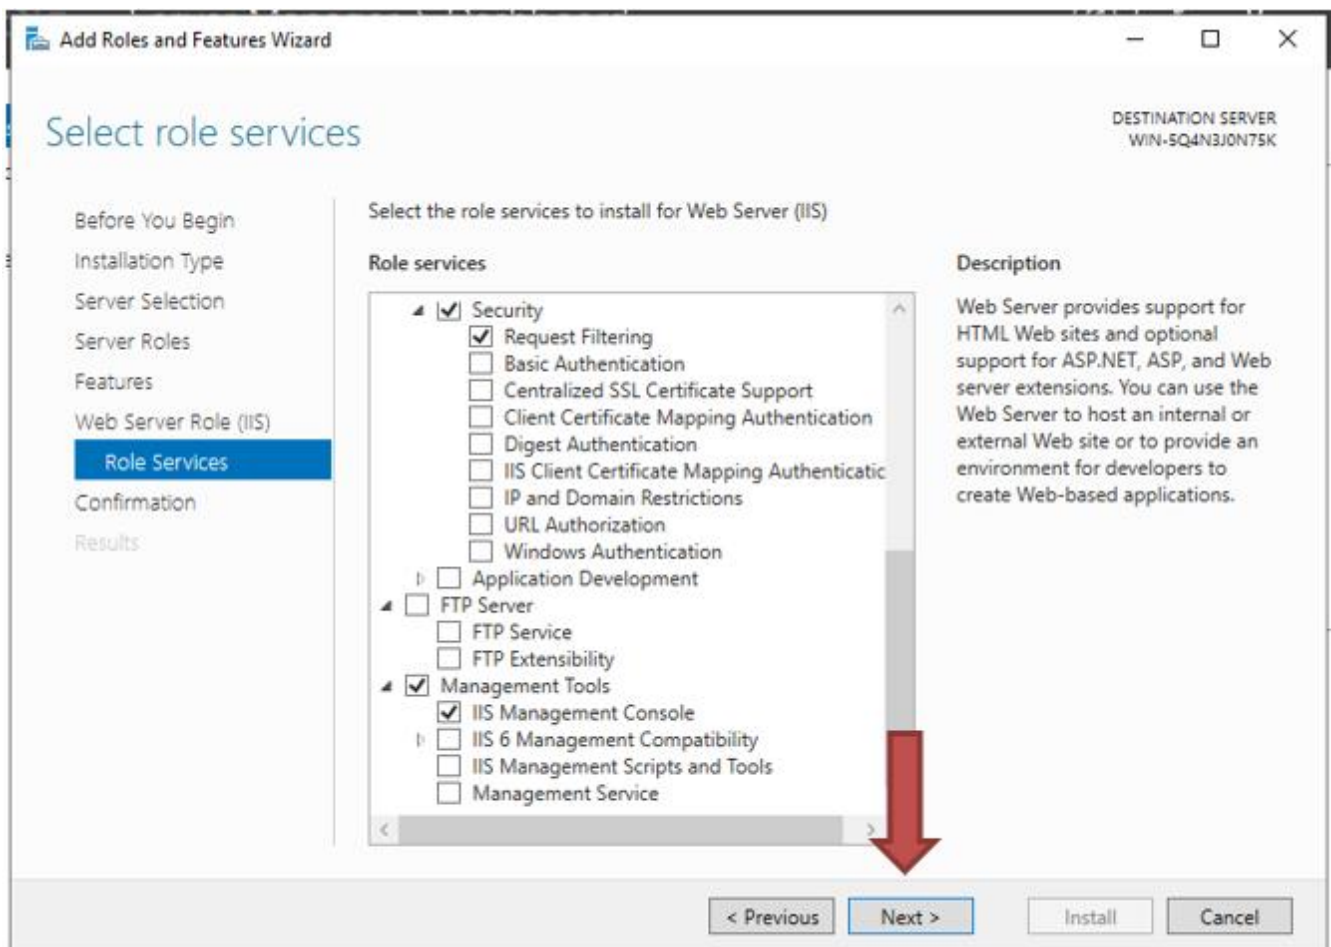


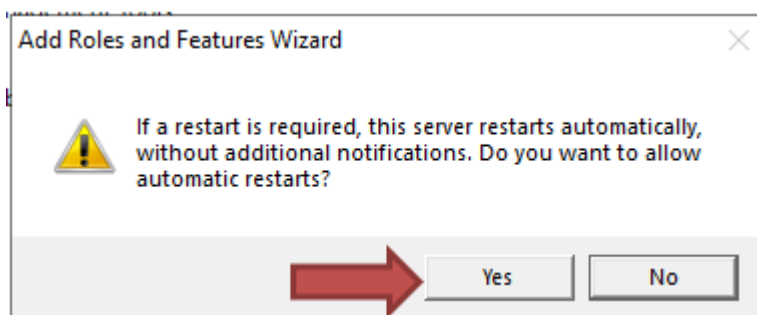
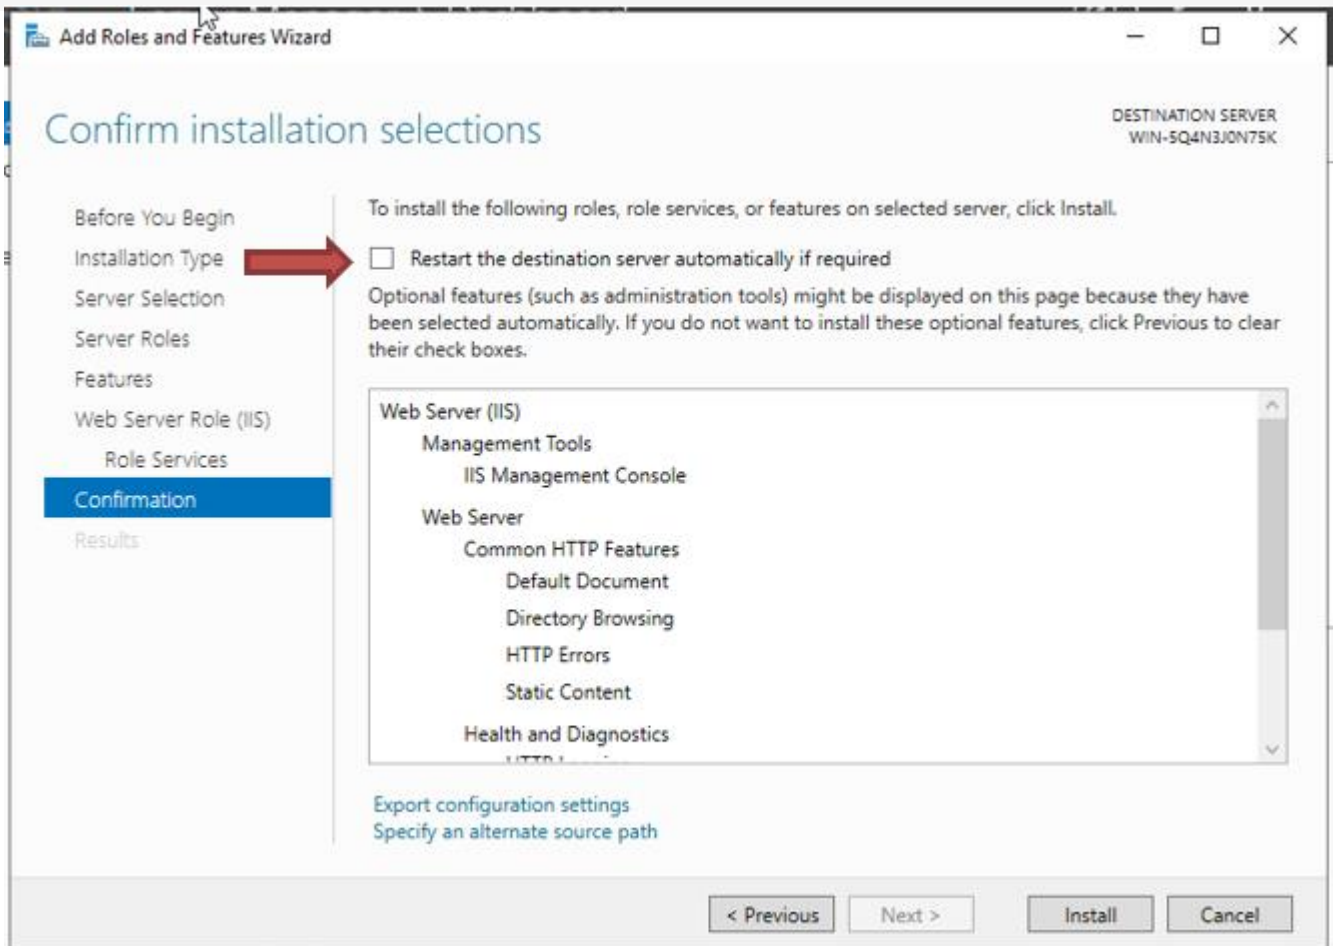


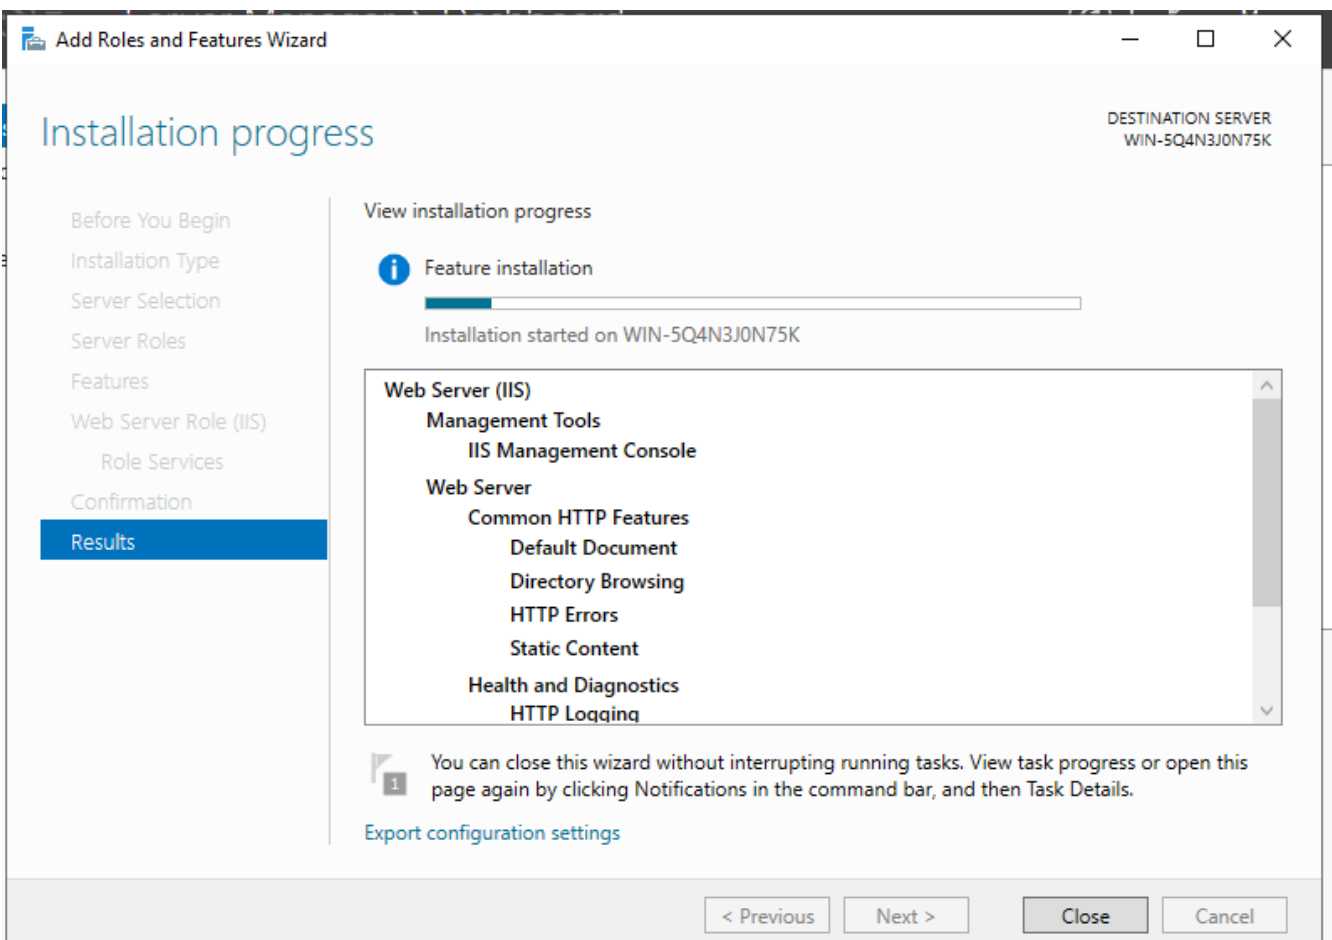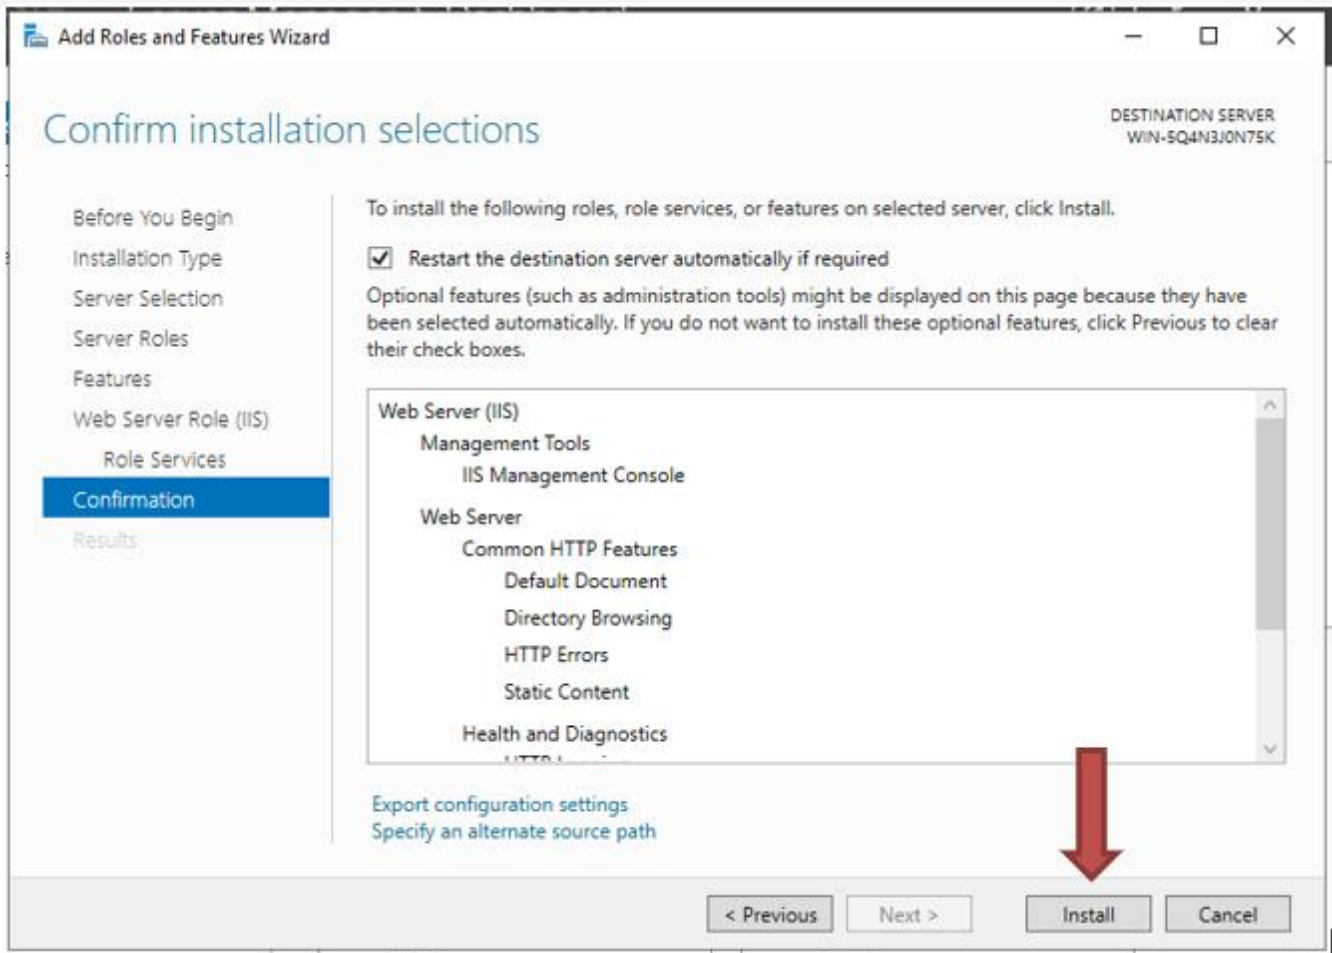

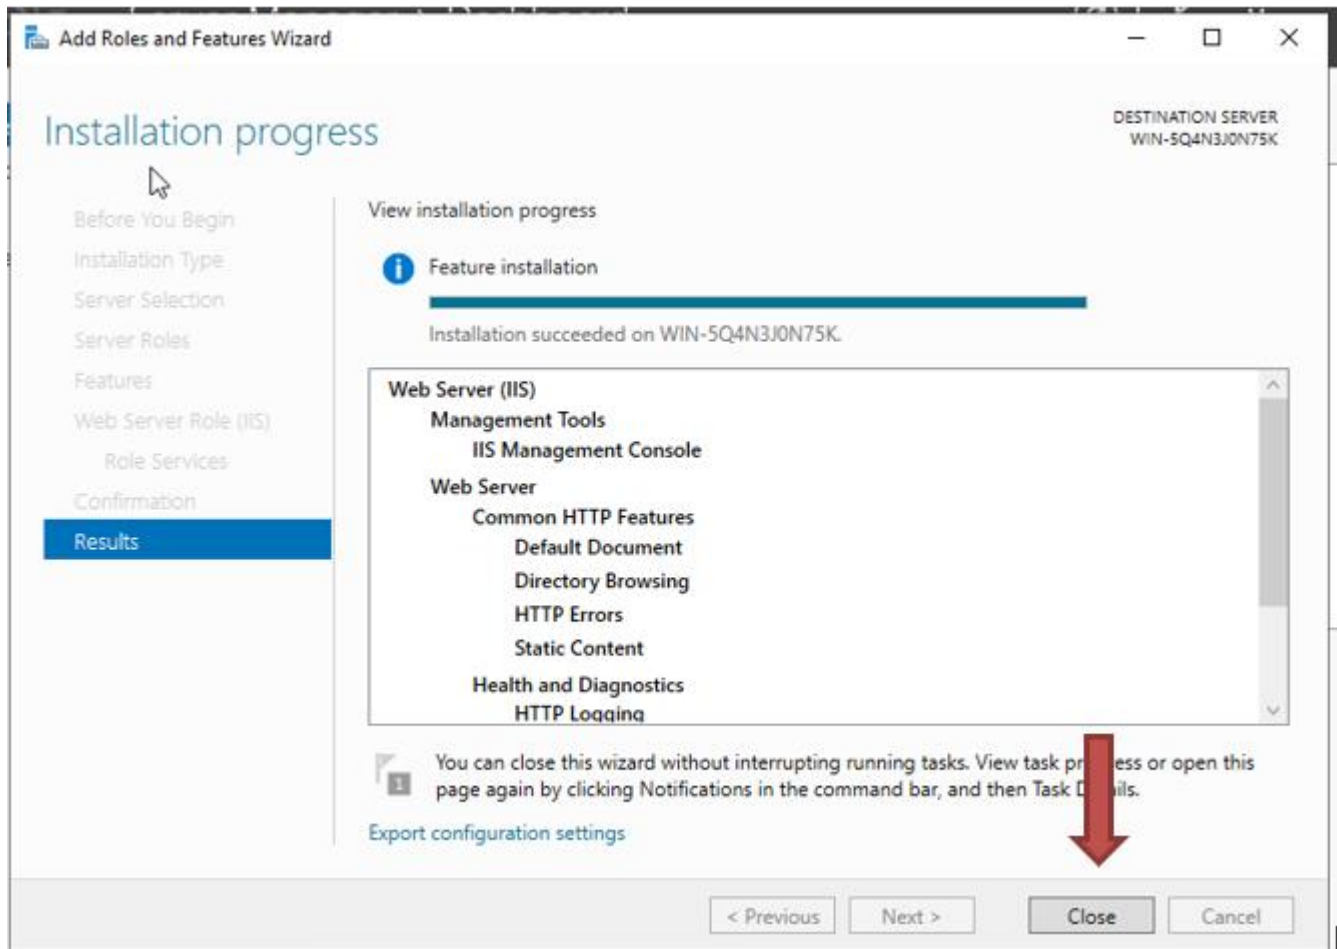


b. Creando sitio web de prueba

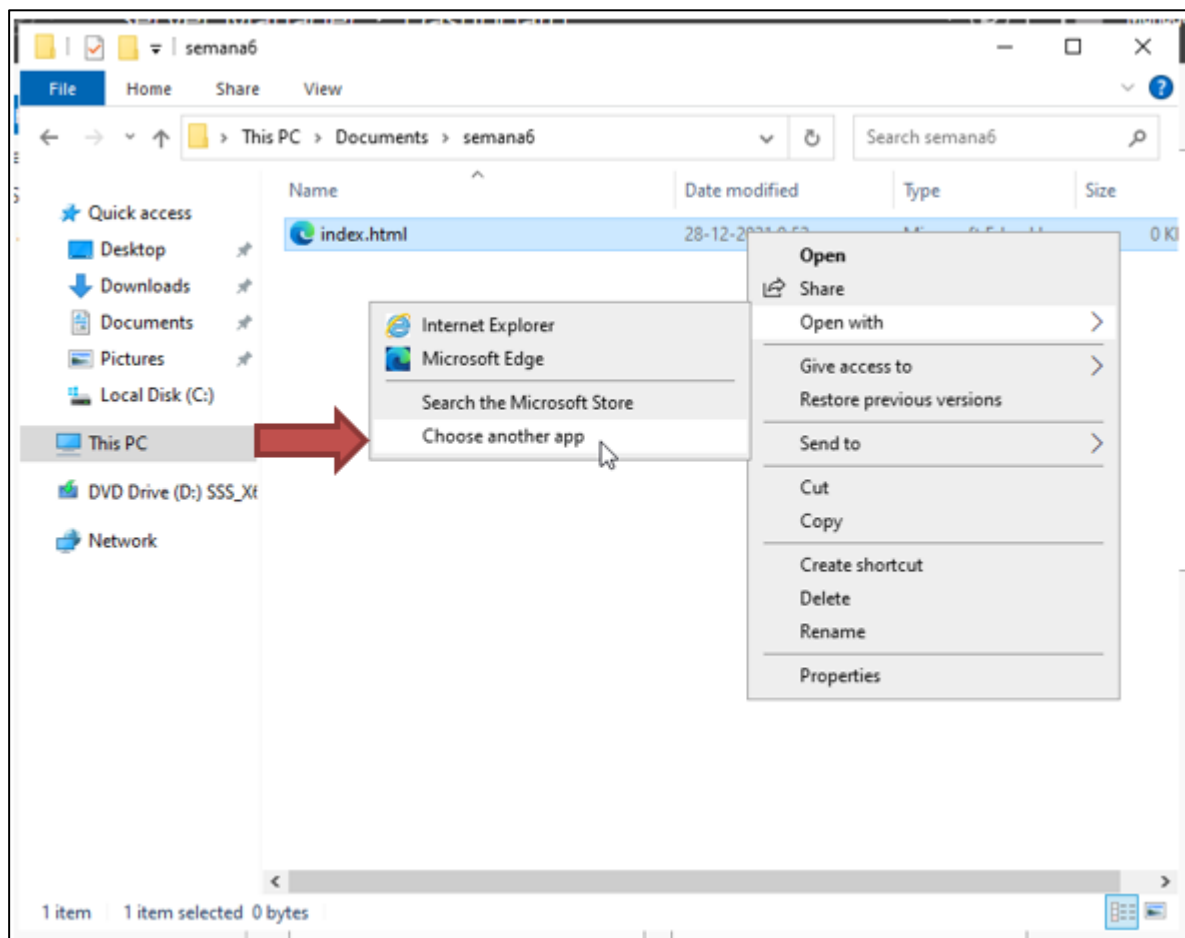
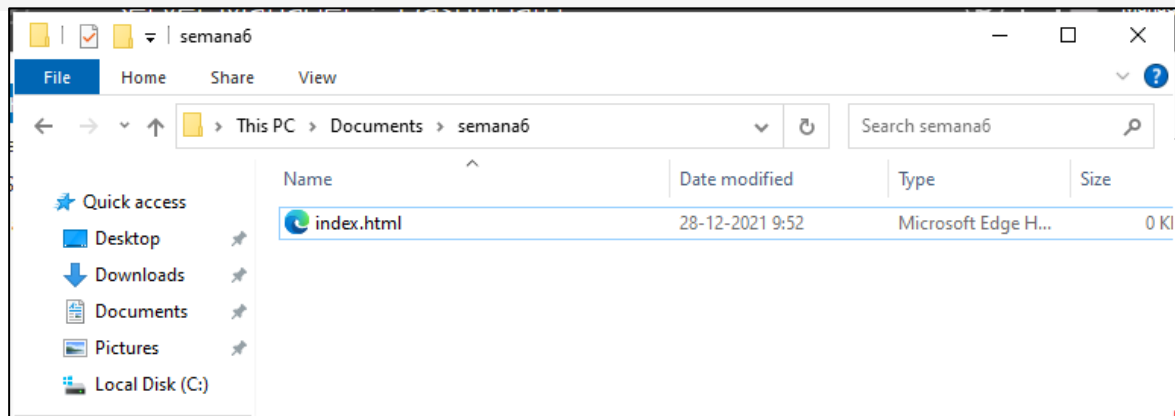


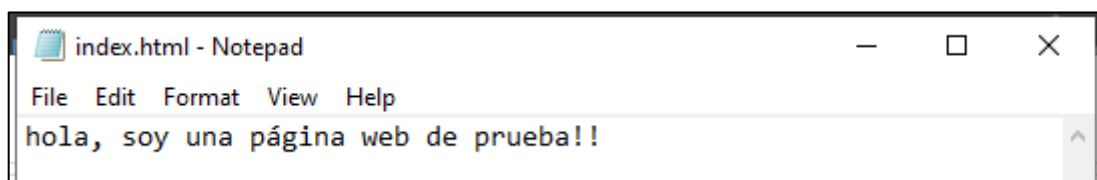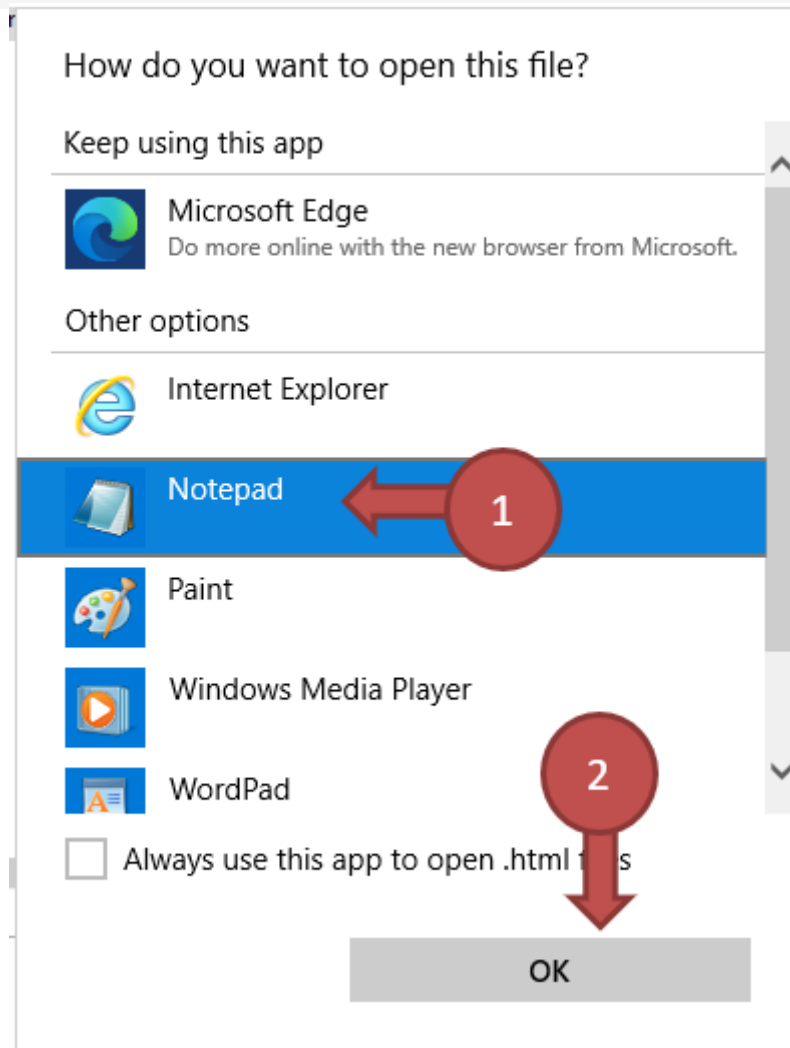


Entrando a IIS

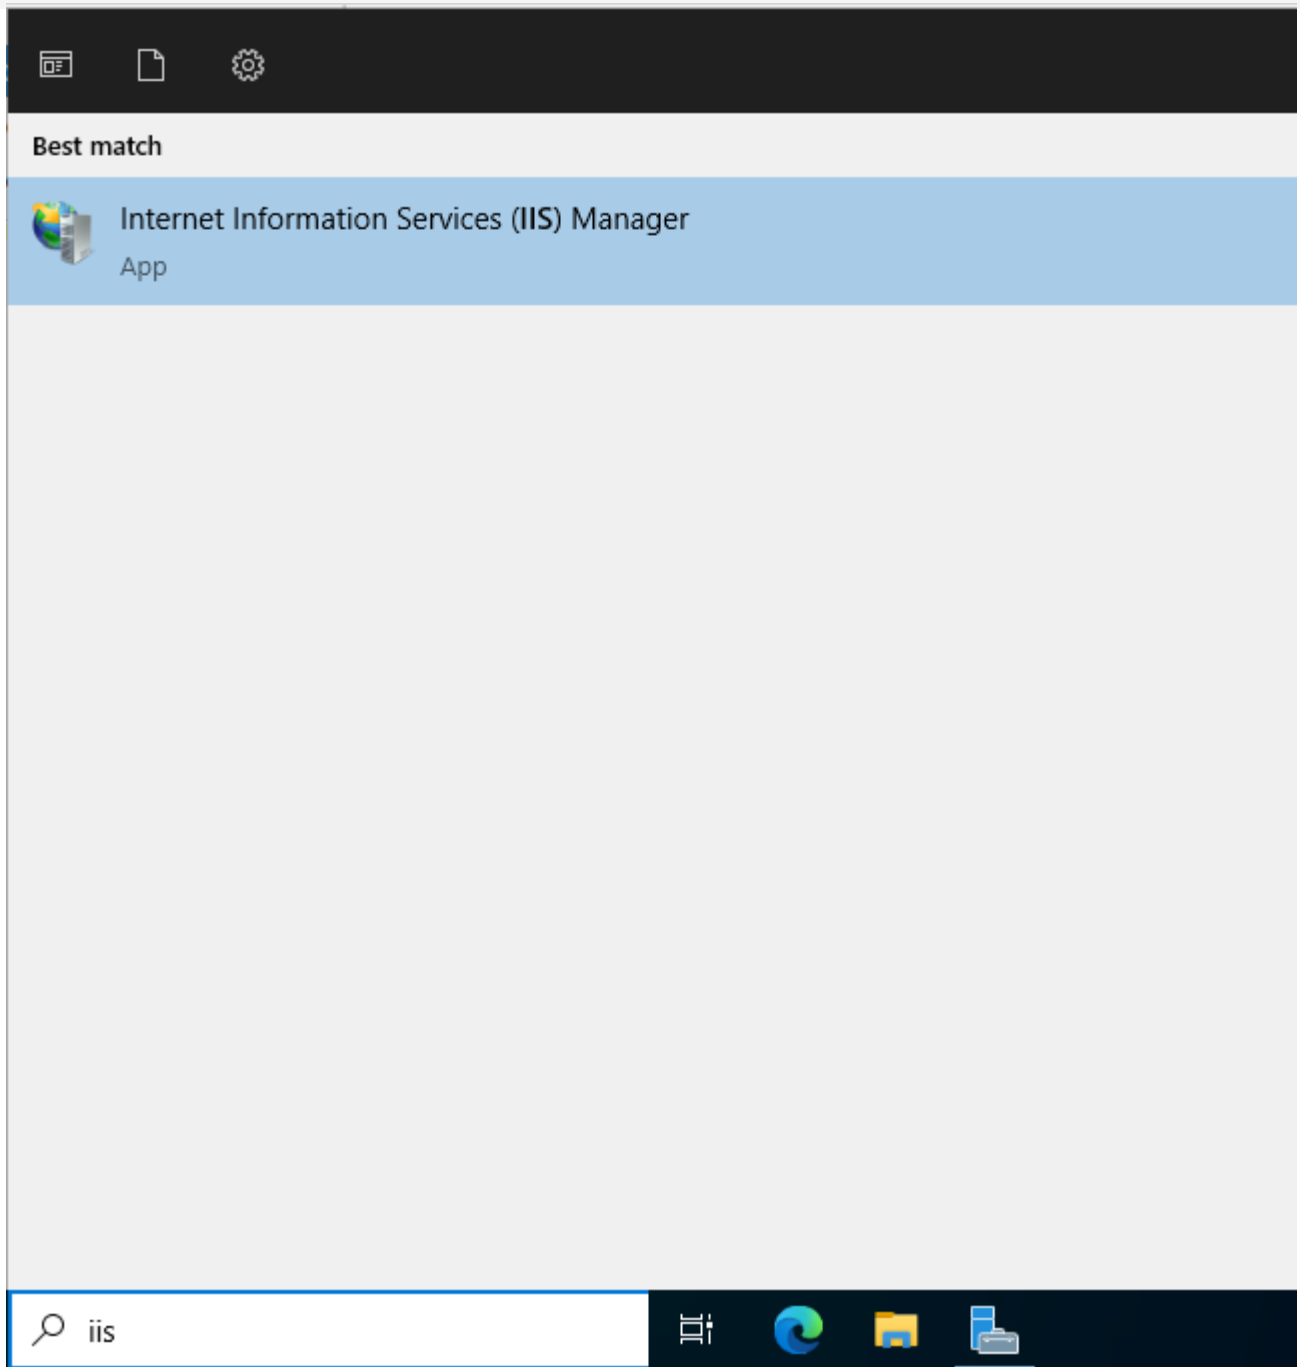

c. Eliminar el sitio por defecto

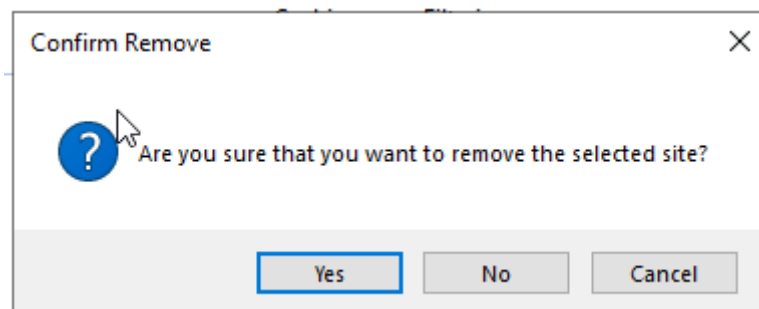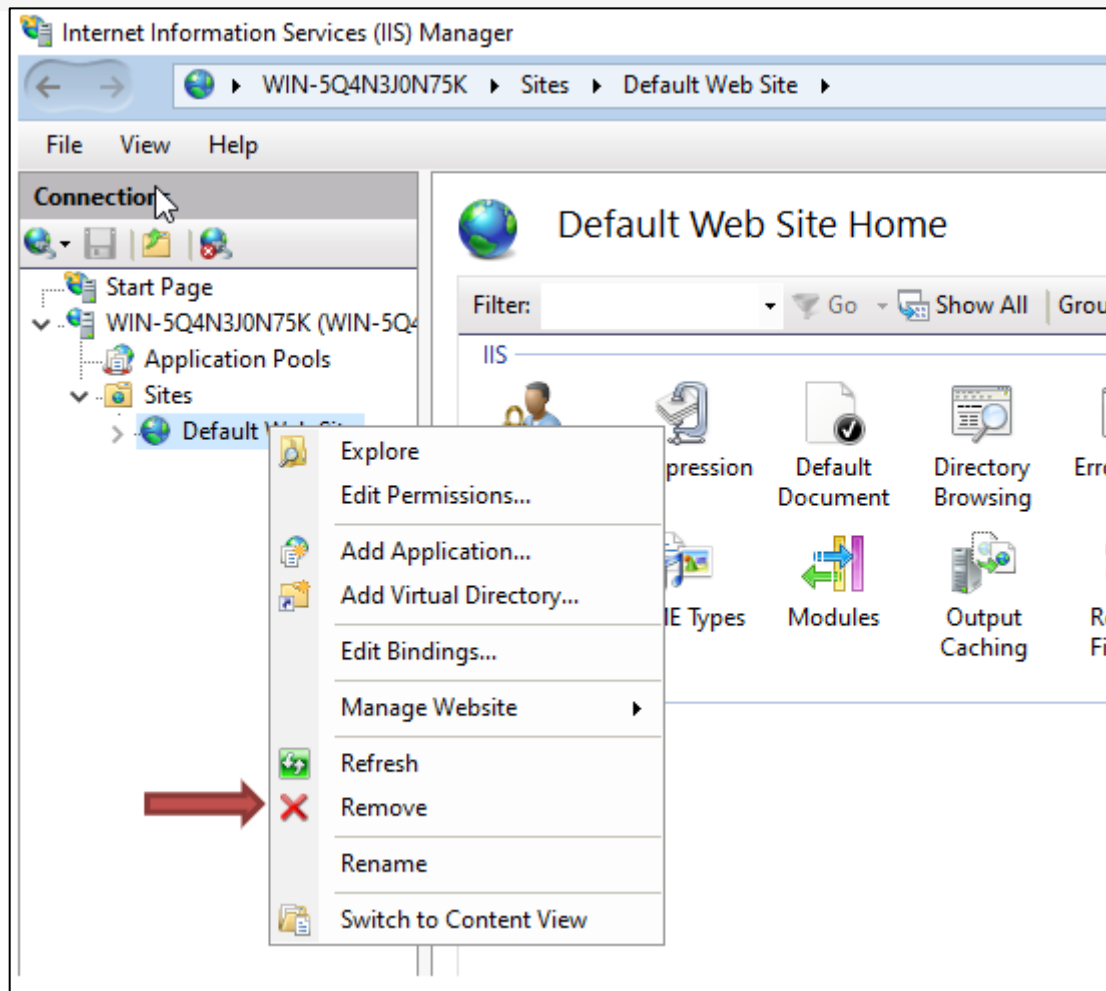

d. Agregar sitio web

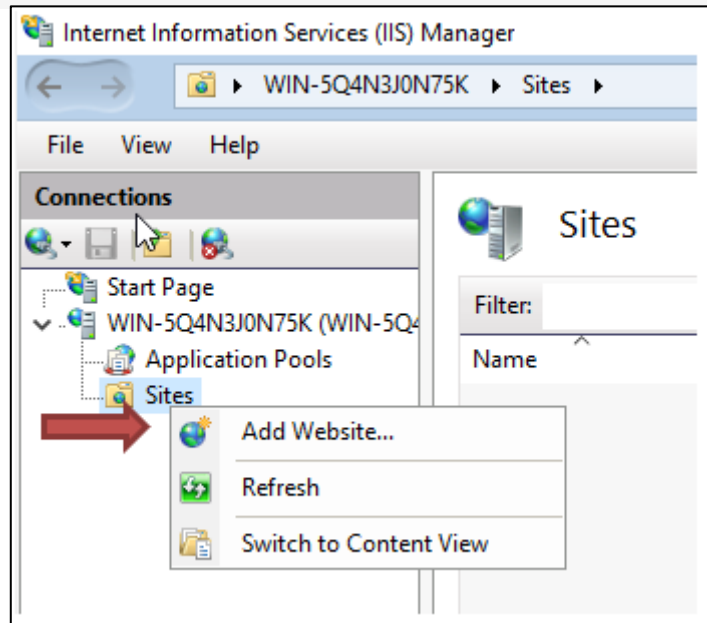

d/e. Nombre del sitio, usuario Administrador y testeo de configuración

Add Website

Site name: Application pool:

Content Directory

Physical path:

Pass-through authentication

Binding

Type:

Host name:

Example:


☒ Start Website immediately

Set Credentials

User name:

Password:

Confirm password:

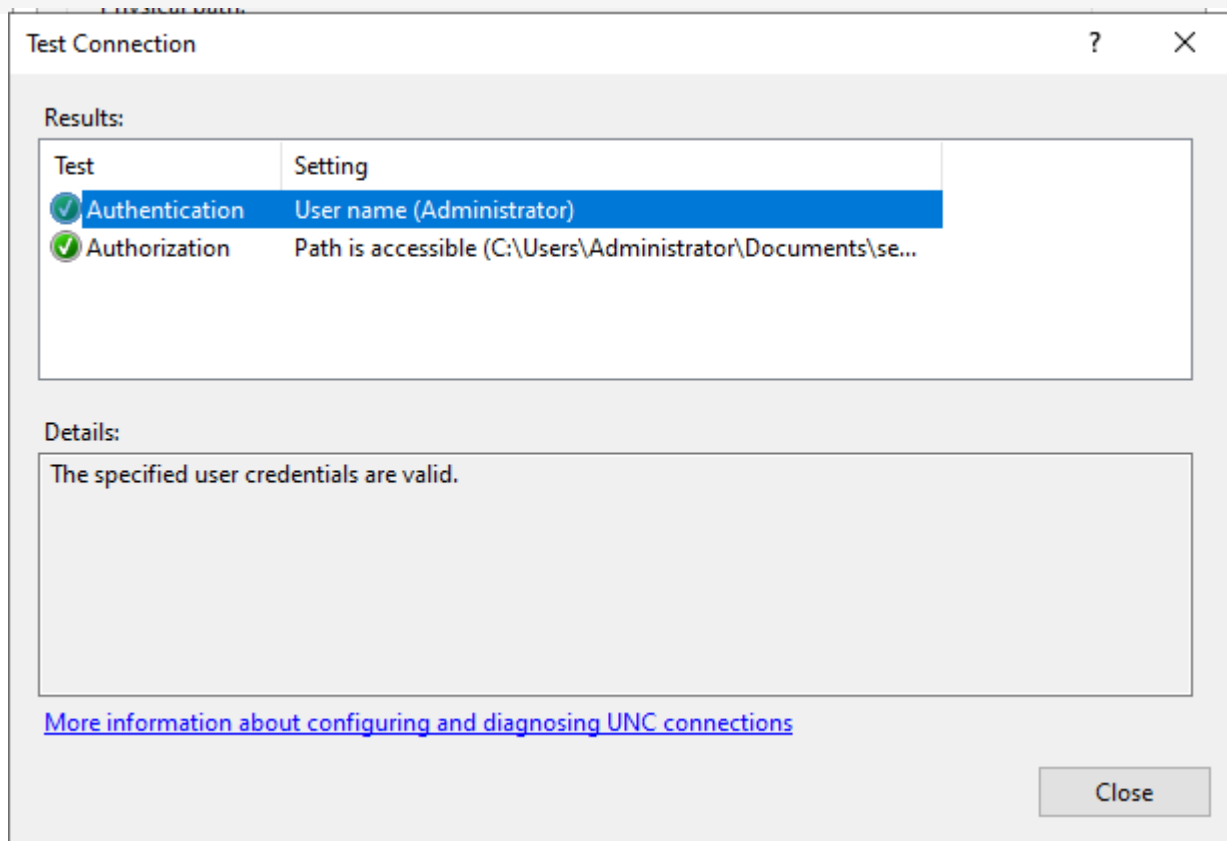

f. Asignar IP al servidor

Add Website ? X

Site name: Application pool:

Content Directory

Physical path:

Connect as 'Administrator'

Binding


Type: IP address: Port:

Host name:

Example: www.contoso.com or marketing.contoso.com

☒ Start Website immediately

e. Probar sitio web

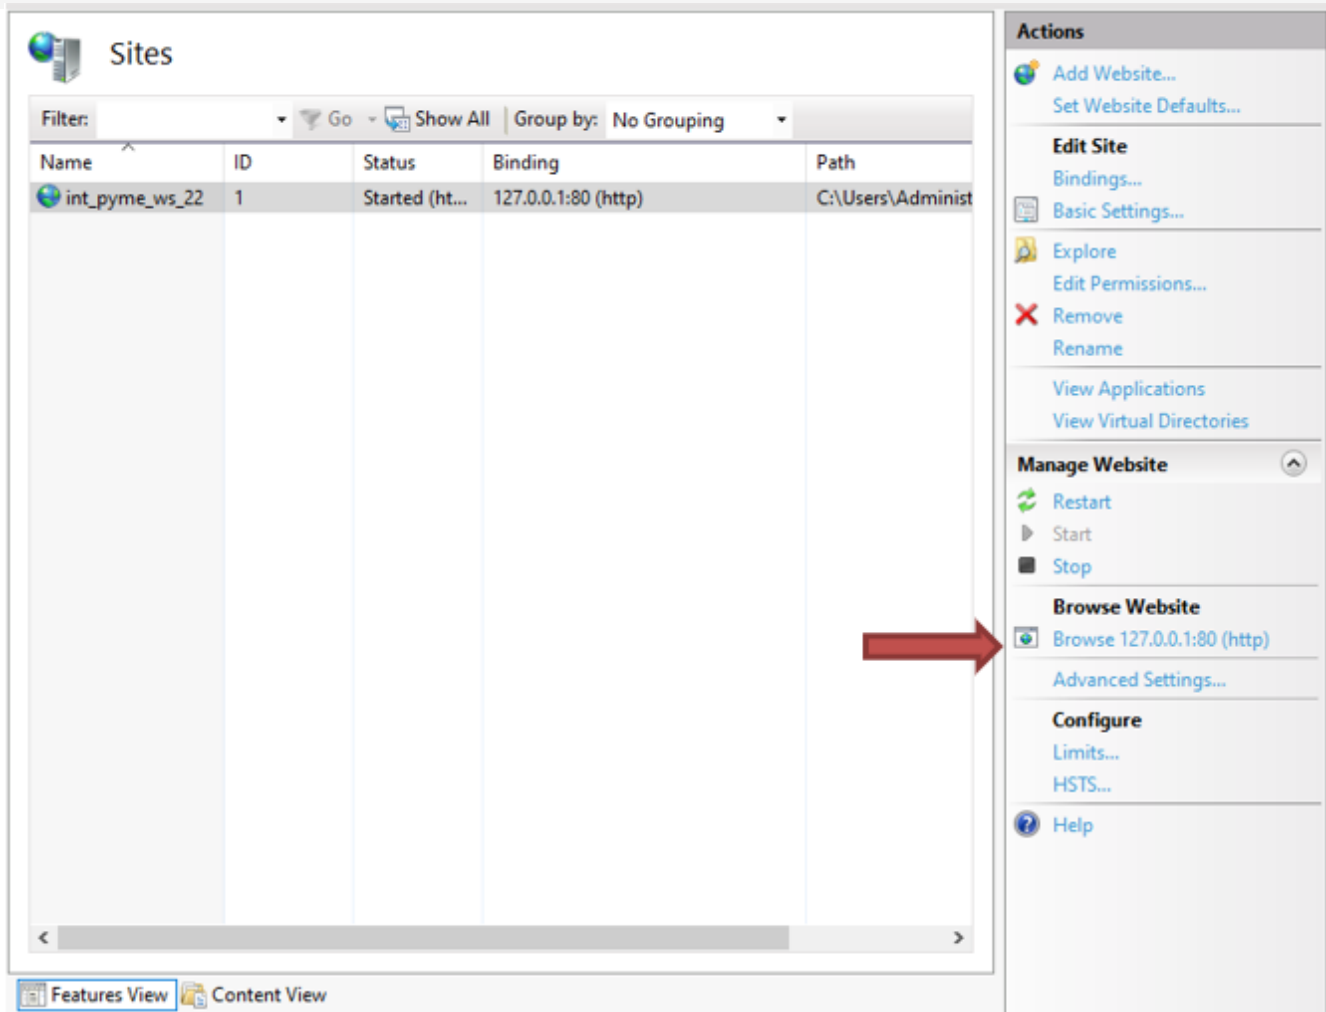

Sites


Filter: Go Show All Group by: No Grouping

Name	ID	Status	Binding	Path
int_pyme_ws_22	1	Started (ht...	127.0.0.1:80 (http)	C:\Users\Administ



Actions

- Add Website...
- Set Website Defaults...
- Edit Site**
 - Bindings...
 - Basic Settings...
- Explore
- Edit Permissions...
- Remove
- Rename
- View Applications
- View Virtual Directories
- Manage Website**
 - Restart
 - Start
 - Stop
 - Browse Website**
 - Browse 127.0.0.1:80 (http)
 - Advanced Settings...
 - Configure**
 - Limits...
 - HSTS...
 - Help

Features View Content View

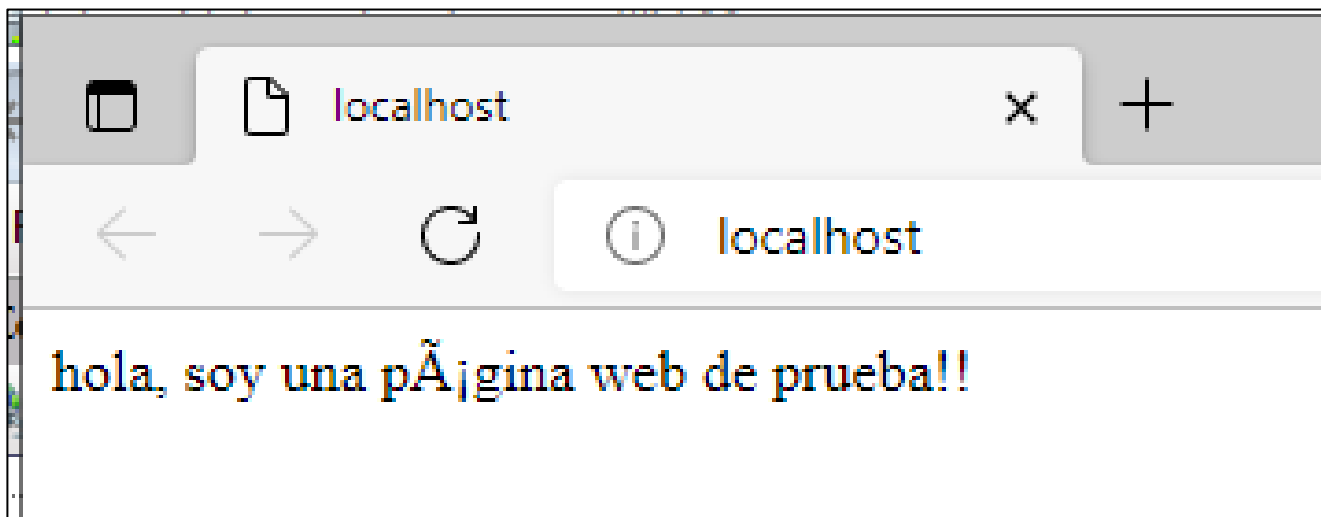

La “á” de página aparece de esa manera, debido a que no está codificada en base a UTF-8. Si no funciona al ingresar, eliminar todos los documentos por defecto de la configuración y dejar solo index.html, y volver a probar.

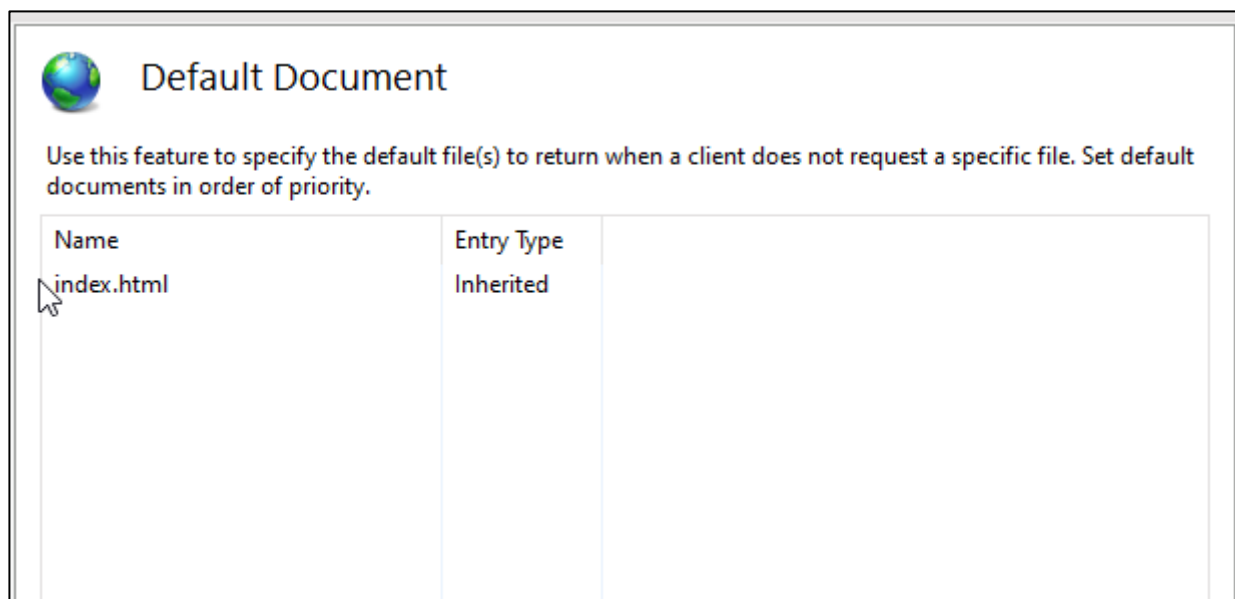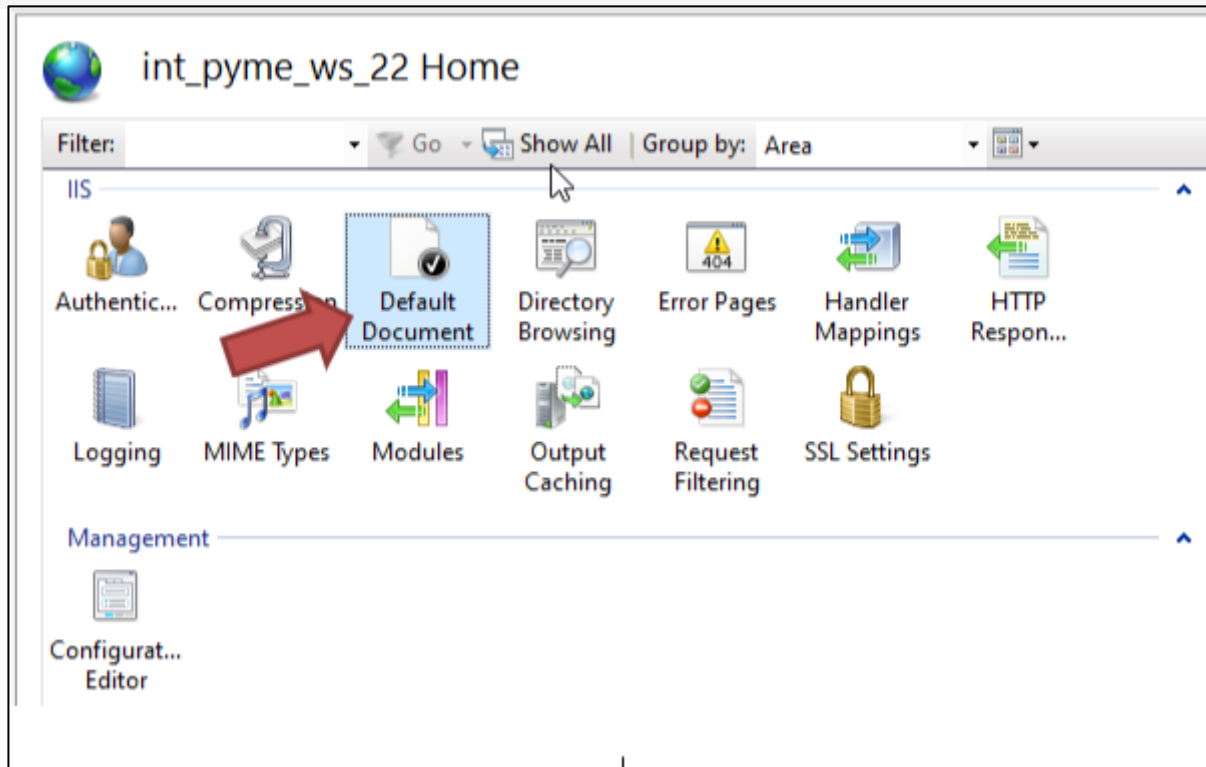

PAUTA DE AUTOEVALUACIÓN:

A continuación, te invitamos a responder una pauta de autoevaluación, para que verifiques lo aprendido en esta actividad y el logro del o los objetivos planteados inicialmente. Recuerda, en caso de presentar dudas, debes participar de forma permanente en los foros, donde el docente te retroalimentará y dará respuesta a tus inquietudes.

Criterios de revisión del informe con la información recopilada:	Completamente logrado (4)	Medianamente logrado (3)	Parcialmente logrado (2)	No logrado (0)
1. Logré responder correctamente las preguntas de selección múltiple				
2. Realicé correctamente las tareas solicitadas en la máquina virtual				
3. Logré configurar correctamente el sitio web de IIS				
4. Finalicé la actividad, comprendiendo cada uno de los ejercicios desarrollados				
5. Logré el objetivo planteado para esta actividad				
Puntaje Total	20 puntos			
Puntaje Obtenido	XX Puntos obtenidos			



4 INSTITUCION
ACREDITADA
NIVEL AVANZADO
AÑOS Hasta octubre 2025



GESTIÓN INSTITUCIONAL Y DOCENCIA DE PREGRADO