


# 1 Emacs CheatSheet

## LANGUAGES

- PDF Link: [cheatsheet-emacs-A4.pdf](#), Category: languages
- Blog URL: <https://cheatsheet.dennyzhang.com/cheatsheet-emacs-A4>

File me Issues or star this repo.

See more CheatSheets from Denny: [#denny-cheatsheets](#)

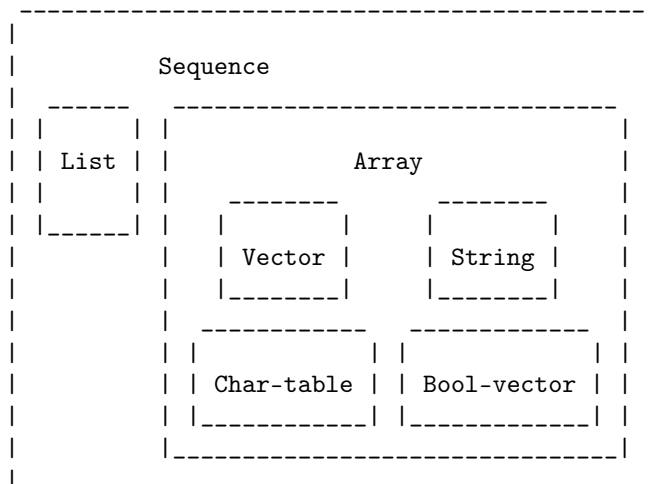

## 1.1 Features

### 1.1.1 View In Emacs

| Name   | Comment                          |
|--|----------------------------------|
| Move forward across one balanced expression  | <code>forward-sexp</code> C-M-f  |
| Move backward across one balanced expression | <code>backward-sexp</code> C-M-b |

### 1.1.2 Org-mode export Latex

| Name                             | Comment  |
|----------------------------------|--|
| Make page size bigger            | <code>#+LATEX_HEADER: \usepackage[margin=0.5in]{geometry}</code> link: stackexchange |
| Change document class            | <code>#+LaTeX_CLASS_OPTIONS: [a4paper]</code> link: stackexchange                    |
| Add the date of today            | <code>#+LATEX_HEADER: \rhead{Updated: \today}</code> link: stackexchange             |
| Add page number with total pages | <code>#+LATEX_HEADER: \rfoot{\thepage\ of \pageref{LastPage}}</code>                 |

### 1.1.3 Buffer Operations

| Name                          | Comment   |
|-------------------------------|---|
| Move to top                   | <code>(goto-char (point-min))</code>                            |
| Replace string by regexp      | <code>buffer-replace.el</code>                                  |
| Delete region                 | <code>(delete-region start-pos end-pos)</code>                  |
| Buffer string with plain text | <code>(buffer-substring-no-properties start-pos end-pos)</code> |
|                               | <code>(get-buffer-create BUFFER-OR-NAME)</code>                 |
|                               | <code>(current-buffer)</code>                                   |
|                               | <code>(set-buffer BUFFER-OR-NAME)</code>                        |
|                               | <code>(kill-buffer)</code>                                      |
|                               | <code>(set-buffer-modified-p nil)</code>                        |

### 1.1.4 GNUS - Mail In Emacs

| Name                         | Comment                                   |
|------------------------------|---|
| Create delayed email         | <code>gnus-delay-article C-c C-j</code>   |
| Save mail's attachment       | <code>gnus-summary-save-parts</code>      |
| Forward mail                 | <code>gnus-summary-mail-forward</code>    |
| Send gnus drafts             | <code>gnus-draft-send-message</code>      |
| Send all the sendable drafts | <code>gnus-draft-send-all-messages</code> |
| Add attachment               | <code>mml-attach-file(C-c C-m f)</code>   |
| Create group                 | <code>gnus-group-make-group (G m)</code>  |

### 1.1.5 Table in Org-mode

```
#+NAME: supplies
| Date          | Category          | Amount |
|-----+-----+-----|
| 2014/01/14 | Supplies          | 43.97 |
| 2014/02/15 | Supplies          | 56.48 |
| 2014/02/11 | Book              | 17.99 |
| 2014/06/10 | Kinesis Keyboard | 289.16 |
| 2014/08/23 | Printer           | 99.96 |
| 2014/08/30 | Supplies          | 58.26 |
| 2014/08/22 | Books             | 18.99 |
| 2014/08/25 | Books             | 7.50 |
| 2014/09/15 | Books             | 21.49 |
| 2014/12/31 | Toner Service     | :=24.95*4 |
|-----+-----+-----|
|              | Total:            |        |
#+TBLFM: @>$3=vsum(@2..@-1);%.2f
```

## 1.2 Data Structures

### 1.2.1 Debug

| Name                       | Comment  |
|----------------------------|--|
| Debug a function           | <code>edebug-defun</code>                          |
| Change function via advice | <code>defadvice ;; Super inspiring feature!</code> |
| Set default value          | <code>(setq-default indent-tabs-mode nil)</code>   |

### 1.2.2 String

| Name  | Comment   |
|---|---|
| string1 contains string2                    | <code>(string-match ".*README.org" buffer-file-truename)</code>   |
| Replace by regexp                           | <code>(setq ret (replace-regexp-in-string "&lt;hr/&gt;" "" ret))</code>   |
| Format string                               | <code>(format "%s/%s" mywordpress-server-url blog-uri)</code>   |
| String replace                              | <code>(replace-string from-string to-string &amp;optional start end)</code>   |
| Replace by regexp                           | <code>(replace-regexp REGEXP TO-STRING &amp;optional DELIMITED START END)</code>  |
| replace-match                               | <code>(while (search-forward-regexp "myRegexPattern" nil t) (replace-match " " t))</code>   |
| The second captured string                  | <code>(match-string 2)</code>   |
| Get the position of the 2nd captured string | <code>(match-beginning 2) (match-end 2)</code>  |
| List matched count                          | <code>(setq myStr (replace-regexp-in-string "myRegex1" "myRep1" myStr)) (count myStr "myRep1")</code>   |
| Grab the start and end positions of a word  | <code>(setq myBoundaries (bounds-of-thing-at-point 'word))</code><br><code>(setq myStr (buffer-substring myStartPos myEndPos))</code><br><code>(setq myStr (buffer-substring-no-properties myStartPos myEndPos))</code> |

### 1.2.3 Regexp

| Name                              | Comment  |
|-----------------------------------|--|
| Regexp In Emacs                   | regexp-string-match.el                                 |
| Change a given string using regex | (replace-regexp-in-string "^ +" "" url)                |
| Search regexp in some string      | (string-match myRegex myStr)                           |
| Get captured match                | (match-string 1 myStr)                                 |
| Escape special characters         | (regexp-quote "^")<br>(regexp-opt '("hello" "world"))= |

### 1.2.4 Integer

| Name                   | Comment                                  |
|------------------------|--|
| String to int          | (string-to-number STRING &optional BASE) |
| Check whether it's int | (integerp 23)                            |
| decimal to hex         | (format "%x" 10)                         |
| hex to decimal         | (format "%d" #xa)                        |

### 1.2.5 Array & List

- Get items from list

| Name                             | Comment             |
|----------------------------------|---------------------|
| Get the first element            | (car mylist)        |
| Get the nth element              | (nth n mylist)      |
| Get the last element             | (car (last mylist)) |
| Get the 2nd to the last elements | (cdr mylist)        |
| Get the nth to the last elements | (nthcdr n mylist)   |
| Similar to (car (car value))     | (caar value)        |
| Similar to (cdr (car value))     | (cdar value)        |
| Return the cdr of the cdr of X.  | (cddr X)            |

- More about list

| Name                           | Comment  |
|--------------------------------|--|
| Create a list                  | (defvar my-list (list "item1, item2"))                     |
| Add item to list               | (add-to-list 'my-list "item3")                             |
| Head of a list                 | (car '(a b c))   |
| Tail of a list                 | (cdr '(a b c))   |
| Loop a list                    | (dolist (item my-list) (message item))                     |
| Concat two lists               | (nconc '("a" "b" "c") '("d" "e" "f")) link                 |
| Return a newly created list    | (list x)   |
| Append x to the head of a list | (cons x mylist)  |
| Append without duplication     | (add-to-list 'auto-mode-alist '("\\.gp\$" . gnuplot-mode)) |
| Add ELEMENT if missing         | (add-to-list LIST-VAR ELEMENT &optional APPEND COMPARE-FN) |

### 1.2.6 Position

| Name                                | Comment  |
|-------------------------------------|--|
| Return character at position        | (char-after (point))   |
| Return character preceding position | (char-before (point))<br>(setq myStr (thing-at-point 'word))<br>(setq myStr (thing-at-point 'symbol))<br>(setq myStr (thing-at-point 'line)) |

- Insert text

| Name          | Comment  |
|---------------|--|
| Insert string | (insert "hello world")<br>(insert-buffer-substring buffer &optional start end)<br>(insert-buffer-substring-no-properties buffer &optional start end)<br>(insert-file-contents myPath)<br>(insert-file-contents-literally filename &optional visit beg end replace) |

- Delete text

| Name | Comment                             |
|------|-------------------------------------|
|      | (delete-char 9)                     |
|      | (delete-region myStartPos myEndPos) |
|      | (erase-buffer)                      |
|      | (upcase obj)                        |
|      | (upcase-word n)                     |
|      | (upcase-region beg end)             |
|      | (upcase-initials obj)               |
|      | (upcase-initials-region beg end)    |
|      | (capitalize obj)                    |
|      | (capitalize-word n)                 |
|      | (capitalize-region beg end)         |
|      | (downcase)                          |
|      | (downcase-word n)                   |
|      | (downcase-region beg end)           |

### 1.2.7 DateTime

| Name                               | Comment   |
|------------------------------------|---|
| Convert time to string             | (format-time-string "<%Y-%m-%d %H:%M UTC +8>" (current-time)) |
| Get current time                   | (current-time)  |
| Add some offset for a time         | (time-add time (seconds-to-time seconds))                     |
| Subtract two time values           | (time-subtract after-init-time before-init-time)              |
| Get second count                   | (float-time (time-subtract after-init-time before-init-time)) |
| Return date as a list (mm/dd/yyyy) | calendar-current-date   |
|                                    | (calendar-extract-month date)                                 |
| m1 will be changed                 | (calendar-increment-month m1 y1 -1)                           |
|                                    | (calendar-date-compare '((12 27 2012)) '((12 26 2012)))       |
|                                    | (calendar-holiday-list)                                       |

### 1.2.8 Hook

| Name                     | Comment   |
|--------------------------|---|
| Add hook                 | (add-hook 'myhook '(lambda () (insert "fun1 was called "))) |
| Run each hook in myhook. | (run-hooks 'myhook)   |

### 1.2.9 Files

| Name   | Comment   |
|--|---|
| Open file                                    | (find-file html-file)   |
| Save file                                    | (write-file html-file nil)  |
| Get short filename                           | (file-name-nondirectory somefilename)                               |
| Get the directory name from filename         | (file-name-directory FILENAME)                                      |
| Check file/directories existence             | (file-exists-p bfilename)   |
| Insert contents of file FILENAME after point | (insert-file-contents somefilename)                                 |
| Return FILENAME's final "extension"          | (file-name-extension "test.erl")                                    |
| Return FILENAME sans final "extension"       | (file-name-sans-extension "test.erl")                               |
| Return a list of names of files in DIRECTORY | (directory-files DIRECTORY &optional FULL MATCH NOSORT)             |
| Insert contents of file FILENAME after point | (insert-file-contents FILENAME &optional VISIT BEG END REPLACE)     |
| Confirm directory exists                     | (file-directory-p FILENAME)   |
| Create directory                             | (make-directory "~/emacs.d/autosaves/" t)                           |
| Find files by name                           | (find-dired "../" "-name defined.hrl")                              |
| read file content into a string              | (setq dddstring (with-temp-buffer (insert-file-contents "dd.txt"))= |

## 1.3 Common Scripts

- emacs multiline regexp

```
;; http://stackoverflow.com/questions/1309050/emacs-query-replace-regexp-multiline
(setq content-str "hello
this
----
Denny
Sophia")
```

```
(message (replace-regexp-in-string
  "\n----\\(\\.\\|\\|\\n\\|\\)*" "" content-str))
```

- cond: like switch or case

link: [WhenToUseIf](#)

```
(let ((x 1))
  (cond ((eq x 0) "It's zero")
        ((eq x 1) "It's one")
        :else "It's something else")
)
```

## 1.4 More Resources

License: Code is licensed under MIT License.