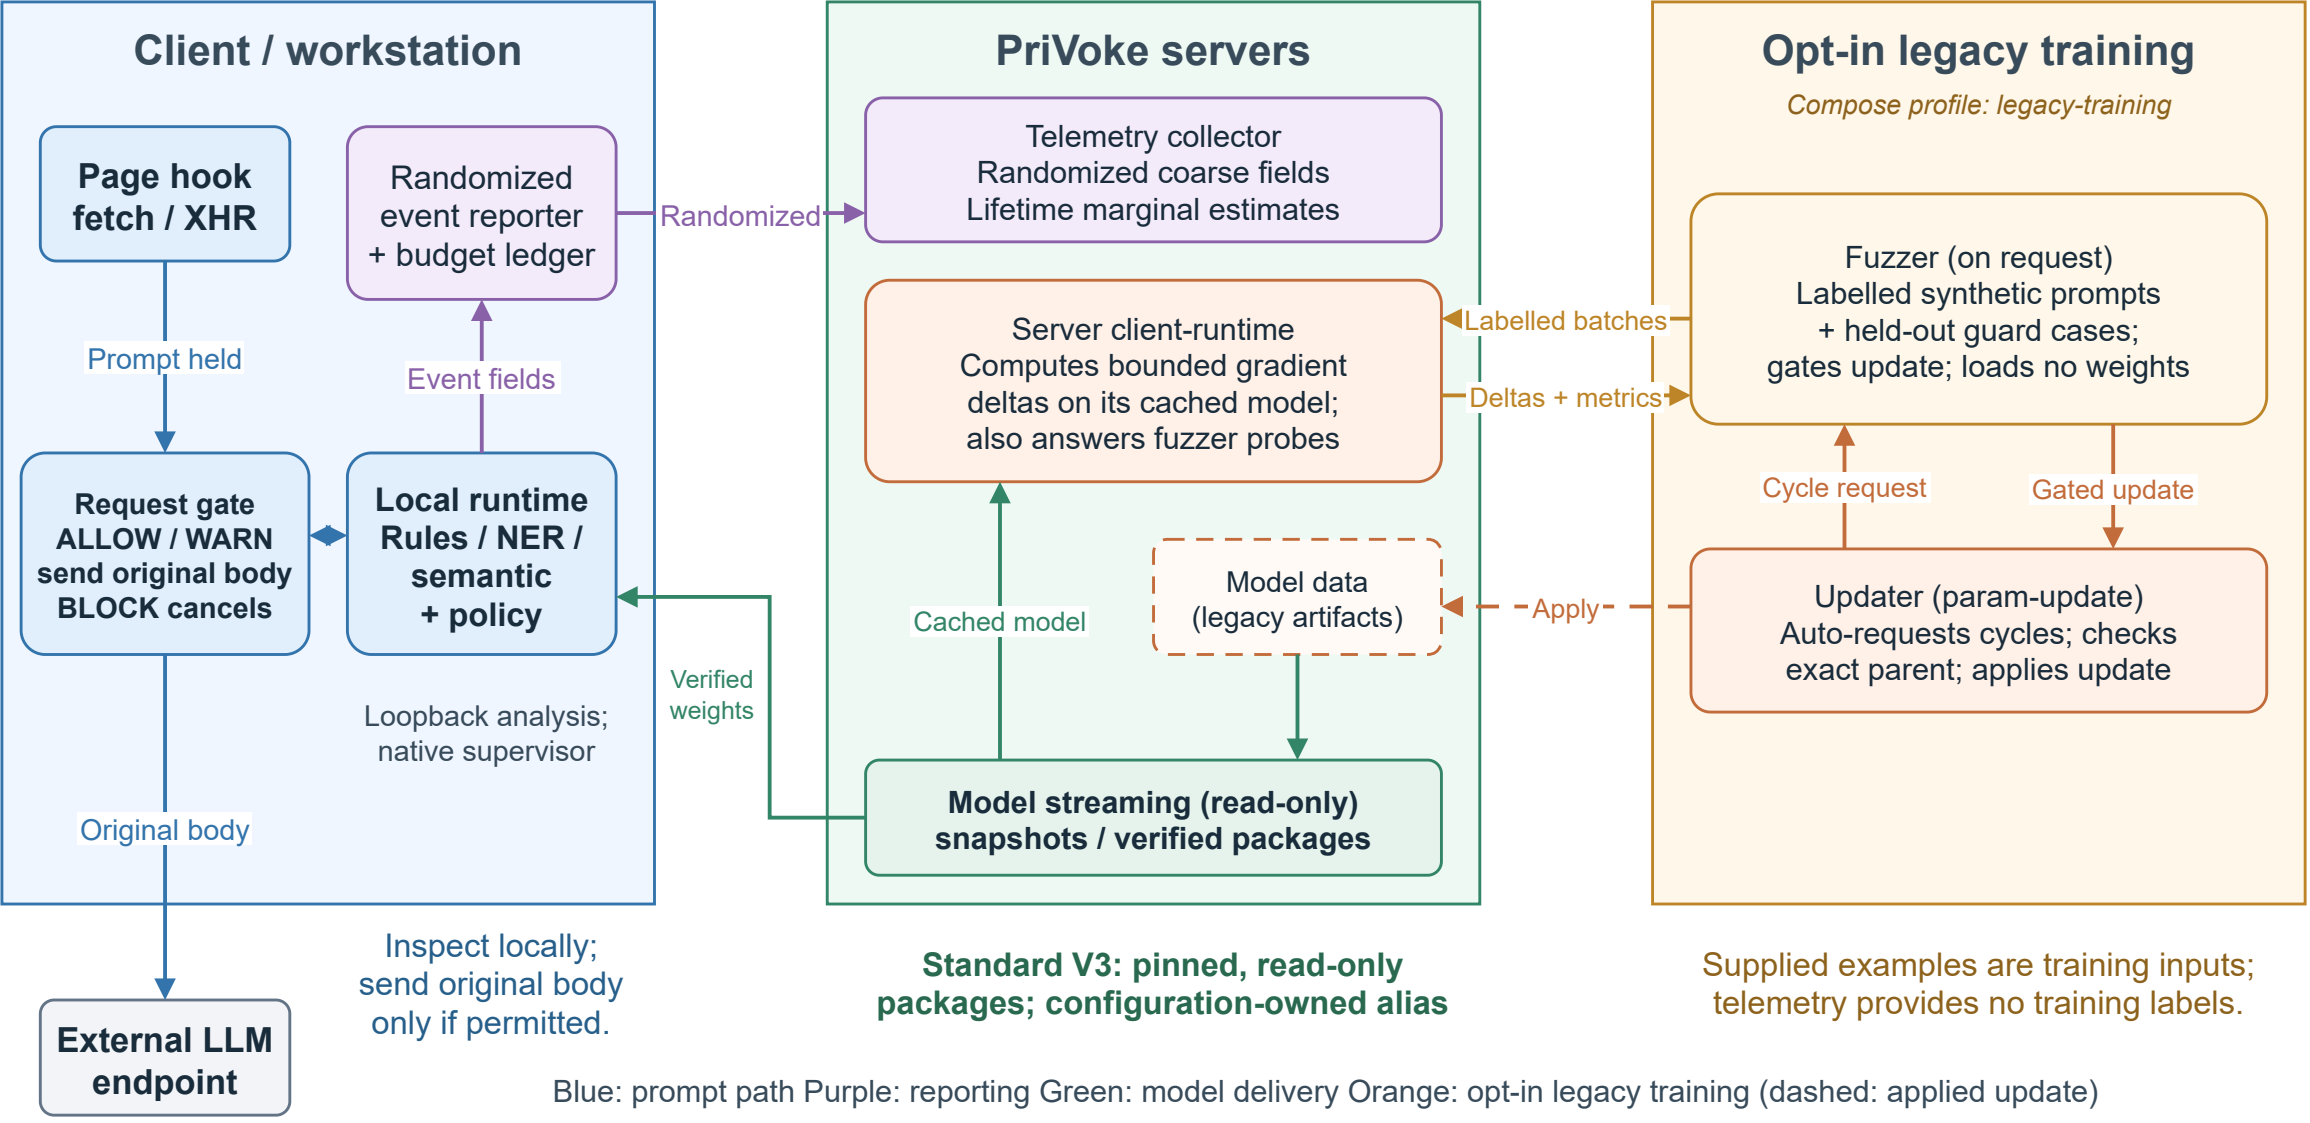

Client / workstation
Page hook fetch / XHR
Randomized event reporter + budget ledger
Randomized
Prompt held
Event fields
Request gate ALLOW / WARN send original body BLOCK cancels
Local runtime Rules / NER / semantic + policy
Loopback analysis; native supervisor
Original body
External LLM endpoint
Inspect locally; send original body only if permitted.
PriVoke servers
Telemetry collector Randomized coarse fields Lifetime marginal estimates
Server client-runtime Computes bounded gradient deltas on its cached model; also answers fuzzer probes
Cached model
Model data (legacy artifacts)
Verified weights
Model streaming (read-only) snapshots / verified packages
Standard V3: pinned, read-only packages; configuration-owned alias
Opt-in legacy training
Compose profile: legacy-training
Labelled batches
Deltas + metrics
Fuzzer (on request) Labelled synthetic prompts + held-out guard cases; gates update; loads no weights
Cycle request
Gated update
Apply
Updater (param-update) Auto-requests cycles; checks exact parent; applies update
Supplied examples are training inputs; telemetry provides no training labels.
Blue: prompt path Purple: reporting Green: model delivery Orange: opt-in legacy training (dashed: applied update)