#132, AECS Layout, IT Park Road, Kundalahalli, Bangalore – 560 037
T:+9180 28524466 / 77

CMR INSTITUTE
OF TECHNOLOGY

Department of MCA

LABORATORY MANUAL

Semester : I

Subject Name : DBMS and Web Technologies Laboratory

Subject Code : MMCL106

Scheme : 2024

INDEX

Sl. No	PARTICULARS	Page. No
1	Create the following tables with properly specifying Primary keys, Foreign keys and solve the following queries. BRANCH (Branchid, Branchname, HOD) STUDENT (USN, Name, Address, Branchid, sem) BOOK (Bookid, Bookname, Authorid, Publisher, Branchid) AUTHOR (Authorid, Authorname, Country, age) BORROW (USN, Bookid, Borrowed_Date) Execute the following Queries: i.List the details of Students who are all studying in 2nd sem MCA. ii.List the students who are not borrowed any books. iii. Display the USN, Student name, Branch_name, Book_name, Author_name, Books_Borrowed_Date of 2nd sem MCA Students who borrowed books. iv. Display the number of books written by each Author. v.Display the student details who borrowed more than two books. vi.Display the student details who borrowed books of more than one Author. vii.Display the Book names in descending order of their names. viii.List the details of students who borrowed the books which are all published by the same publisher.	6
2	Consider the following schema: STUDENT (USN, name, date_of_birth, branch, mark1, mark2, mark3, total, GPA) Execute the following queries: i.Update the column total by adding the columns mark1, mark2, mark3. ii.Find the GPA score of all the students. iii.Find the students who born on a particular year of birth from the date_of_birth column. iv. List the students who are studying in a particular branch of study. v. Find the maximum GPA score of the student branch-wise. vi. Find the students whose name starts with the alphabet “S”. vii. Find the students whose name ends with the alphabets “AR”. viii. Delete the student details whose USN is given as 1001	10
3	Design an ER-diagram for the following scenario, Convert the same into a relational model and then solve the following queries. Consider a Cricket Tournament “ABC CUP” organized by an organization. In the tournament there are many teams are contesting each having a Teamid,Team_Name, City, a coach. Each team is uniquely	12

	identified by using Teamid. A team can have many Players and a captain. Each player is uniquely identified by Playerid, having a Name, and multiple phone numbers,age. A player represents only one team. There are many Stadiums to conduct matches. Each stadium is identified using Stadiumid, having a stadium_name,Address (involves city,area_name,pincode). A team can play many matches. Each match played between the two teams in the scheduled date and time in the predefined Stadium. Each match is identified uniquely by using Matchid. Each match won by any of the one team that also wants to record in the database. For each match man_of_the match award given to a player. Execute the following Queries: i. Display the youngest player (in terms of age) Name, Team name, age in which he belongs of the tournament. ii. List the details of the stadium where the maximum number of matches were played. iii. List the details of the player who is not a captain but got the man_of _match award at least in two matches. iv. Display the Team details who won the maximum matches. v. Display the team name where all its won matches played in the same stadium.	
4	A country wants to conduct an election for the parliament. A country having many constituencies. Each constituency is identified uniquely by Constituency_id, having the Name, belongs to a state,Number_of_voters. A constituency can have many voters. Each voter is uniquely identified by using Voter_id, having the Name, age, address (involves Houseno,city,state,pincode). Each voter belongs to only one constituency. There are many candidates contesting in the election. Each candidates are uniquely identified by using candidate_id, having Name, phone_no, age, state. A candidate belongs to only one party.Thereare many parties. Each party is uniquely identified by using Party_id, having Party_Name,Party_symbol. A candidate can contest from many constituencies under a same party. A party can have many candidates contesting from different constituencies. No constituency having the candidates from the same party. A constituency can have many contesting candidates belongs to different parties. Each voter votes only one candidate of his/her constituencty. Queries: i. List the details of the candidates who are contesting from more than one constituencies which are belongs to different states. ii. Display the state name having maximum number of constituencies. iii. Create a stored procedure to insert the tuple into the voter table by checking the voter age. If voter‟s age is at least 18 years old, then insert the tuple into the voter else display the “Not an eligible voter msg”.	16

	iv. Create a stored procedure to display the number_of_voters in the specified constituency. Where the constituency name is passed as an argument to the stored procedure. v. Create a TRIGGER to UPDATE the count of “ Number_of_voters” of the respective constituency in “CONSTITUENCY” table , AFTER inserting a tuple into the “VOTERS” table.	
5	Design an ER-diagram for the following scenario, Convert the same into a relational model, normalize Relations into a suitable Normal form and then solve the following queries. A country can have many Tourist places . Each Tourist place is identified by using tourist_ place_id, having a name, belongs to a state, Number of kilometers away from the 02.03.2021 updated 52/ 104 capital city of that state, history. There are many Tourists visits tourist places every year. Each tourist is identified uniquely by using Tourist_id, having a Name, age, Country and multiple emailids. A tourist visits many Tourist places, it is also required to record the visted_date in the database. A tourist can visit a Tourist place many times at different dates. A Tourist place can be visited by many tourists either in the same date or at different dates. Queries: i. List the state name which is having maximum number of tourist places. ii. List details of Tourist place where maximum number of tourists visited. iii. List the details of tourists visited all tourist places of the state “KARNATAKA”. iv. Display the details of the tourists visited at least one tourist place of the state, but visited all states tourist places. v. Display the details of the tourist place visited by the tourists of all country.	19

6	Create an XHTML page that provides information about your department. Your XHTML page must use the following tags: a) Text Formatting tags b) Horizontal rule c) Meta element d) Links e) Images f) Tables (Use of additional tags encouraged).	23
7	Develop and demonstrate a XHTML file that includes Javascript script for the following problems: a) Input : A number n obtained using prompt Output : The first n Fibonacci numbers b) Input : A number n obtained using prompt Output : A table of numbers from 1 to n and their squares using alert.	26
8	Develop and demonstrate, using JavaScript script, a XHTML document that contains three short paragraphs of text, stacked on top of each other, with only enough of each showing so that the mouse cursor can be placed over some part of them. When the cursor is placed over the exposed part of any paragraph, it should rise to the top to become completely visible. Modify the above document so that when a text is moved from the top stacking position, it returns to its original position rather than to the bottom	28
9	Considerthefollowingdatabaseofstudentenrollmentincoursesandbooksadoptedfor eachcourse.STUDENT (regno#:string,name:string,major:string,bdate:date) COURSE (course#: int, cname: string, dept: String) TEXT(book_ISBN#:int,book_title:string,publisher:string,author:string) ENROLL (regno#: string, course#: int, sem: int, marks: int) BOOK_ADOPTION (course#: int, sem: int, book_ISBN: int) Create the above tables by properly specifying the primary keys and the foreign keys Enter at least 7 to 10 records to each table. Execute SQL queries for the following requirements: 1) List out the student details, and their course details. The records should be ordered in a semester wise manner. 2) List out the student details under a particular department whose name is ordered in a semester wise 3) List out all the book details under a particular course 4) Find out the Courses in which number of students studying will be more than 2. 5) Find out the Publisher who has published more than 2 books.	31
10	Develop, test and validate an XHTML document that has checkboxes for apple (59 cents each), orange (49 cents each), and banana (39 cents each) along with submit button. Each check boxes should have its own onclick event handler. These handlers must add the cost of their fruit to a total cost. An event handler for the submit button must produce an alert window with the message 'your total cost is $xxx', where xxx is the total cost of the chose fruit, including 5 percent sales tax. This handler must return 'false' (to avoid actual submission of the form data). Modify the document to accept quantity for each item using textboxes.	34

1. **Create the following tables with properly specifying Primary keys, Foreign keys and solve the following queries.**

BRANCH(Branchid,Branchname,HOD)
STUDENT(USN,Name,Address,Branchid,sem)
BOOK(Bookid,Bookname,Authorid,Publisher,Branc hid) AUTHOR(Authorid,Authorname,Country,age)
BORROW(USN,Bookid,Borrowed_Date)

Queries:

1 List the details of Students who are all Studying in 2nd sem MCA.

2 List the students who are not borrowed any books.

3 Display the USN, Student name, Branch_name, Book_name, Author_name , Books_Borrowed_Date of 2nd sem MCA Students who borrowed books. 4 Display the number of books written by each Author.

5 Display the student details who borrowed more than two books.

6 Display the student details who borrowed books of more than one Author.

7 Display the Book names in descending order of their names.

8 List the details of students who borrowed the books which are all published by the same Publisher.

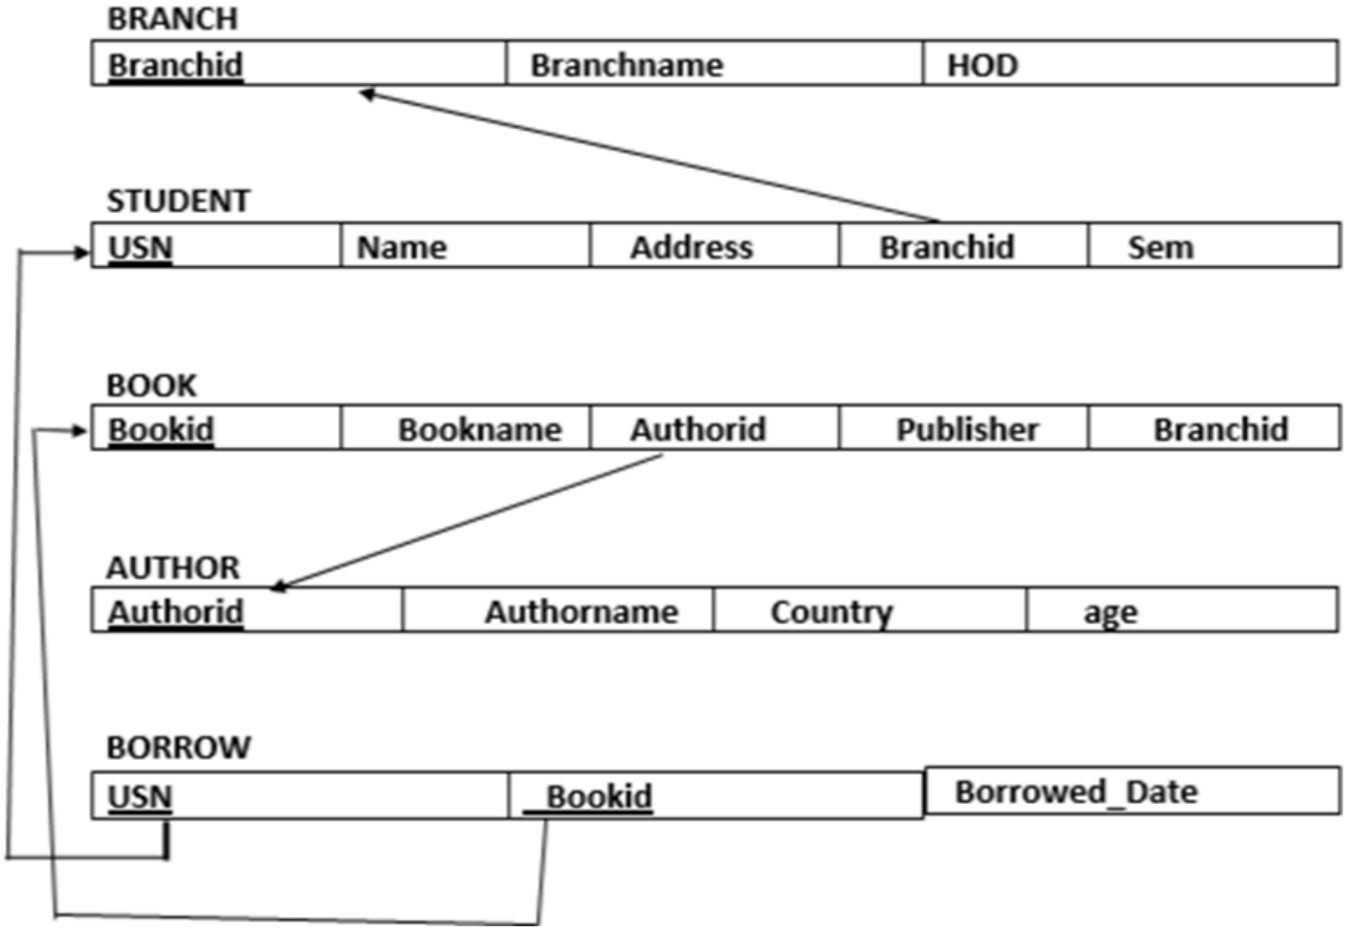

```
create table branch
(branchid int primary key,
bname varchar(10),
hod varchar(10));

create table student
(usn varchar(10) primary key,
name varchar(10),
addr varchar(15),
branchid int references branch(branchid),
sem int);
create table book
(bookid int primary key,
bname varchar(10),
author

create table author
(authorid int primary key,
aname varchar(10),
country  varchar(10),
age int);

create table book
(bookid int primary key,
bname varchar(10),
authorid int references author(authorid),
publisher varchar(10),
branchid int references branch(branchid));
create table borrow
(usn varchar(10) references student(usn),
bookid int references book(bookid),
borrowdate date);

SQL> select * from branch;
 BRANCHID BNAME HOD
---------- ---------- ----------
 1 mca npk
 2 mba bojanna
 3 cse gtr
 4 ise sudhamani
 5 electrical sumathi
```

```
SQL> select * from student;

USN NAME ADDR BRANCHID SEM
---------- ---------- ---------- ---------- ----------
1rn1 harish bangalore 1 2
1rn2 bharath mysore 2 3
1rn3 kiran delhi 3 6
1rn4 mahi chennai 4 7
1rn5 krishna hubli 5 4

SQL> select * from book;
BOOKID BNAME AUTHORID PUBLISHER BRANCHID ---------- -------
1111 c prog 123 pearson 1
2222 dbms 124 mgrawhill 2
3333 oops 125 sapna 3
4444 unix 126 subhash 4
5555 cprog 127 pearson 5
SQL> select * from author;
AUTHORID ANAME COUNTRY AGE
---------- ---------- ---------- ----------
123 navathe india 55
124 ritche uk 44
125 RAMKRISHNA india 55
126 sumitabha india 38
127 dennis usa 66
SQL> select * from borrow;
USN BOOKID BORROWDAT
---------- ---------- ---------
1rn1 2222 10-JAN-00
1rn1 3333 05-MAR-16
1rn3 5555 01-JUN-10
1rn5 2222 19-MAY-00
1rn2 1111 22-FEB-15
```

Query 1.

select * from student where sem=2 and branchid in
(select branchid from branch where bname='mca')

USN NAME ADDR BRANCHID SEM

1rn1 harish bangalore 1 2

Query 2.

select * from student where usn not in (select usn from borrow);

USN NAME ADDR BRANCHID SEM

1rn4 mahi chennai 4 7

Query 3.

select student.usn ,student.name,branch.bname, book.bname, aname, borrowdate from student , branch, book, author, borrow where student.usn=borrow.usn and borrow.bookid=book.bookid and book.authorid =author.authorid and student.branchid=branch.branchid and student.sem=2 and branch.bname='mca';

USN NAME BNAME BNAME ANAME BORROWDAT --- --- --- --- ---

1rn1 harish mca dbms ritche 10-JAN-00 1rn1 harish mca oops RAMKRISHNA 05-MAR-16

Query 4.

select count(*) , authorid from book group by authorid;

COUNT(*) AUTHORID

---

1 123

1 125

1 124

1 126

1 127

Query 5.

select * from student where usn in (select usn from borrow group by usn having count(usn) >=2);

USN NAME ADDR BRANCHID SEM

1rn1 harish bangalore 1 2

Query 6.

select * from student s where exists (select br.usn from borrow br join book bk on br.bookid=bk.bookid where br.usn=s.usn group by usn having count(distinct authorid)>1);

USN NAME ADDR BRANCHID SEM

1rn1 harish bangalore 1 2

Query 7.

select bname from book order by bname desc;

BNAME

unix
oops
dbms
cprog
c prog

Query 8.
select * from student s where exists (select usn , publisher from borrow join book on borrow.bookid=book.bookid where s.usn=borrow.usn group by usn having count(distinct publisher)=1);
USN NAME ADDR BRANCHID SEM .....
1rn2 bharath mysore 2 3
1rn3 kiran delhi 3 6
1rn5 krishna hubli 5 4

2. Consider the following schema: STUDENT (USN, name, date_of_birth, branch, mark1, mark2, mark3, total, GPA) Execute the following queries:

i. Update the column total by adding the columns mark1, mark2, mark3.

ii. Find the GPA score of all the students.
iii. Find the students who born on a particular year of birth from the date_of_birth column.
iv. List the students who are studying in a particular branch of study.
v. Find the maximum GPA score of the student branch-wise.
vi. Find the students whose name starts with the alphabet "S".
vii. Find the students whose name ends with the alphabets "AR".
viii. Delete the student details whose USN is given as 1001.

Query 4:
LIST THE DETAIL OF STUDENT WHO ARE ALL STUDYING IN 2 ND SEM MCA.
mysql> select * from student s,branch b where s.branchid=b.branchid and s.sem=2andbranchname="mca";

Usn	name	Address	branchid	sem	branchid	branchname	hod
11	subhash	Mysore	1	2	1	Mca	a
12	sachin	Mysore	1	2	1	Mca	a

1. LIST THE STUDENT WHO ARE NOT BORROWED ANY BOOKS:
mysql> select * from student s where s.usn not in(select b.usn from borrow b);

Usn	Name	Address	Branched	Sem
12	Sachin	Mysore	1	2
13	Sadique	Mysore	2	3

2. DISPLAY THE USN,STUDENT NAME ,BRANCH_NAME,BOOK_NAME,AUTHORNAME,BOOKS_BORROWED_DATE OF 2ND SEM MCA STUDENT WHO BORROWED BOOKS:

mysql> select s.usn,s.name,b.branchname,bk.bookname,br.borroweddate,a.authorname from student s,branchb,bookbk,authora,borrowbr where s.branchid=b.branchid ands.branchid=bk.branchid and a.authorid=bk.authorid and br.usn=s.usn and bk.bookid=br.bookid and s.sem=2 and b.branchname="mca";

Usn	Name	Branchname	Bookname	Borroweddate	Authorname
11	Subhash	Mca	Unix	2017-02-02	Abhi
11	Subhash	Mca	C++	2017-02-02	Abhi

3. DISPLAY THE NUMBER OF BOOKS WRITTEN BY EACH AUTHOR:

mysql> select a.authorid,a.authorname,count(distinct b.bookid) as cbookid from a uthora,book b where a.authorid=b.authorid group by a.authorid;

Authored	authorname	Cbookid
100	abhi	2
101	mahadev	1

4. DISPLAY THE STUDENT DETAILS WHO BORROWED MORE THAN TWO BOOKS:

mysql> select s.usn,s.name from student s,borrow b where s.usn=b.usn group by s.usn having count(distinct b.bookid)>2;

usn	name
11	subhash

5. DISPLAY THE STUDENTS DETAILS WHO BORROWED MORE THAN ONE AUTHOR:
DISPLAY THE STUDENTS DETAILS WHO BORROWED BOOKS OF SAME AUTHOR:

mysql> select s.usn,s.name,count(distinct bk.authorid) from student s,bookbk,borrowbr where s.usn=br.usn and br.bookid=bk.bookid group by s.usn;

6.2DISPLAY THE STUDENTS DETAILS WHO BORROWED MORE THAN ONE AUTHOR:

mysql> select s.usn,s.name,count(distinct bk.authorid) from student s,bookbk,bo
rrowbr where s.usn=br.usn and br.bookid=bk.bookid group by s.usn having count(distinctbk.authorid)>1;

Usn	name	count(distinct bk.authorid)
11	subhash	2

6. DISPLAY THE BOOK NAMES IN DESCENDING ORDER OF THEIR NAMES:
mysql> select b.bookname from book b order by b.booknamedesc;

bookname
Unix
Java
Java
c++

7. LIST THE DETAILS OF STUDENT WHO BORROWED THE BOOKS WHICH ARE ALL PUBLISHED BY THE SAME AUTHOR:
:SELECT THE STUDENT DETAILS WHO TOOK BOOKS OF SAME PUBLISHER:

mysql> select s.usn,s.name,count(bk.publisher) from student s,book bk,borrow brwheres.usn=br.usn and br.bookid=bk.bookid group by s.usn;

LIST THE DETAILS OF STUDENT WHO BORROWED THE BOOKS WHICH ARE ALL PUBLISHED BY THE SAME AUTHOR:

mysql> select s.usn,s.name,count(bk.publisher) from student s,bookbk,borrowbrwheres.usn=br.usn and br.bookid=bk.bookid group by s.usn having count(bk.publisher)>1;

Usn	name	count(bk.publisher)
11	subhash	4

3. Design an ER-diagram for the following scenario, Convert the same into a relational model and then solve the following queries.

Consider a Cricket Tournament "ABC CUP" organized by an organization. In the tournament there are many teams are contesting each having a Teamid,Team_Name, City, a coach. Each team is uniquely identified by using Teamid. A team can have many Players and a captain. Each player is uniquely identified by Playerid, having a Name, and multiple phone numbers,age. A player represents only one team. There are many Stadiums to conduct matches. Each stadium is identified using Stadiumid, having a stadium_name,Address (involves city,area_name,pincode).A team can play many matches. Each match played between the two teams in the scheduled date and time in the predefined Stadium. Each match is identified uniquely by using Matchid. Each match won by

any of the one team that also wants to record in the database. For each match man_of_the match award given to a player. Queries:

1 Display the youngest player (in terms of age) Name, Team name , age in which he belongs of the tournament.

2 List the details of the stadium where the maximum number of matches were played.

3 List the details of the player who is not a captain but got the man_of _match award at least in two matches.

4 Display the Team details who won the maximum matches.

5 Display the team name where all its won matches played in the same stadium.

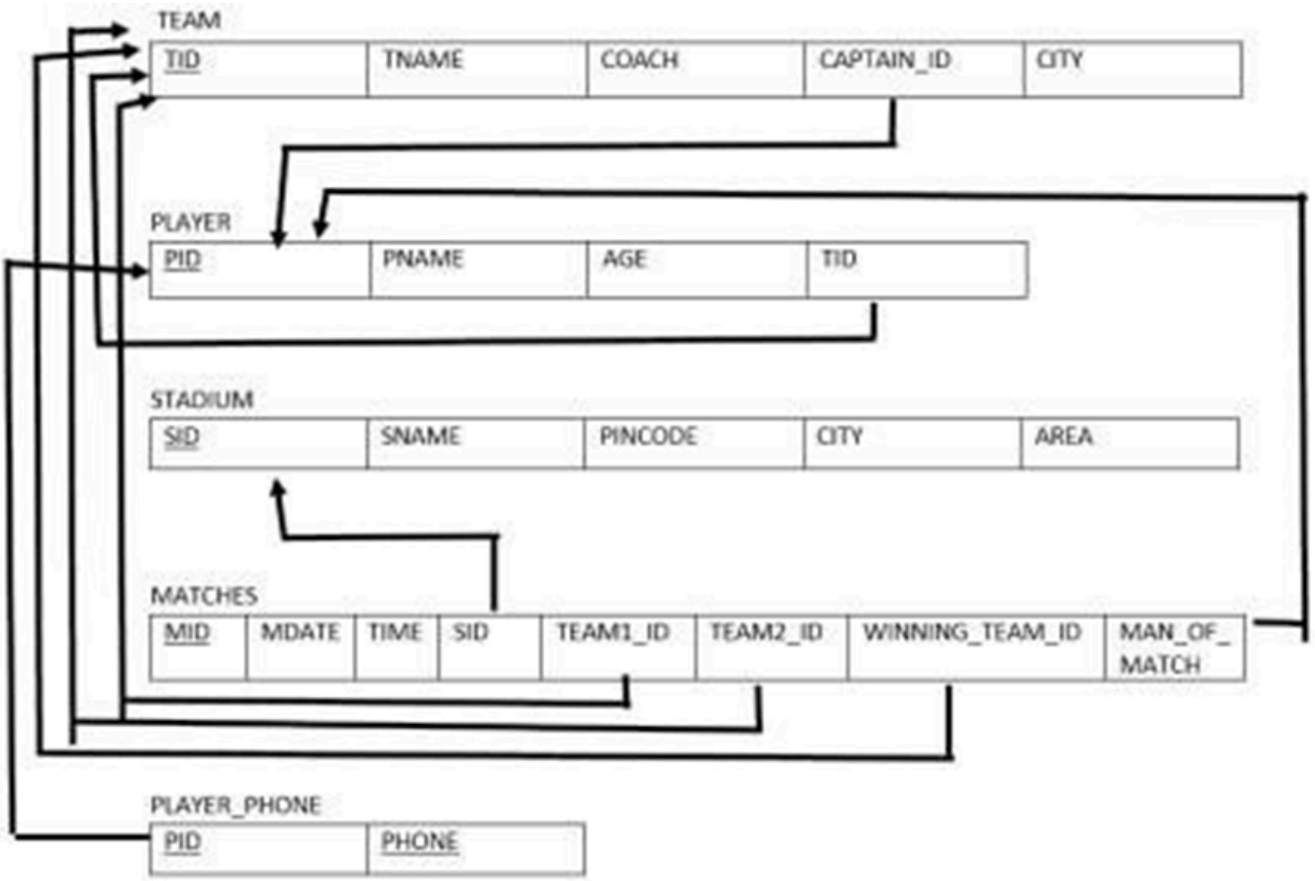

```
create table team
( tid int primary key,
tname  varchar(20),
coach  varchar(20),
captain_pid int,
city   varchar(20));
create table player
( pid int primary key,
pname varchar(2),
age int,
tid int references team(tid))
create table stadium
(sid int primary key,
sname varchar(20),
picode number(8),
city varchar(20),
area varchar(20));
create table match
(mid int primary key,
mdate date,
time varchar(6),
sid int references stadium(sid),
team1_id int references team(tid),
team2_id int references team(tid),
winning_team_id int references team(tid),
```



```
man_of_match int references player(pid))
create table player_phone
( pid int references player(pid),
```

phone int ,
primary key(pid,phone));
SQL> select * from team;
TID TNAME COACH CAPTAIN_PID CITY
---
123 rcb sunil 1 bangalore
124 csk laxman 3 chennai
125 royals singh 4 rajasthan
126 daredevils sehwag 2 delhi
SQL> select * from player;
PID PNAME AGE TID

1 sachin 33 123
2 dravid 32 124
3 dhoni 30 124
4 raina 30 125
5 kohli 23 126
SQL> select * from stadium;
SID SNAME PICODE CITY AREA .....
111 chinnaswamy 56001 bangalore mg road
222 kotla 460009 delhi highway
333 international 38883 chennai tr nagar
444 ksca 560098 bangalore peenya
555 csca 567772 cochin beach road
SQL> select * from match;
MID MDATE TIME SID TEAM1_ID TEAM2_ID WINNING_TEAM_ID MAN_OF_MATCH ----------

1 10-JAN-17 10am 111 123 124 123 1
102 11-JAN-17 pm 222 124 126 126 5
103 12-JAN-17 11am 111 125 126 126 5
104 17-JAN-17 12pm 111 125 123 123 1
SQL> select * from player_phone;
PID PHONE

1 998882928
2 877563733
2 988928822
3 877366383

Query 1 :
Select pname, tname, age from player p, team t where p.tid=t.tid and age =(select min(age) from player);
PNAME TNAME AGE
---
kohli daredevils 23
Query 2:
select * from stadium where sid in
(select sid from match group by sid having count(sid) = (select max(count(sid)) from match group by sid))

```
 SID SNAME PICODE CITY AREA
---------- ---------- ---------- ---------- ----------
  111 chinnaswamy 56001 bangalore mg road
Query 3:
select * from player where pid not in ( select captain_pid from team) and pid in (select man_of_match
from match group by  man_of_match having count(man_of_match)=2);
 PID PNAME AGE TID  ..............................................................
 5 kohli 23 126

Query 4:
select * from team where tid in (select winning_team_id from match group by winning_team_id having
count(winning_team_id)= (select max(count(winning_team_id))from match group by
winning_team_id))
 TID TNAME COACH CAPTAIN_PID CITY
  ..............................................................s.......................
 126 daredevils sehwag 2 delhi
Query 5
 select tname from team where tid in (
select winning_team_id from match group
by(winning_team_id,sid)
 having count(*) in (select count(winning_team_id) from match group by winning_team_id))
TNAME
-------
rcb
```

4. Design an ER-diagram for the following scenario, Convert the same into a relational model, normalize Relations into a suitable Normal form and then solve the following queries. A country can have many Tourist places . Each Tourist place is identified by using tourist_place_id, having a name, belongs to a state, Number of kilometers away from the capital city of that state,history. There are many Tourists visits tourist places every year. Each tourist is identified uniquely by using Tourist_id, having a Name, age, Country and multiple emailids. A tourist visits many Tourist places, it is also required to record the visted_date in the database. A tourist can visit aTourist place many times at different dates. A Tourist place can be visited by many tourists either inthe same date or at different dates.

Queries:

1 List the state name which is having maximum number of tourist places. 2 List details of Tourist place where maximum number of tourists visited. 3 List the details of tourists visited all tourist places of the state "KARNATAKA". 4 Display the details of the tourists visited at least one tourist place of the state, but visited all states tourist places.

5 Display the details of the tourist place visited by the tourists of all country.

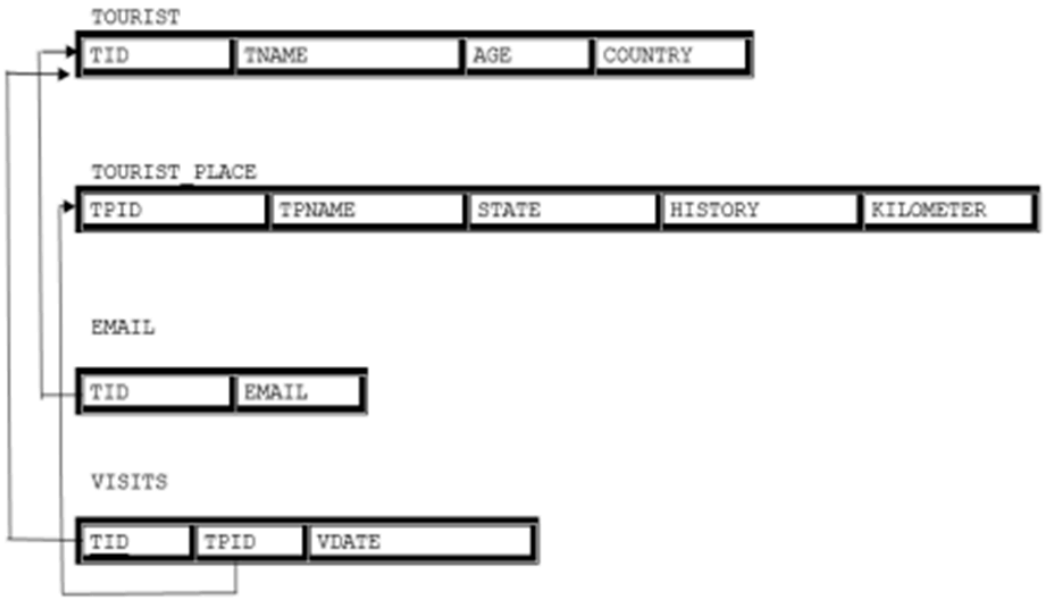


```
create table tourist_place
(tpid number primary key,
history varchar(20),
kilometers number(3)
,state varchar(20),
tpname varchar(20));
create table tourist(tid number primary key,
country varchar(20),
age number,
tname varchar(20));
create table visits
(tpid number(3) references tourist_place(tpid),
tid number references tourist(tid),
vdate date,
primary key(tpid,tid));
create table email
(tid number references tourist(tid),
email varchar(20),primary key(tid,email));
desc tourist_place;
Name Null? Type
---------------------------------------- -------- ----------------------
TPID NOT NULL NUMBER
 HISTORY VARCHAR2(20)
KILOMETERS NUMBER STATE VARCHAR2(20)
TPNAME VARCHAR2(20)
desc tourist;
Name Null? Type
 ---------------------------------------- -------- ----------------------
TID NOT NULL NUMBER
```

```
COUNTRY VARCHAR2(20)
AGE NUMBER TNAME VARCHAR2(20)
desc visits;
Name Null? Type ..............................................................
TPID NOT NULL NUMBER
 TID NOT NULL NUMBER
 VDATE DATE
desc email;
Name Null? Type
 ---------------------------------- -------- ------------------
TID NUMBER
 EMAIL VARCHAR2(20)
SQL> insert into
tourist_place(tpid,history,kilometers,state,tpname)values('11','beauty',' 160','karnataka','ooty');
1 row created.
SQL> select * from tourist_place;
 TPID HISTORY KILOMETERS STATE TPNAME --------- ---------------- --------- ------------ ---------
11 beauty 160 karnataka ooty  12 monuments 270 kerala beluru  13 beach 360 tamilnadu marina
SQL> insert into
tourist(tid,country,age,tname)values('22','india','34','prakash'); 1 row created.
SQL> select * from tourist;
 TID COUNTRY AGE TNAME
..............................................................  22 india 34 prakash
 23 orissa 28 bhanu
 24 india 30 nagesh
SQL> insert into visits values('&tpid','&tid','&vdate'); Enter value for tpid: 12
Enter value for tid: 23
Enter value for vdate: 13-nov-2014
old 1: insert into visits values('&tpid','&tid','&vdate') new 1: insert into visits
values('12','23','13-nov-2014')
1 row created.
SQL> select * from visits;
TPID TID VDATE
---- ---------- ---------
 12 23 13-NOV-14
 11 24 24-JUN-13
 13 22 25-SEP-11
 11 23 23-FEB-10
 13 23 12-JAN-10
 14 24 10-JAN-17
SQL> insert into email values('&tid','&email');
Enter value for tid: 23
Enter value for email: bhanu12@gmail.com
old 1: insert into email values('&tid','&email')
new 1: insert into email values('23','bhanu12@gmail.com') 1 row created.
SQL> select * from email;
 TID EMAIL
---------- -------------------
 23 bhanu12@gmail.com
```

22 prakash242@gmail.com
24 nageshh@gmail.com

Query 1:

```
select state from tourist_place group by state having
count(state)=(select max(count(state)) from tourist_place group by state);
STATE
-------------------
karnataka
```

query 2:

```
select * from tourist_place where tpid in (select tpid from visits group by tpid having count(tpid)=
(select max(count(tpid)) from visits group by  tpid));
 TPID HISTORY KILOMETERS STATE TPNAME

11 beauty 160 karnataka ooty  13 beach 360 tamilnadu marina
```

query 3:

```
 select * from tourist t where t.tid in
(select tid from visits join tourist_place on
visits.tpid=tourist_place.tpid where state='karnataka'
 group by tid having count(state) in (select count(state ) from tourist_place where state='karnataka') );
 TID COUNTRY AGE TNAME

24 india 30 nagesh
```

query 4:

```
select * from tourist t where t.tid in (select tid from visits join tourist_place on
visits.tpid=tourist_place.tpid
 group by tid having count(distinct state)
in (select count(distinct state ) from tourist_place) );
 TID COUNTRY AGE TNAME

23 orissa 28 bhanu
```

query 5:

```
select * from tourist_place where tpid in (
select tpid from visits join tourist on visits.tid=tourist.tid group by tpid having count(distinct country)=
(select count(distinct country) from tourist));
TPID HISTORY KILOMETERS STATE TPNAME

11 beauty 160 karnataka ooty  13 beach 360 tamilnadu marina
```

5. Design an ER-diagram for the following scenario, Convert the same into a relational model, normalize Relations into a suitable Normal form and then solve the following queries. A country wants to conduct an election for the parliament. A country having many constituencies. Each constituency is identified uniquely by Constituency_id, having the Name, belongs to a state, Number_of_voters. A constituency can have many voters. Each voter is uniquely identified by using Voter_id, having the Name, age, address (involves Houseno, city, state, pincode). Each voter belongs to only one constituency. There are many candidates contesting in the election. Each candidates are uniquely identified by using candidate_id, having Name, phone_no, age, state. A candidate belongs to only one party. There are many parties. Each party is uniquely identified by using Party_id, having Party_Name, Party_symbol. A candidate can contest from many constituencies under a same party. A party can have many

candidates contesting from different constituencies. No constituency having the candidates from the same party. A constituency can have many contesting candidates belongs to different parties. Each voter votes only one candidate of his/her constituency.

Queries:

1 List the details of the candidates who are contesting from more than one constituencies which are belongs to different states.

2 Display the state name having maximum number of constituencies.

3 Create a stored procedure to insert the tuple into the voter table by checking the voter age. If voter's age is at least 18 years old, then insert the tuple into the voter else display the "Not an eligible voter msg" .

4 Create a stored procedure to display the number_of_voters in the specified constituency. Where the constituency name is passed as an argument to the stored procedure.

5. Create a TRIGGER to UPDATE the count of " Number_of_voters" of the respectiv constituency in "CONSTITUENCY" table , AFTER inserting a tuple into the "VOTERS" table

```
create table constituency
(cons_id number(20) primary key,
csname varchar(20),
csstate varchar(20),
no_of_voters number(10));
create table party
(pid number(20) primary key,

pname varchar(20),
psymbol varchar(10));
create table candidates
(cand_id number(12) primary key,
phone_no number(10),
age number(2),
state varchar(20),
name varchar(20),
pid int references party(pid));
create table contest
(cons_id number(20) references constituency(cons_id),
cand_id number(12) references candidates(cand_id)
primary key(cons_id,cand_id);
create table voter
(vid number(20) primary key,
vname varchar(20),
vage number(5),
vaddr varchar(20),
cons_id number(20) references constituency(cons_id),
cand_id number(12) references candidates(cand_id));
select * from constituency;
CONS_ID CSNAME CSSTATE NO_OF_VOTERS
-------- -------------------- -------------------- ------------
111 rajajinagar karnataka 4 222 ramnagar kerala 1
select * from party;
```

PID PNAME PSYMBOL
---- ---------- ----------
876 bjp lotus
877 congress hand
select * from candidates;
CAND_ID PHONE_NO AGE STATE NAME PID -------- ---------- ---------- ---------- -------- ---------
121 9538904626 23 kerala raksha 876 122 9740777502 24 karnataka veena 877
select * from contest;
CONS_ID CAND_ID
--------- ----------
111 122

222 121
222 122
select * from voter;
VID VNAME VAGE VADDR CONS_ID CAND_ID ----- ---------- ---------- ---------- ----------
---------- 345 prashanth 21 kanakpura 222 122 346 prakash 23 ramnagar 111 121
348 nagesh 30 mandya 111 121 349 nagesh 30 mandya 111 121

Query 1:
select * from candidates where cand_id in (select cand_id from contest join constituency on contest.cons_id=constituency.cons_id group by cand_id having count(distinct(csstate))>1);
CAND_ID PHONE_NO AGE STATE NAME PID ------- ---------- ---------- ---------- ---------- --------
122 9740777502 24 karnataka veena 877

Query 2:

```
select csstate from constituency group by csstate having count(csstate) in (select max(count(csstate))
from constituency group by csstate);
CSSTATE
-------------------
karnataka
```

query 3:

```
create or replace procedure agechecking ( id in number,age in number)
 as
 BEGIN
 if age>18 then
 insert into voter(vid,vage) values (id,age);
 else
 dbms_output.put_line('age should be high');
 end if;
 end agechecking;
 /
Procedure created.
SQL> set serveroutput  on;
SQL> exec agechecking (25,21);
PL/SQL procedure successfully completed. // row inserted
SQL> exec agechecking (20,15);
age should be high //Message displayed as age is less than or equal to 18 PL/SQL procedure
successfully completed.
```

query 4:

```
 create or replace procedure display_count
 (
 const_id in number
 )
 as
 vid constituency.cons_id % type;
 begin
 select no_of_voters into vid from constituency where cons_id = const_id and rownum = 1;
 dbms_output.put_line ( 'total voters are: ' || vid);
end;
/
Procedure created.
SQL> select * from constituency;
 CONS_ID CSNAME CSSTATE NO_OF_VOTERS--------- ------------------ ------------------ ------------
111 rajajinagar karnataka 2 222 ramnagar kerala 1
SQL> exec display_count(111);
total voters are: 2
```

Query 5:

```
 create or replace trigger count
 after insert on voter
 for each row
 begin
```

```
update constituency
set no_of_voters = no_of_voters + 1
where cons_id=:new.cons_id;
end count;
/
Trigger created.
SQL> set serveroutput on;
SQL> select * from constituency;

 CONS_ID CSNAME CSSTATE NO_OF_VOTERS
--------- ------------------- ------------------- ------------
 111 rajajinagar karnataka 2  222 ramnagar kerala 1
SQL> insert into voter values(348,'nagesh',30,'mandya',111,121); 1 row created.
After insertion into voter table , the constituency table is automatically updated.
SQL> select * from constituency;
 CONS_ID CSNAME CSSTATE NO_OF_VOTERS
 --------- ------------------- ------------------- ------------
 111 rajajinagar karnataka 3  222 ramnagar kerala 1
```

6. Create an XHTML page that provides information about your department. Your XHTML page must use the following tags:
a) Text Formatting tags
b) Horizontal rule
c) Meta element
d) Links
e) Images
f) Tables

home.html

```
<?xml version = "1.0" encoding = "utf-8"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.1//EN"
"http://www.w3.org/TR/xhtml11/DTD/xhtml11.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
	<head>
		<title>MCA Department</title>
	</head>
	<body bgcolor="AliceBlue">
		<h1 align="center"> CMR INSTITUTE OF TECHOLOGY</h1>
		<h2 align="center"> MCA DEPARTMENT</h2>
		<p>
			<a href="#1">Overview</a>   
			<a href="#2">Faculty</a>    
			<a href="#3">Time Table</a>    
			<a href="contact.xhtml">Contact</a>    
		</p><br/>
		<img src="2.jpg"  alt="image" width="100%" height="300px"/><br/>

		<h3 id="1" style="color: maroon;">Department Overview</h3>
		<p> The Department of MCA was established in 2001.
```

```
                    The Department offers a postgraduate degree titled ‘Master of Computer
Applications’
                    The programme is of 3 years (6 semesters) duration. The current student intake
for the programme                    is 120.</p><br/>
            <hr/><br/>
            <h3 id="2">Faculty</h3>
            <pre>

                    Ms.Gomathi | Head of Department          Ms. Moumita Roy | Assistant
Professor           Ms. Daya Thummar | Assistant Professor

                    Ms. Dhivya R | Assistant Professor          Ms. Pooja S| Assistant Professor
            Ms. Aswini Patil | Assistant Professor

            </pre><br/>
            <hr/><br/>
            <h3 id="3">Time Table</h3>
            <table border="1" cellspacing="5" cellpadding="5">
                    <tr>
                    <td></td>
                    <td>8-9</td>
                    <td>9-10</td>
                    <td>10-10:30</td>
                    <td>10.30-11.30</td>
                    <td>11.30-12:30</td>
                    <td>12:30-1:30</td>
                    <td>1:30-2:30</td>
                    <td>2:30-3:30</td>
                    </tr>
                    <tr>
                            <td>Day 1</td>
                            <td>web</td>
                            <td>unix</td>
                            <td rowspan="3">Break</td>
                            <td>dms</td>
                            <td>co</td>
                            <td rowspan="3">Break</td>
                            <td>ds</td>
                            <td>unix</td>
                    </tr>
                    <tr>
                            <td>Day 2</td>
                            <td>web</td>
                            <td>unix</td>

                            <td>dms</td>
                            <td>co</td>

                            <td>ds</td>
                            <td>unix</td>
                    </tr>
                    <tr>
                    <td>Day 3</td>
                            <td>web</td>
```

```
                        <td>unix</td>

                        <td>dms</td>
                        <td>co</td>

                        <td>ds</td>
                        <td>unix</td>
                    </tr>
                </table>
        </body>
</html>
```

Contact.html

```
<?xml version = "1.0" encoding = "utf-8"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.1//EN"
"http://www.w3.org/TR/xhtml11/DTD/xhtml11.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
        <head>
                <title>MCA Department</title>
        </head>
        <body bgcolor="AliceBlue">
                <h1 align="center"> CMR INSTITUTE OF TECHOLOGY</h1>
                <h2 align="center"> MCA DEPARTMENT</h2>
                <p>
                        <a href="home.xhtml">Home</a>

                </p><hr/>
                <center><p>
                <strong>Address</strong>
                CMR Institute of Technology<br/>
                132 AECS Layout<br/>
                ITPL Main Road<br/>
                Kundalahalli<br/>
                Bangalore 560037, India<br/>
                </p>
                <p>

                <strong>Call:</strong>
                +91 80 28524466 / 77

                <strong>Email:</strong>
                info@cmrit.ac.in

                </p>
                <p>
                <strong>Office hours:</strong>
                8.00 am to 4.00 pm (Monday – Friday)<br/>
                8.00 am to 12.30 pm (Saturday)
```

```
            </p>
            </center>
        </body>
</html>
```

Output

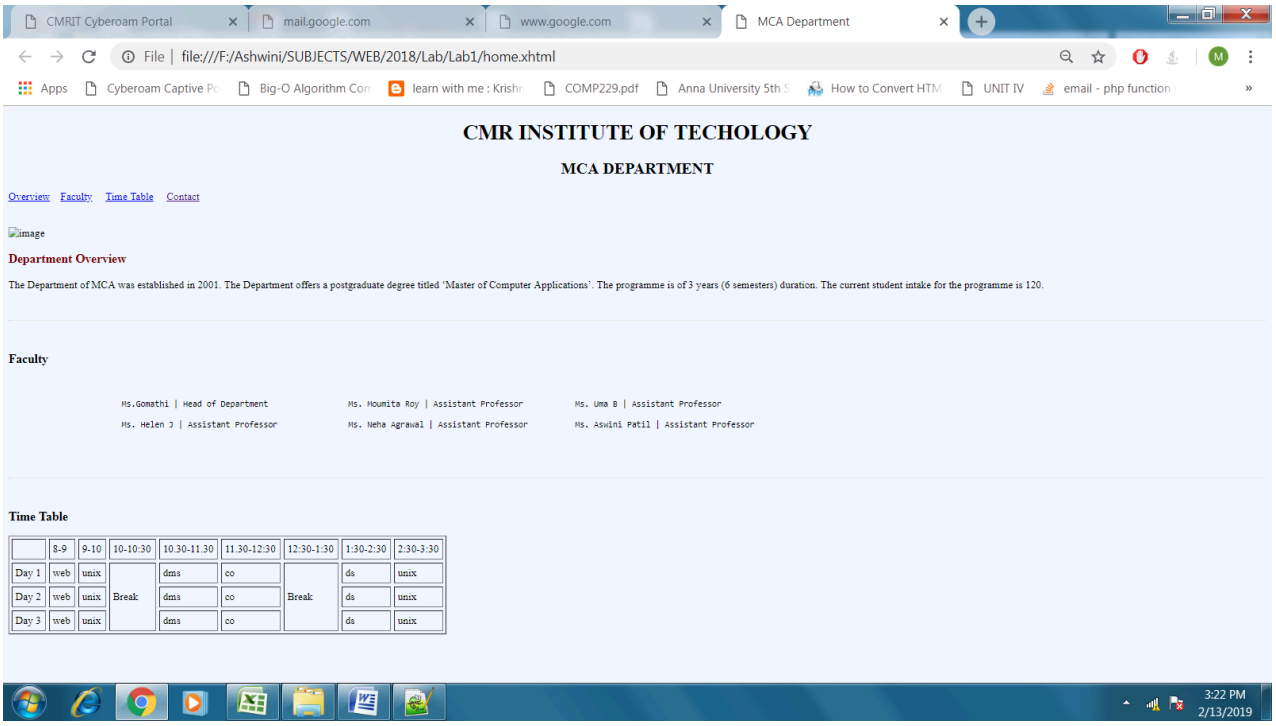

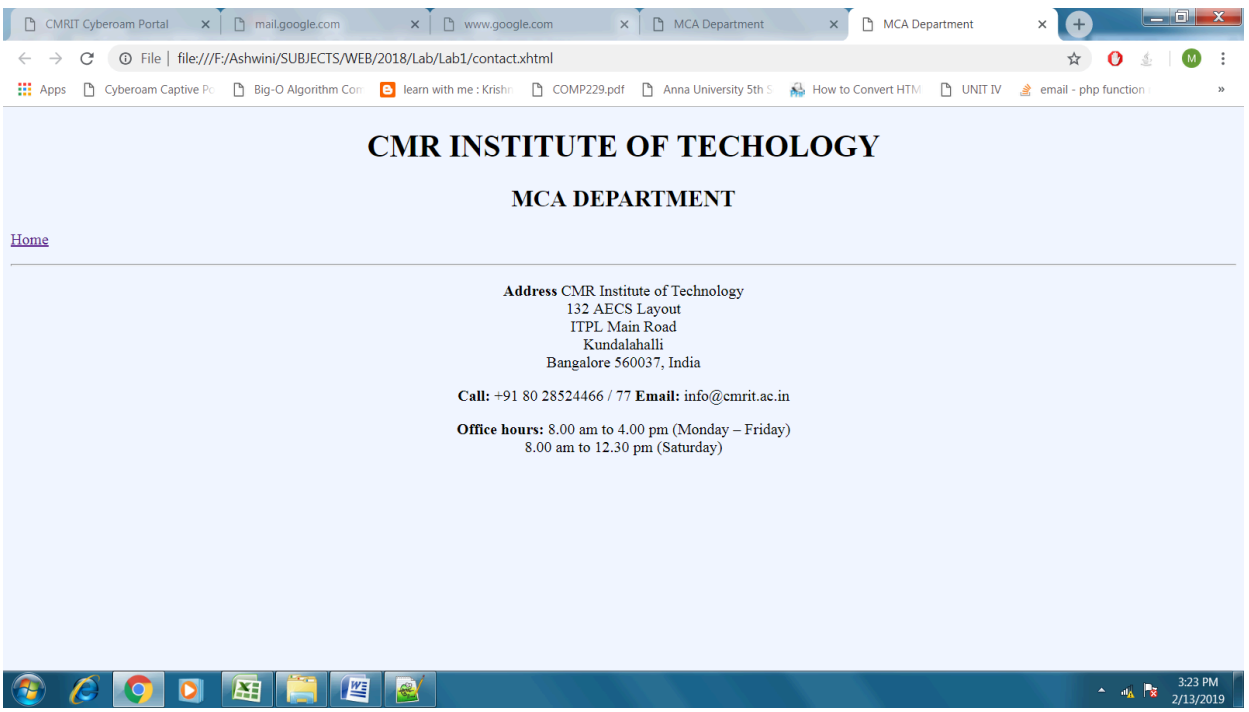

7. Develop and demonstrate a XHTML file that includes Javascript script for the following problems:
a) Input : A number n obtained using prompt Output : The first n Fibonacci numbers
b) Input : A number n obtained using prompt Output : A table of numbers from 1 to n and their squares using alert

Lab3a.html

```
<html lang="en">
        <head>
                <meta charset="UTF-8">
                <title>Lab3a</title>
        </head>
  <body>
    <script type="text/javascript">
      //initialize variables
      var fib1=0,fib2=1,fib=0;
      var n=prompt("Enter a number");
      if(n!=null && n>0)
        {
          document.write("<h1>First " + n + " Fibonacci numbers are: </h1><br>");
          //if input is one number
          if(n==1)
            document.write("<p>" + fib1 + "</p><br/>");
          //if input is two numbers
          else
            document.write("<p>" + fib1 + "</p><br/><p>" + fib2 + "</p><br/>");
            //if input is more than two numbers, find the next Fibonacci number
            for(i=3;i<=n;i++)
              {
                fib=fib1+fib2;
                document.write("<p>" + fib + "</p><br/>");
                fib1=fib2;
                fib2=fib;
              }
        }
      else
        alert("Please enter proper input value");
    </script>
  </body>
</html>
```

Lab3b.html

```
<!DOCTYPE HTML>
<html lang="en">
        <head>
                <meta charset="UTF-8">
                <title>Lab3b</title>

        </head>

        <body>
        <h2> Javascript to generate squares of 1 to 'N' numbers</h2>
        <script type="text/javascript">

                var n=prompt ("Enter the limit 'n' to generate the table of numbers from 1 to n:","");
                var msg="";
                var res= "0";
                for(var x= 1; x<=n;x++)
                {
                        res = x * x;
                        msg = msg + " " + x + " * "+ x + " = " + res + "\n";
                }
                alert(msg);
```

```
                    </script>
            </body>
</html>
```

OUTPUT

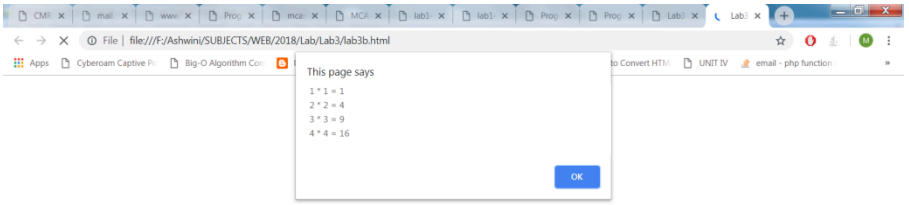

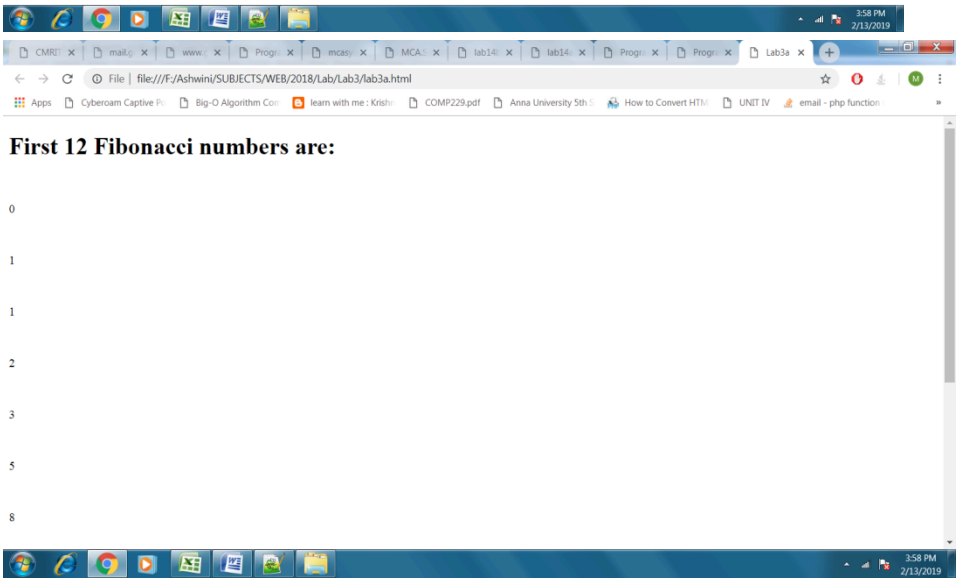

8. Develop and demonstrate, using JavaScript script, a XHTML document that contains three short paragraphs of text, stacked on top of each other, with only enough of each showing so that the mouse cursor can be placed over some part of them. When the cursor is placed over the exposed part of any paragraph, it should rise to the top to become completely visible.

Lab8a.html

```
<?xml version = "1.0" encoding = "utf-8"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.1//EN" "http://www.w3.org/TR/xhtml11/DTD/xhtml11.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
	<head>
		<title>Program 10a</title>
		<script type="text/javascript">
			var oldid="p3";
			function toTop(newid)
			{
				domTop=document.getElementById(oldid).style;
				domNew=document.getElementById(newid).style;
				domTop.zIndex="0";
				domNew.zIndex="10";
				oldid=newid;

			}
		</script>
		<style type="text/css">
			.para1{
				position:absolute;
				top:0px;
				left:0px;
				z-index:0;
				width:200px;
				height:200px;
				background-color:red;
			}
			.para2{
				position:absolute;
				top:100px;
				left:100px;
				z-index:0;
				width:200px;
				height:200px;
				background-color:blue;
			}
			.para3{
				position:absolute;
				top:200px;
				left:200px;
				z-index:0;
				width:200px;
				height:200px;
				background-color:green;
			}
		</style>
	</head>
	<body>
		<p class="para1" id="p1" onmouseover="toTop('p1')"> Frame One </p>
		<p class="para2" id="p2" onmouseover="toTop('p2')"> Frame Three </p>
		<p class="para3" id="p3" onmouseover="toTop('p3')"> Frame Two </p>


	</body>
</html>
```

Lab8b.html

```
<?xml version = "1.0" encoding = "utf-8"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.1//EN" "http://www.w3.org/TR/xhtml11/DTD/xhtml11.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
```

```
<head>
	<title>Program 10b</title>
	<script type="text/javascript">
		var oldid="p3";
		function toTop(topid)
		{
			domTop=document.getElementById(oldid).style;
			domNew=document.getElementById(topid).style;
			domTop.zIndex="0";
			domNew.zIndex="10";
			oldid=topid;

		}
		function toDown(downid)
		{

			document.getElementById(downid).style.zIndex="0";

		}
	</script>
	<style type="text/css">
		.para1{
			position:absolute;
			top:0px;
			left:0px;
			z-index:0;
			width:200px;
			height:200px;
			background-color:red;
		}
		.para2{
			position:absolute;
			top:100px;
			left:100px;
			z-index:0;
			width:200px;
			height:200px;
			background-color:blue;
		}
		.para3{
			position:absolute;
			top:200px;
			left:200px;
			z-index:0;
			width:200px;
			height:200px;
			background-color:green;
		}
	</style>
</head>
<body>
	<p class="para1" id="p1" onmouseover="toTop('p1')" onmouseout="toDown('p1')"> Frame One </p>
	<p class="para2" id="p2" onmouseover="toTop('p2')" onmouseout="toDown('p2')"> Frame Three </p>
	<p class="para3" id="p3" onmouseover="toTop('p3')" onmouseout="toDown('p3')"> Frame Two </p>


</body>
</html>
```

Output

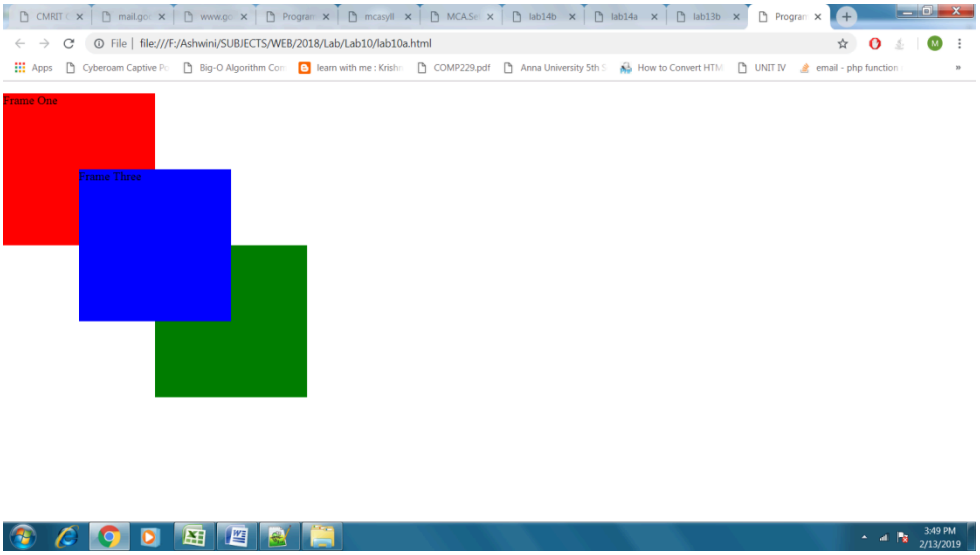

Q9)
Considerthefollowingdatabaseofstudentenrollmentincoursesandbooksadoptedforeachcourse.STUDENT (regno#:string,name:string,major:string,bdate:date)
COURSE (course#: int, cname: string, dept: String)
TEXT(book_ISBN#:int,book_title:string,publisher:string,author:string)
ENROLL (regno#: string, course#: int, sem: int, marks: int) BOOK_ADOPTION (course#: int, sem: int, book_ISBN: int)
Create the above tables by properly specifying the primary keys and the foreign keys
Enter at least 7 to 10 records to each table.
Execute SQL queries for the following requirements:
1) List out the student details, and their course details. The records should be ordered in a semester wise manner.
2) List out the student details under a particular department whose name is ordered in a semester wise
3) List out all the book details under a particular course
4) Find out the Courses in which number of students studying will be more than 2.
5) Find out the Publisher who has published more than 2 books.

```
SQL> CREATE TABLE STUDENT(
  2  REGNO VARCHAR(10),
  3  NAME VARCHAR(10),
  4  MAJOR VARCHAR(10),
  5  BDATE DATE,
  6  PRIMARY KEY(REGNO));

Table created.

SQL> CREATE TABLE COURSE(
  2  COURSENO INT,
  3  CNAME VARCHAR(10),
  4  DEPT VARCHAR(10),
  5  PRIMARY KEY(COURSENO));

Table created.

SQL> CREATE TABLE TEXT(
  2  BOOKISBN INT,
  3  TITLE VARCHAR(20),
  4  PUBLISHER VARCHAR(20),
  5  AUTHOR VARCHAR(20),
  6  PRIMARY KEY(BOOKISBN));

Table created.

SQL> CREATE TABLE ENROLL(
```

```
  2  REGNO VARCHAR(10),
  3  COURSENO INT,
  4  SEM INT,
  5  MARKS INT,
  6  PRIMARY KEY(REGNO,COURSENO,SEM),
  7  FOREIGN KEY(REGNO) REFERENCES STUDENT(REGNO) ON DELETE SET NULL,
  8  FOREIGN KEY(COURSENO) REFERENCES COURSE(COURSENO) ON DELETE SET NULL);
```

Table created.

```
SQL> CREATE TABLE BOOKADOPTION(
  2  COURSENO INT,
  3  SEM INT,
  4  BOOKISBN INT,
  5  PRIMARY KEY(COURSENO,SEM),
  6  FOREIGN KEY(COURSENO) REFERENCES COURSE(COURSENO) ON DELETE SET NULL,
  7  FOREIGN KEY(BOOKISBN) REFERENCES TEXT(BOOKISBN) ON DELETE SET NULL);

SQL> SELECT * FROM STUDENT;

REGNO        NAME        MAJOR        BDATE
2BV10MCA01   JAMES       COMPUTERS    01-JAN-89
2BV10MCA02   JOHN        NETWORKS     02-JAN-90
2BV10MCA03   ARNOLD      SYSTEMS      03-FEB-89
2BV10MCA04   KIM         E&C          04-MAR-90
2BV10MCA05   FRED        E&E          05-APR-89
2BV10MCA06   HARIS       MECH         05-MAY-89

6 rows selected.


SQL> SELECT * FROM COURSE;

 COURSENO    CNAME        DEPT
     1       DBMS         COMPUTERS
     2       CN           NETWORKS
     3       SIMULATION   SYSTEMS
     4       OS           COMPUTERS
     5       DSP          E&C
     6       CIRCUITS     E&E
     7       SOM          MECH
     8       OOP          COMPUTERS
     9       DATACOM      NETWORKS
    10       MACHINES     MECH

10 rows selected.


SQL> SELECT * FROM TEXT;

 BOOKISBN    TITLE              PUBLISHER    AUTHOR
    101      DATABASE SYSTEMS   PEARSON      NAVATHE
    102      OPERATING SYSTEM   TATA         SIBERSCHATZ
    103      SIMULATIONS        TATA         JERRY BANKS
    104      DIP                PEARSON      JERRY
    105      SOM                APRESS       DAVID
    106      DESIGNING          TATA         GEORGE
    107      DATACOM            TATA         ELMASRI
    108      CIRCUITS           PEARSON      TOM

8 rows selected.

SQL> SELECT * FROM ENROLL;
```

REGNO	COURSENO	SEM	MARKS
2BV10MCA01	1	3	80
2BV10MCA02	4	5	70
2BV10MCA03	3	5	89
2BV10MCA04	5	7	90
2BV10MCA05	6	5	76
2BV10MCA06	7	7	89
2BV10MCA01	4	5	79
2BV10MCA04	5	5	80

8 rows selected.

SQL> SELECT * FROM BOOKADOPTION;

COURSENO	SEM	BOOKISBN
1	3	101
3	3	103
4	3	102
5	5	104
6	7	108
7	5	105
9	3	107
10	3	106

8 rows selected.

1)List out the student details, and their course details. The records should be ordered in a semester wise manner.
SELECT S.regno, S.name, S.major, S.bdate, C.course#, C.cname, E.sem FROM STUDENT S JOIN ENROLL E ON S.regno = E.regno JOIN COURSE C ON E.course# = C.course# ORDER BY E.sem;

2) List out the student details under a particular department whose name is ordered in a semester wise
SELECT S.regno, S.name, S.major, S.bdate, C.course#, C.cname, E.sem FROM STUDENT S JOIN ENROLL E ON S.regno = E.regno JOIN COURSE C ON E.course# = C.course# WHERE C.dept = 'CS' ORDER BY E.sem;

3) List out all the book details under a particular course
SELECT T.book_ISBN#, T.book_title, T.publisher, T.author FROM TEXT T JOIN BOOK_ADOPTION B ON T.book_ISBN# = B.book_ISBN# WHERE B.course# = 102;

4) Find out the Courses in which number of students studying will be more than 2.
SELECT C.course#, C.cname, COUNT(E.regno) AS student_count FROM COURSE C JOIN ENROLL E ON C.course# = E.course# GROUP BY C.course#, C.cname HAVING COUNT(E.regno) > 2;

5) Find out the Publisher who has published more than 2 books.
SELECT publisher, COUNT(book_ISBN#) AS book_count FROM TEXT GROUP BY publisher HAVING COUNT(book_ISBN#) > 2;

10. Develop, test and validate an XHTML document that has checkboxes for apple (59 cents each), orange (49 cents each), and banana (39 cents each) along with submit button. Each checkboxes should have its own onclick event handler. These handlers must add the cost of their fruit to a total cost. An event handler for the submit button must produce an alert window with the message 'your total cost is $xxx', where xxx is the total cost of the chose fruit, including 5 percent sales tax. This handler must return 'false' (to avoid actual submission of the form data). Modify the document to accept quantity for each item using textboxes
Lab4a.html

```
<!DOCTYPE html>
<html>
	<head>
		<title>Program 6a</title>
		<script type="text/javascript">
			var cost1=0, cost2=0, cost3=0, totcost=0, sale_cost=0;
			function fun1(t1)
			{
				cost1=parseInt(cost1+t1);
```

```
                }
                function fun2(t2)
                {
                        cost2=parseInt(cost2+t2);

                }
                function fun3(t3)
                {
                        cost3=parseInt(cost3+t3);

                }
                function show()
                {
                        totcost=parseInt(cost1+cost2+cost3);
                        sale_cost=(totcost*0.05);
                        totcost=totcost+sale_cost;
                        alert("Your total cost is : $"+(totcost));
                        return false;
                }
            </script>
        </head>
        <body>

            <input type="checkbox" name="check1" value="59" onClick="fun1('59')">Apple 59 cents </br>
            <input type="checkbox" name="check2" value="49" onClick="fun2('49')">Orange 49 cents </br>
            <input type="checkbox" name="check3" value="39" onClick="fun3('39')">Banana 39 cents </br>
            <input type="submit" value="click" name="submit" onClick="show()" />
        </body>
</html>
```

Lab4b.html

```
<!DOCTYPE html>
<html>
        <head>
            <title>Program 6b</title>
            <script type="text/javascript">
                var cost1=0, cost2=0, cost3=0, totcost=0, sale_cost=0;
                function fun1(t1)
                {
                        cost1=parseInt(cost1+t1);

                }
                function fun2(t2)
                {
                        cost2=parseInt(cost2+t2);

                }
                function fun3(t3)
                {
                        cost3=parseInt(cost3+t3);

                }
                function show()
                {
                        var qty1=parseInt(document.getElementById("qty1").value);
                        var qty2=parseInt(document.getElementById("qty2").value);
                        var qty3=parseInt(document.getElementById("qty2").value);
                        if(qty1){
                                cost1=parseInt(cost1*qty1);
                        }
                        if(qty2){
                                cost2=parseInt(cost2*qty2);
                        }
                        if(qty3){
```

```
                                        cost3=parseInt(cost3*qty3);
                                }
                                totcost=cost1+cost2+cost3;
                                sale_cost=Math.round(totcost*0.05);
                                totcost=totcost+sale_cost;
                                alert("Your total cost is : $"+(totcost));
                                return false;
                        }
                </script>
        </head>
        <body>

                <input type="checkbox" name="check1" value="59" onclick="fun1('59')">Apple 59 cents  Quantity:<input type="text" name="qty1" id="qty1"/></br>
                <input type="checkbox" name="check2" value="49" onclick="fun2('49')">Orange 49 cents Quantity:<input type="text" name="qty2" id="qty2"/></br>
                <input type="checkbox" name="check3" value="39" onclick="fun3('39')">Banana 39 cents Quantity:<input type="text" name="qty2" id="qty2"/></br>
                <input type="submit" value="click" name="submit" onclick="show()" />
        </body>
</html>
```
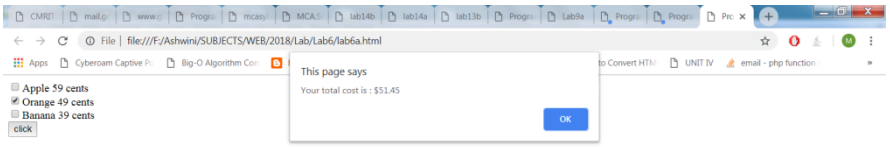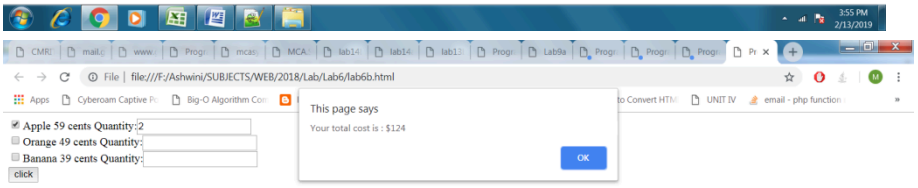
OUTPUT