NorthStar Advisory Services

Dynamic View Generation Using EJS Template Engine

Deren Daniel Karabillioglu | Modern Web Technologies

Implementation overview

This application replaces independent static pages with one server-rendered portal. Node.js and Express handle requests; EJS generates pages from a centralized JSON dataset. Express EJS Layouts applies the same layout to all pages. Bootstrap is installed as a dependency and served locally.

Requirement	Implementation
Server setup	app.js: EJS, layout middleware, static hosting
Reusable architecture	main.ejs + header, navigation, footer and risk badge
Dynamic client list	JSON records rendered using EJS iteration
Client profiles	GET /clients/:id resolves a dataset record
Classification and risk	Shown on directory and profile pages
Dataset freshness	File read on every request; no restart needed
Consistent interface	Local Bootstrap + shared custom stylesheet

Installation and routes


Requires Node.js 20 or later. Run **npm ci**, then **npm start**. Visit http://localhost:3000. Routes: **/** (overview), **/clients** (directory), **/clients/:id** (profile). Example: /clients/NS-001.

Validation

Four integration tests passed: shared layout and local Bootstrap; all dataset records and profile links; next-request dataset updates and HTML escaping; missing records/routes and malformed dataset handling. Run npm test to reproduce. All demonstration data is fictional.

Shared layout and overview

The common header, navigation and footer surround dataset-derived overview statistics.

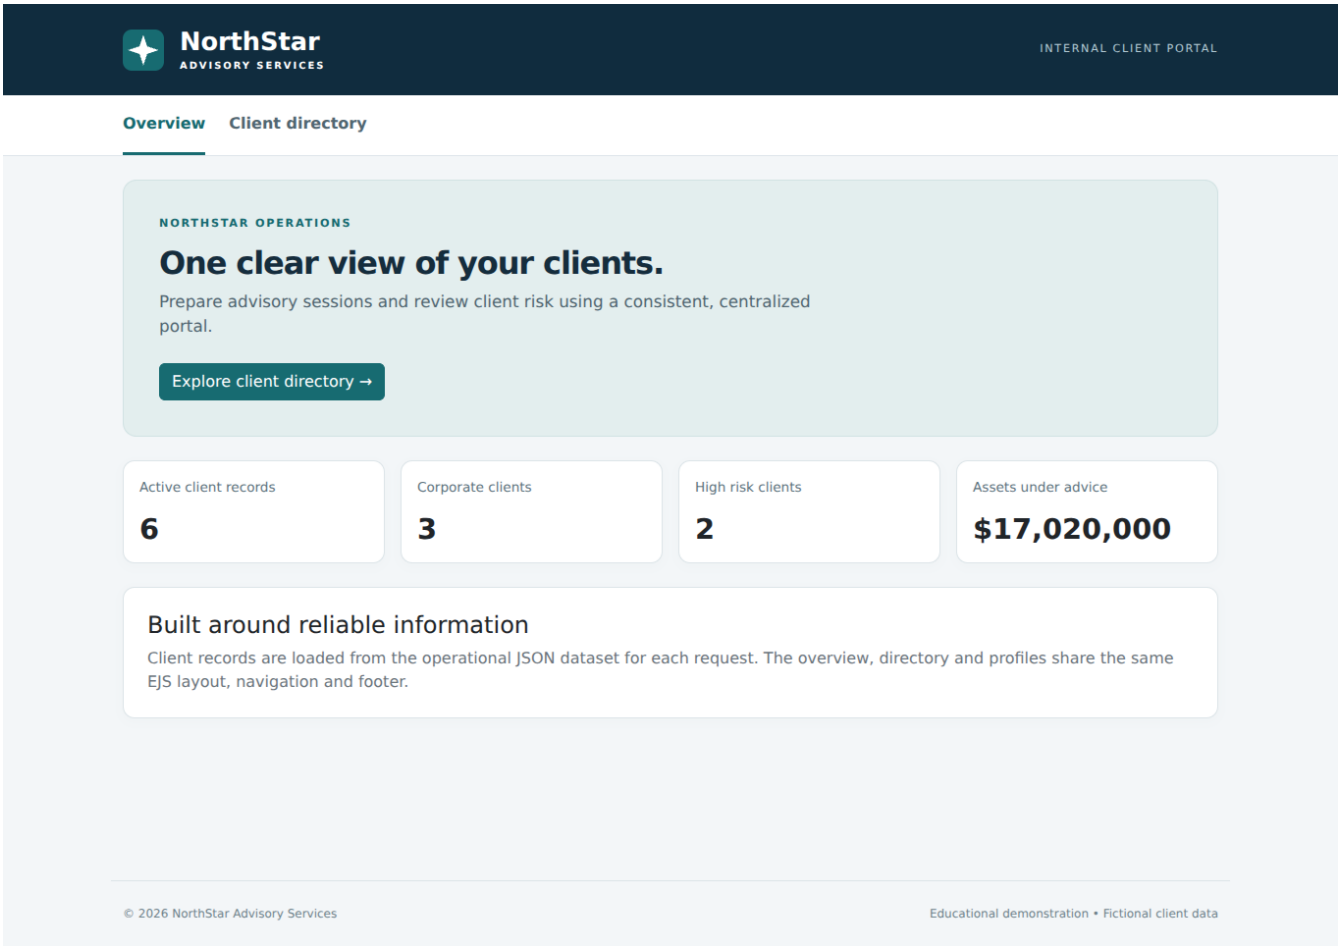


Template architecture

Request -> route -> controller -> JSON dataset -> page template -> shared layout and partials. Client values use escaped EJS output; only trusted template fragments and the rendered body use unescaped output.

Dynamic client directory

EJS iteration creates the rows, profile links, classification values and risk badges.

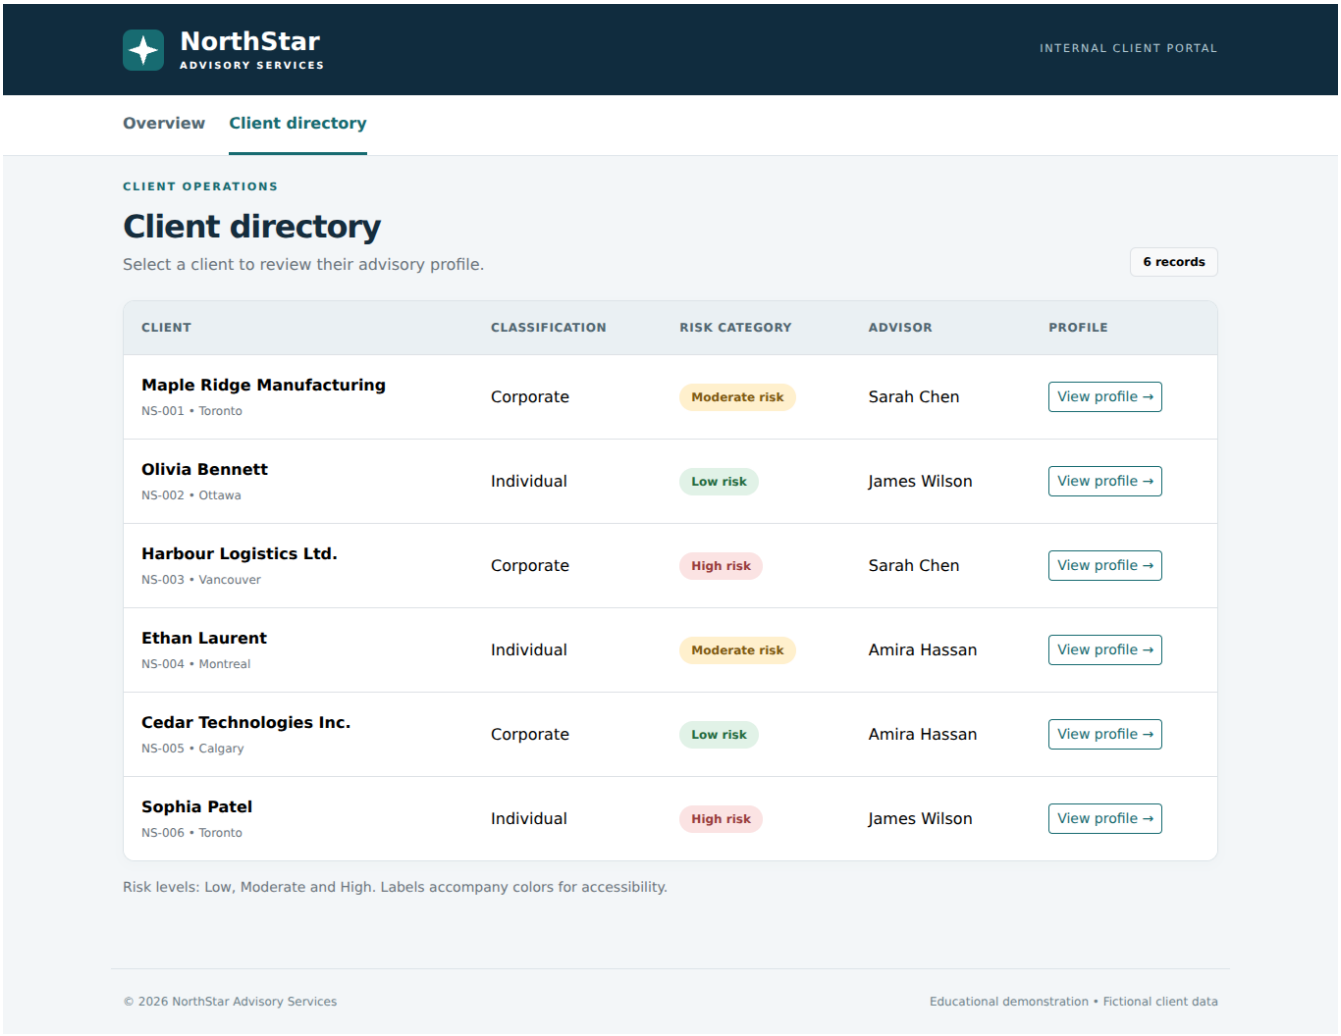


Template architecture

Request -> route -> controller -> JSON dataset -> page template -> shared layout and partials. Client values use escaped EJS output; only trusted template fragments and the rendered body use unescaped output.

Dynamic client profile

One template renders the selected record, advisory details and review schedule.

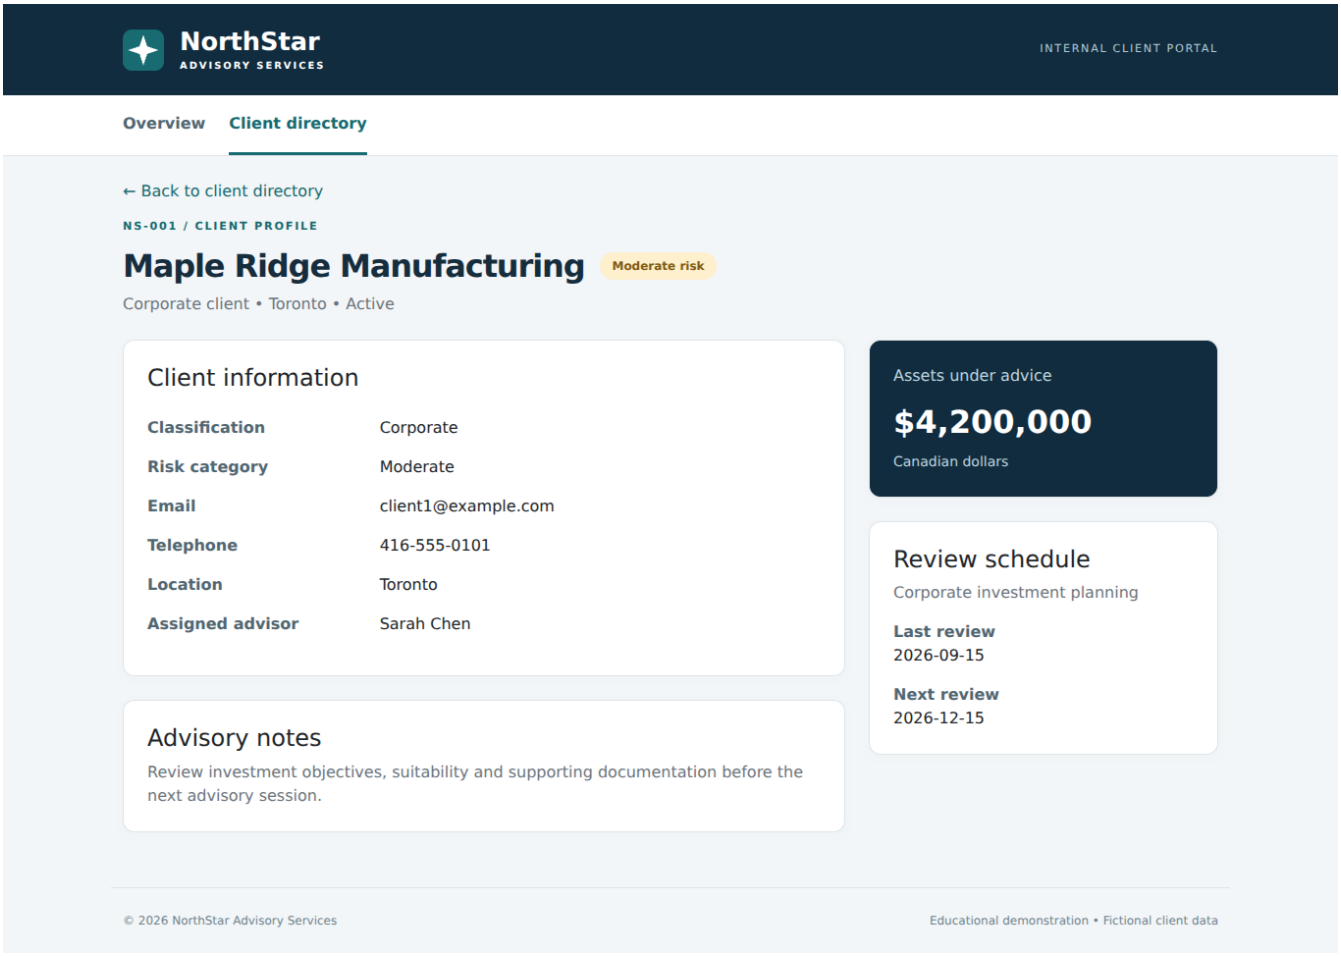

Template architecture

Request -> route -> controller -> JSON dataset -> page template -> shared layout and partials. Client values use escaped EJS output; only trusted template fragments and the rendered body use unescaped output.