

01 - Backend no ar - print do Grafana rodando

Grafana

Home

Bookmarks

Starred

Dashboards

Playlists

Snapshots

Library panels

Shared dashboards

Recently deleted

Explore

Drilldown

Alerting

Connections

Administration

Explore

Tempo

Go queryless

Split

Add

Last 1 hour

Run query

Share

Queries

Table

Query type

Search

TraceQL

Service Graph

Import trace

Service Name

=

Select value

Span Name

=

dsc-eq16

Status

=

Select value

Duration

span

>

e.g. 100ms, 1.2s

<

e.g. 100ms, 1.2s

Tags

span

Select tag

=

Select value

Edit in TraceQL

Search Options

Limit: 20

Spans Limit: 3

Table Format: Traces

Streaming: Disabled

Metrics Options

Step: auto

Type: Range

Streaming: Disabled

Add query

Query history

Query inspector

Table - Traces

	Trace ID	Start time	Service	Name	Duration
>	4e893dbc38a528848eebcd146a699	2026-07-22 13:16:33.691	dsc-eq16	GET /api/auth/[...nextauth]	16 ms
>	688bd65cfba626a40bb703315ce653	2026-07-22 13:16:33.600	dsc-eq16	GET /api/auth/[...nextauth]	39 ms
>	702e3bb0d25005b087c9424bd003b	2026-07-22 13:16:33.383	dsc-eq16	GET	8 ms
>	59af66693a65fce13ab122b2fde1bfa	2026-07-22 13:16:33.263	dsc-eq16	GET /inicio	55 ms
>	201c8c1e9777bb367d45f9950b0105c	2026-07-22 13:16:32.249	dsc-eq16	GET /api/auth/[...nextauth]	40 ms
>	aefc438d866ace9e64f112986317e50	2026-07-22 13:16:32.187	dsc-eq16	GET /api/auth/[...nextauth]	39 ms

2 - Trace de uma operação real + 3 Query SQL visível

The image displays a Jaeger trace for a service named `dsc-eq16`. The top section shows a `PATCH /api/candidaturas/[id]` operation with a duration of 1.38s. Below this, a detailed view of a `pg.query:SELECT rinha_teamfinder` span is shown, with a duration of 5.3ms. The span attributes include database connection details, the SQL query, and network information.

Service & Operation

- `dsc-eq16` PATCH (1.38s)
 - PATCH /api/candidaturas/[id] (1.38s)
 - resolve page components (25.54ms)
 - executing api route (app) /api/candidaturas/[id] (61.33ms)
 - candidatura.aceitar (47.45ms)
 - pg-pool.connect (77.8µs)
 - pg.query:SELECT rinha_teamfinder (1.08ms)
 - pg-pool.connect (192µs)
 - pg.query:SELECT rinha_teamfinder (827.6µs)
 - pg-pool.connect (9.8ms)
 - pg.connect (9.42ms)
 - dns.lookup (799.9µs)
 - tcp.connect (1.5ms)
 - pg.query:SELECT rinha_teamfinder (2.75ms)
 - pg-pool.connect (81.9µs)
 - pg.query:SELECT rinha_teamfinder (5.3ms)
 - pg-pool.connect (95.3µs)
 - pg.query:SELECT rinha_teamfinder (975.4µs)
 - pg-pool.connect (270µs)
 - pg.query:BEGIN rinha_teamfinder (1.11ms)
 - pg.query:UPDATE rinha_teamfinder (1.86ms)
 - pg.query:UPDATE rinha_teamfinder (2.58ms)
 - pg.query:DELETE rinha_teamfinder (1.37ms)
 - pg.query:COMMIT rinha_teamfinder (1.78ms)
 - pg-pool.connect (99.7µs)
 - pg.query:INSERT rinha_teamfinder (5.03ms)
 - start response (8.4µs)

pg.query:SELECT rinha_teamfinder

Service: `dsc-eq16` Duration: 5.3ms Start Time: 1.35s (21:30:38.067) Kind: client Status: unset
Library Name: `@opentelemetry/instrumentation-pg` Library Version: 0.72.0

Span attributes

- `db.connection_string`: "postgresql://localhost:5435/rinha_teamfinder"
- `db.name`: "rinha_teamfinder"
- `db.statement`: "SELECT \"public\".\"Candidatura\".\"id\", \"public\".\"Candidatura\".\"userId\" FROM \"public\".\"Candidatura\" WHERE (\"public\".\"Candidatura\".\"equipeId\" = \$1 AND \"public\".\"Candidatura\".\"lane\" = CAST(\$2::text AS \"public\".\"Lane\") AND \"public\".\"Candidatura\".\"status\" = CAST(\$3::text AS \"public\".\"StatusCandidatura\") AND (NOT \"public\".\"Candidatura\".\"id\" = \$4)) OFFSET \$5"
- `db.system`: "postgresql"
- `db.user`: "postgres"
- `net.peer.name`: "localhost"
- `net.peer.port`: 5435

Resource attributes

- `host.arch`: amd64
- `host.id`: ac0add54-e2b6-49ca-bb51-c74668ad5af8
- `host.name`: PCMONSTRO
- `process.c...`

SpanID: f2454b4259f754cb

pg.query:INSERT rinha_teamfinder (5.03ms) 

pg.query:INSERT rinha_teamfinder [Logs for this span](#) [Share](#)

Service: dsc-eq16  Duration: 5.03ms  Start Time: 1.38s (21:30:38.097) Kind: client Status: unset
Library Name: @opentelemetry/instrumentation-pg Library Version: 0.72.0

Span attributes


db.connection_string	"postgresql://localhost:5435/rinha_teamfinder"
db.name	"rinha_teamfinder"
db.statement	"INSERT INTO \"public\".\"AuditLog\" (\"id\",\"action\",\"actorId\",\"actorLabel\",\"targetType\",\"targetId\",\"metadata\",\"ip\",\"userAgent\",\"created VALUES (\$1,\$2,\$3,\$4,\$5,\$6,\$7,\$8,\$9,\$10) RETURNING \"public\".\"AuditLog\".\"id\", \"public\".\"AuditLog\".\"action\", \"public\".\"AuditLog\".\"actorId\", \"public\".\"AuditLog\".\"actorLabel\", \"public\".\"AuditLog\".\"targetType\", \"public\".\"AuditLog\".\"targetId\", \"public\".\"AuditLog\".\"metadata\", \"public\".\"AuditLog\".\"ip\", \"public\".\"AuditLog\".\"userAgent\", \"public\".\"AuditLog\".\"createdAt\""
db.system	"postgresql"
db.user	"postgres"
net.peer.name	"localhost"
net.peer.port	5435

Resource attributes host.arch amd64 host.id ac0add54-e2b6-49ca-bb51-c74668ad5af8 host.name PCMONSTRO process.co...


SpanID: dae729190e46666c

Aqui nós temos o trace da operação de aceitar candidatura de um jogador em uma equipe. Podemos perceber que a operação que leva mais tempo é o SELECT no banco de dados que busca o id da candidatura e o id do usuário.

4 -

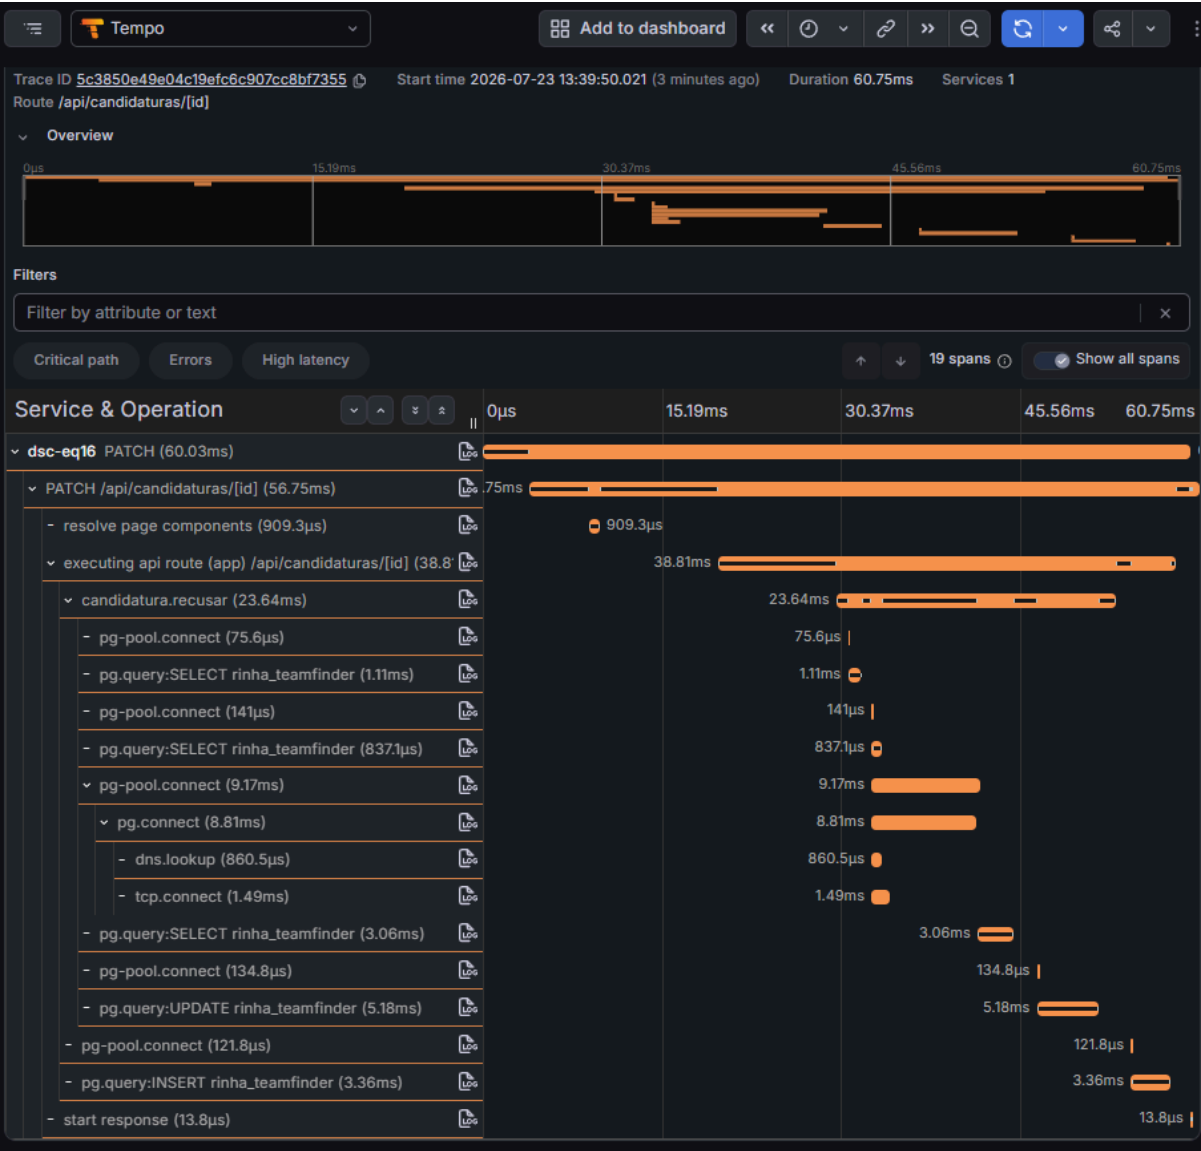

candidatura.recusar

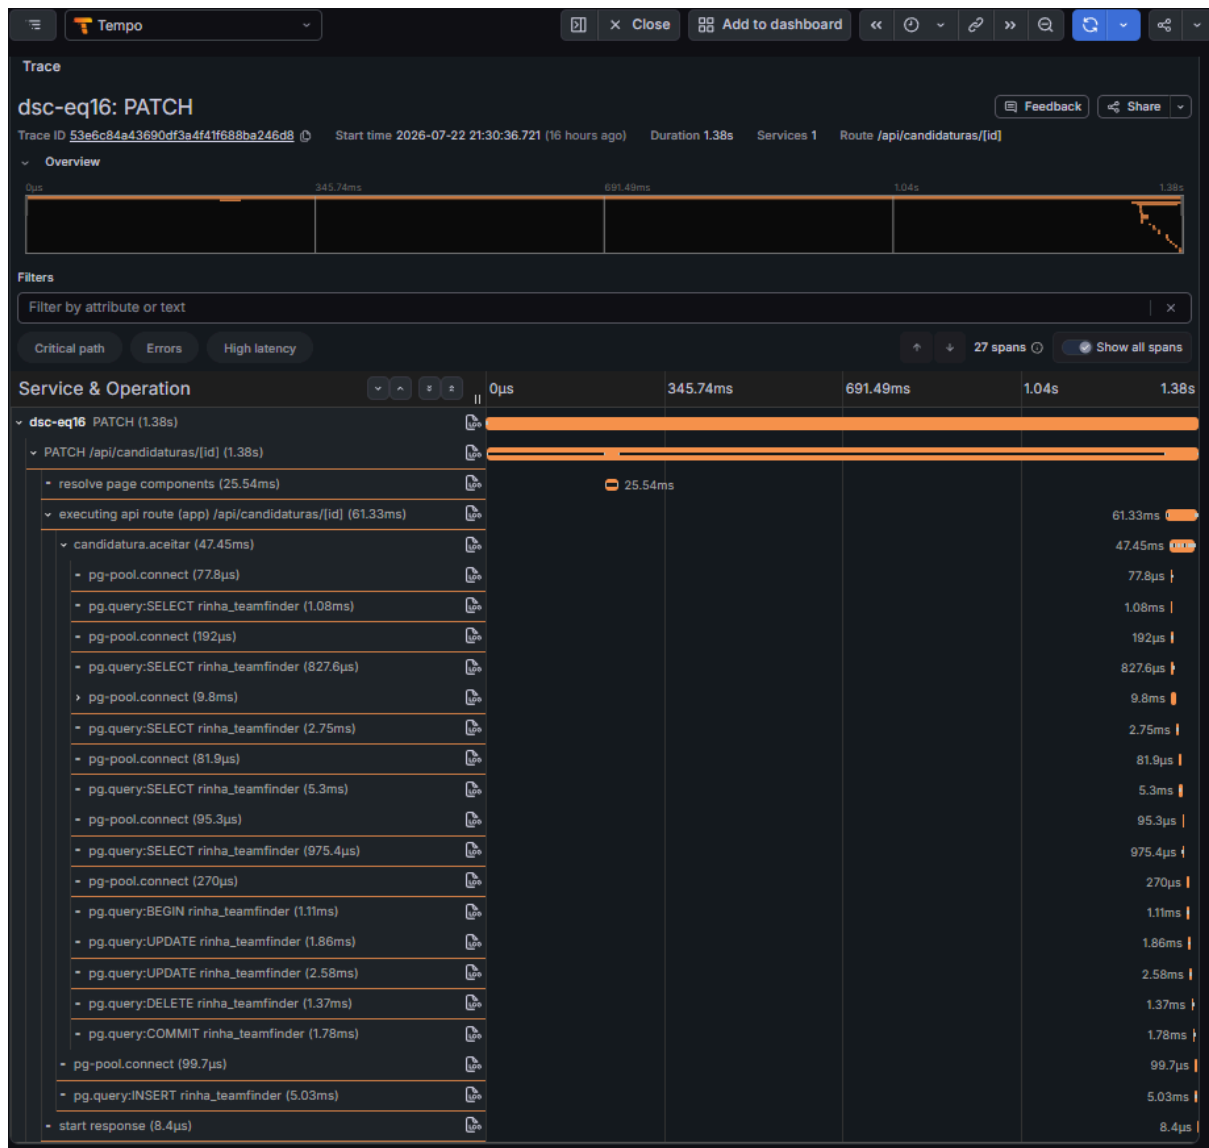


candidatura.aceitar

5 -

```
export async function aceitarCandidatura(
  candidaturaId: string,
  atorId: string,
  atorIsAdmin: boolean,
) {
  // startActiveSpan torna este span o "atual": tudo que rodar dentro do callback
  // (inclusive as queries do Prisma) fica aninhado sob ele na cascata do trace.
  return tracer.startActiveSpan("candidatura.aceitar", async (span) => {
    await new Promise((r) => setTimeout(r, 800)); // atraso artificial - REMOVER depois
    span.setAttribute("candidatura.id", candidaturaId);
    span.setAttribute("ator.isAdmin", atorIsAdmin);
  });
}
```

Inserimos de forma proposital um atraso de 800ms na operação de aceitar candidatura e podemos observar isso no trace abaixo:

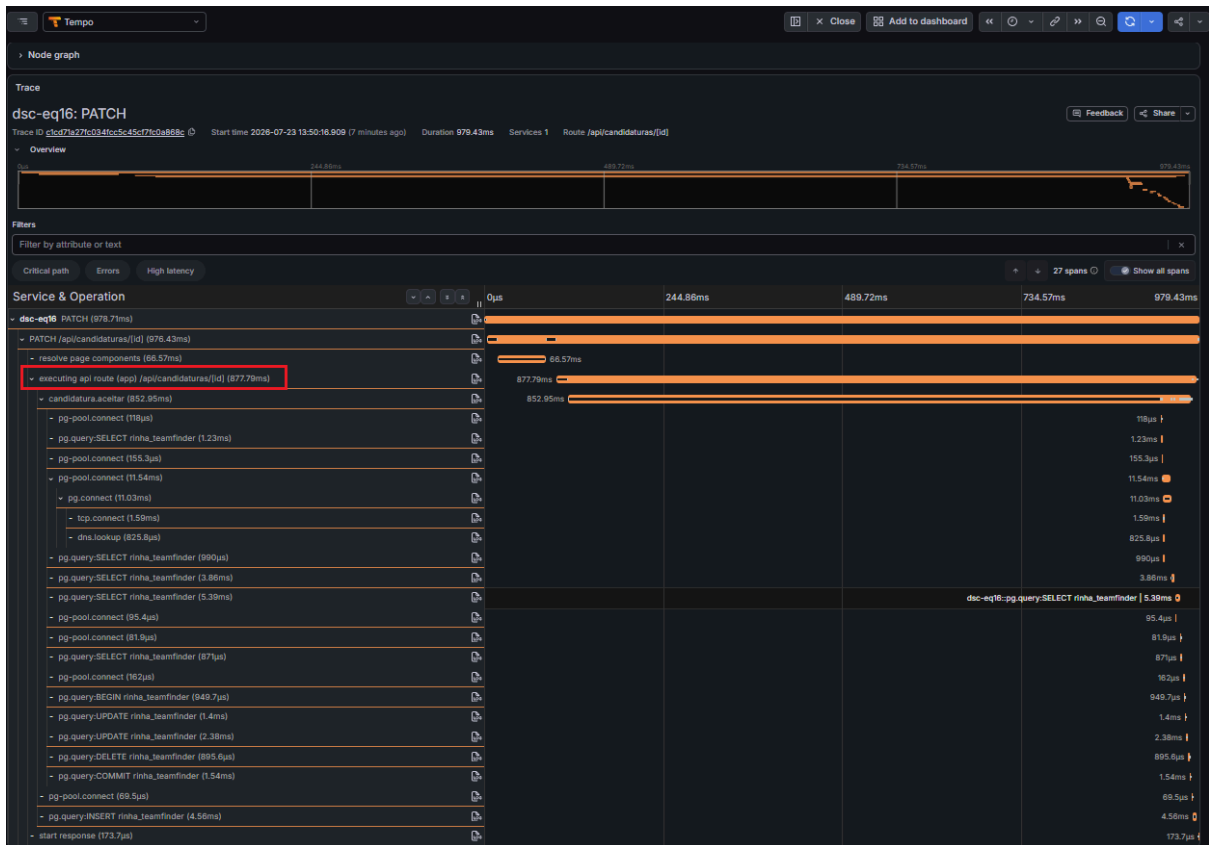

6 - Atributo customizado: No caso abaixo, com o atributo candidatura.lane nós conseguimos filtrar eventos de candidatura para determinada posição de jogador (TOP, JUNGLE, MID, ADC, SUPORTE, FILL).

