


```
extern crate timely;
use timely::dataflow::operators::*;
fn main() {
    timely::example(|scope| {
        (0.10).to_stream(scope)
               exchange(|&x| x)
               inspect(|x| println!("{}", x));
    });
```

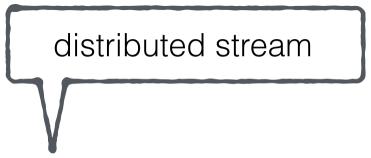

```
fn main() {
    timely::execute_from_args(std::env::args(), |worker| {
```

```
});
```

```
extern crate timely;
use timely::dataflow::operators::*;
fn main() {
    timely::example(|scope| {
        (0..10).to_stream(scope)
               exchange(|&x| x)
               inspect(|x| println!("{}", x));
    });
```