


Redundancy and Replication

Redundancy ([https://en.wikipedia.org/wiki/Redundancy_\(engineering\)](https://en.wikipedia.org/wiki/Redundancy_(engineering))) is the duplication of critical components or functions of a system with the intention of increasing the reliability of the system, usually in the form of a backup or fail-safe, or to improve actual system performance. For example, if there is only one copy of a file stored on a single server, then losing that server means losing the file. Since losing data is seldom a good thing, we can create duplicate or redundant copies of the file to solve this problem.

Redundancy plays a key role in removing the single points of failure in the system and provides backups if needed in a crisis. For example, if we have two instances of a service running in production and one fails, the system can failover to the other one.



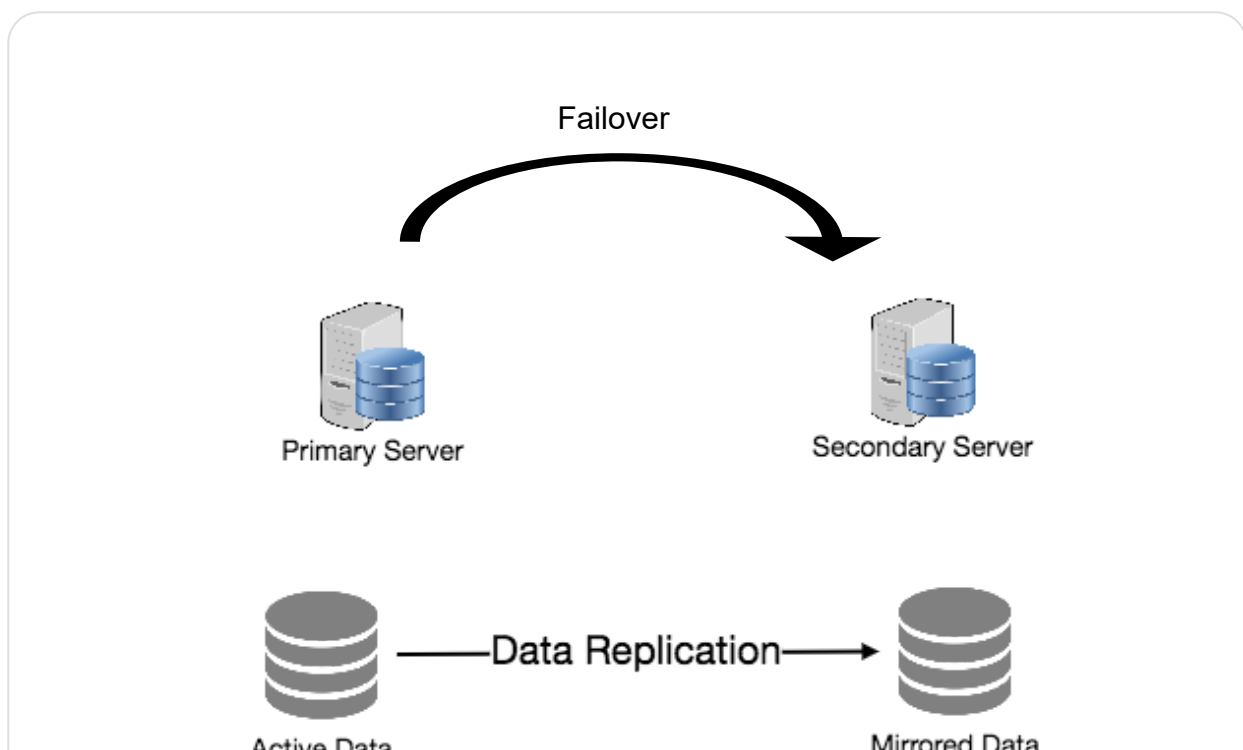

Replication ([https://en.wikipedia.org/wiki/Replication_\(computing\)](https://en.wikipedia.org/wiki/Replication_(computing))) means sharing information to ensure consistency between redundant resources, such as software or hardware components, to improve reliability, fault-tolerance (https://en.wikipedia.org/wiki/Fault_tolerance), or accessibility.

Replication is widely used in many database management systems (DBMS), usually with a master-slave relationship between the original and the copies. The master gets all the updates, which then ripple through to the slaves. Each slave outputs a message stating that it has received the update successfully, thus allowing the sending of subsequent updates.

← **Back**

(/courses/grokking-

the-
system-

design-
Proxies

interview/N8G9MvM4OR2)

✓ **Next** →
Mark as Completed
(/courses/grokking-

the-
system-

design-
SQL vs. NoSQL

interview/YQIK1mDPgpK)

Stuck?

DISCUSS

Get help on (<https://discuss.educative.io/c/grokking-the-system-design-interview-design-gurus/glossary-of-system-design-basics-redundancy-and-replication>)



Send
feedback



23
Recommendations