Welcome to the generated API reference. Get Postman Collection

1 Field Explanation

Field	Explanation
product	**Product field（eg:pp,pn,pp,qty,extend etc.）**
pc	Product code
pn	Product name
pp	Product price
qty	Product quantity
extend	Extension fields,
led	**Led field{**r,g,b,time_on,time**}**
{r,g,b,time_on,time}	{r(red：0~100),g(green：0~100),b(blue：0~100), time_on（unit：ms，The continued flash time for a single flash）, time（unit：minutes，The continued time of flashing）}

1.1 API example：

1.1.1 Download postman： Get Postman Collection, import the collection file into the postman：

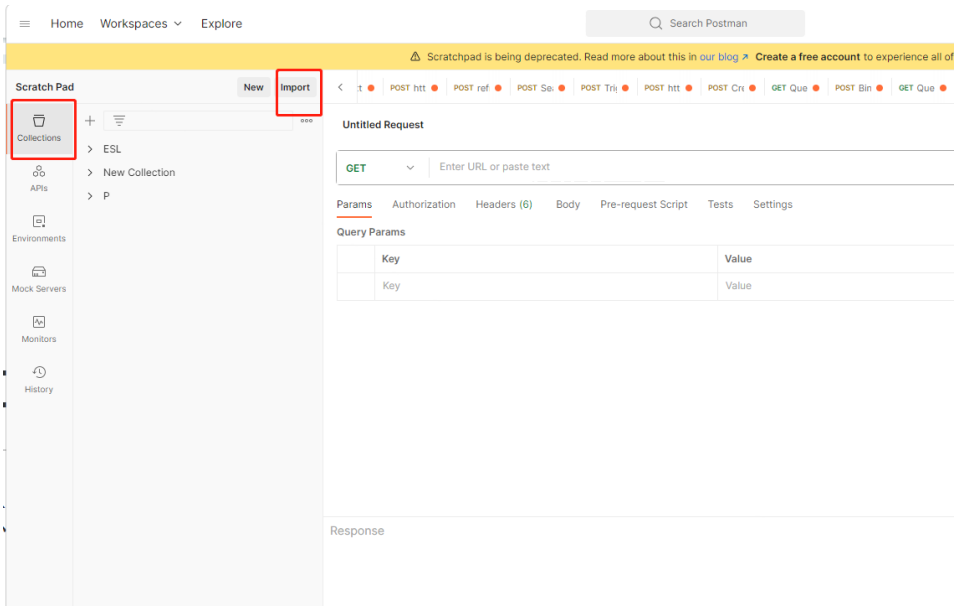

1.1.2 Replace the localhost with the host domain name, and replace the request url’s default as your app-key’s name, and the body’s sign parameter’s value as your app-key’s

value, and you can the app-key's information at the branch's setting

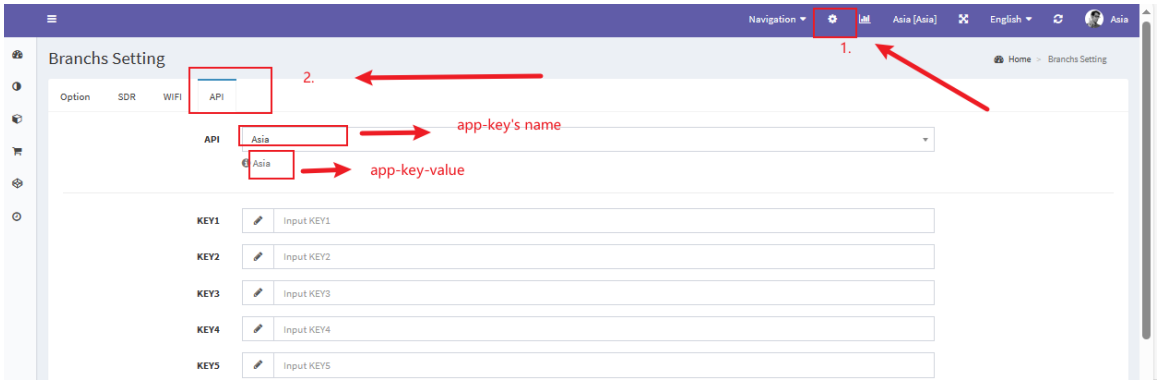

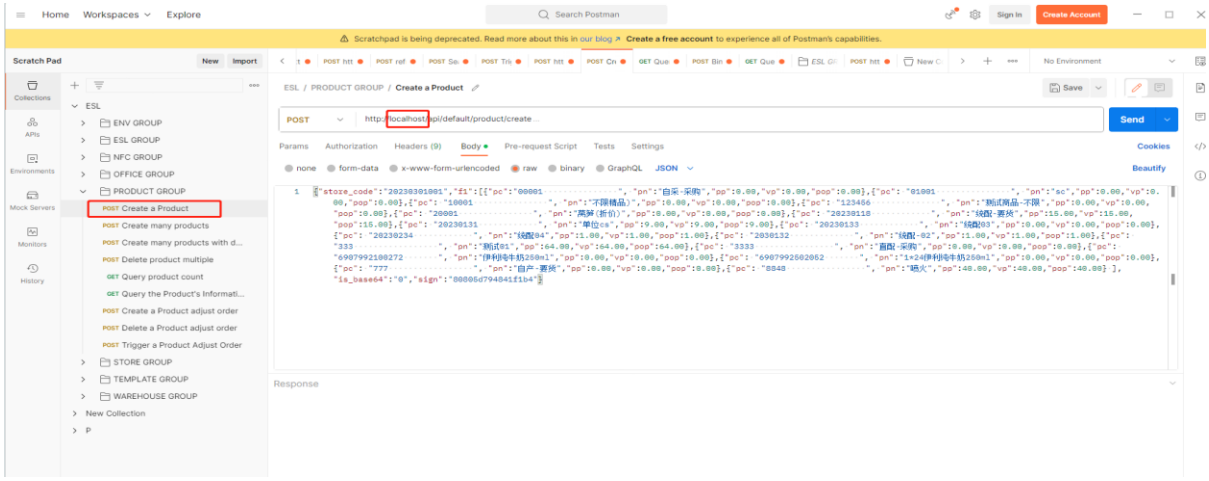

2 ENV GROUP

2.1 Query the Env's Information

2.1.1 HTTPS Request

GET api/query/env

2.1.2 Example request:

```
const url = new URL("https://localhost/api/query/env"); let headers = {
 "Accept": "application/json",
"Content-Type": "application/json",
  }

  fetch(url, {
```

```
method: "GET",
headers: headers,
  })
.then(response => response.json())
.then(json => console.log(json));
```

2.1.3 Example response (200):


```
  {
 "name": "Laravel",
 "env": "documentation", "version": "2.0.6",

  "debug": false,
"url": "https:\/\/localhost", "timezone": "Asia\/Shanghai", "locale": "zh-CN",
 "fallback_locale": "zh-CN", "cipher": "AES-256-CBC",
  "log": "daily",
 "log_level": "info", "log_max_files": 3
  }
```


NAV

3 ESL GROUP

3.1 Bind a product and a esl

after doing it, the esl will be filled in refresh queue, you can use bind_task to trigger it.

3.1.1 HTTPS Request

POST api/{i_client_id}/esl/bind

Body Parameters

Parameter	Type	Status	Description
store_code	string	required	store's code
f1	string	required	esl's code
f2	string	required	produdct's code
f3	string	optional	template id

Parameter	Type	Status	Description
is_base64	string	optional	default is 0
sign	string	required	sign

3.1.2 Example request:

```
const url = new URL("https://localhost/api/default/esl/bind"); let headers ={
"Content-Type": "application/json", "Accept": "application/json",
  }

 let body = {
"store_code": "001",
"f1": "54300001",
 "f2": "6943093201838",
  "f3": "3",
"is_base64": "0",
"sign": "80805d794841f1b4"
  }
  fetch(url, {
method: "POST", headers: headers, body: body
  })
.then(response => response.json())
.then(json => console.log(json));
```

3.1.3 Example response (200):

```
{
"error_code": 1,
"error_msg": "default missing store_code field"
}
```

3.2 Bind many products and esls

after doing it, the esl will be filled in refresh queue, you can use bind_task to trigger it.

3.2.1 HTTPS Request

POST api/{i_client_id}/esl/bind_multiple

Body Parameters

Parameter	Type	Status	Description
store_code	string	required	store's code
f1	array	required	product's info
is_base64	string	optional	default is 0
sign	string	required	sign

3.2.2 Example request:

```
const url = new URL("https://localhost/api/default/esl/bind_multiple"); let headers ={
"Content-Type": "application/json", "Accept": "application/json",
}

let body = {
"store_code": "001",
```

```
    "f1": "[{\"esl_code\":\"xxxxxxx\", \"product_code\":\"xxxxxxxx\", \
"is_base64": "0",
    "sign": "80805d794841f1b4"
      }

      fetch(url, {
    method:  "POST",  headers: headers, body:  body
      })

        then(response => response.json())
        .then(json => console.log(json));
```

3.2.3 Example response (200):

```
{
"error_code": 1,
"error_msg": "default missing store_code field"
}
```

3.3 Unbind a esl

after doing it, the esl will fill in refresh queue, you can use the bind_task to trigger it.

3.3.1 HTTPS Request

POST api/{i_client_id}/esl/unbind

Body Parameters

Parameter	Type	Status	Description
store_code	string	required	store's code
f1	string	required	esl's code
is_base64	string	optional	default is 0
sign	string	required	sign

3.3.2 Example request:

```
const url = new URL("https://localhost/api/default/esl/unbind"); let headers ={
"Content-Type": "application/json", "Accept": "application/json",
  }

 let body = {
"store_code": "001",
"f1": "54300001",
"is_base64": "0",
"sign": "80805d794841f1b4"
  }

  fetch(url, {
method: "POST", headers: headers, body: body
  })
.then(response => response.json())
.then(json => console.log(json));
```

3.3.3 Example response (200):

```
  {
  "error_code": 1,
"error_msg": "default missing store_code field"
  }
```

3.4 Searh esl with flash light

you can use this api to make esl Led flashing.

3.4.1 HTTPS Request

POST api/{i_client_id}/esl/search

Body Parameters

Parameter	Type	Status	Description
store_code	string	required	store's code
f1	string	required	esl's codes array
is_base64	string	optional	default is 0
sign	string	required	sign

3.4.2 Example request:

```
const url = new URL("https://localhost/api/default/esl/search"); let headers ={
"Content-Type": "application/json", "Accept":  "application/json",
  }

 let body = {
"store_code": "001",
"f1": "[54300001,54300002]",
"is_base64": "0",
"sign": "80805d794841f1b4"
  }

  fetch(url, {

 method:  "POST",  headers: headers, body:  body
  })
.then(response => response.json())
.then(json => console.log(json));
```

3.4.3 Example response (200):

```
{
"error_code": 1,
"error_msg": "default missing store_code field"
}
```

3.5 Sync esl status

you can use this api to sync esl status.

3.5.1 HTTPS Request

POST api/{i_client_id}/esl/sync

Body Parameters

Parameter	Type	Status	Description
store_code	string	required	store's code
is_base64	string	optional	default is 0
sign	string	required	sign

3.5.2 Example request:

```
const url = new URL("https://localhost/api/default/esl/sync"); let headers ={
"Content-Type": "application/json", "Accept": "application/json",
  }

 let body = {
"store_code": "001",
"is_base64": "0",
"sign": "80805d794841f1b4"
  }

  fetch(url, {
method: "POST", headers: headers, body: body
  })
.then(response => response.json())
.then(json => console.log(json));
```

3.5.3 Example response (200):

```
  {
  "error_code": 1,
"error_msg": "default missing store_code field"
  }
```

3.6 refresh and splash many esls with product info and template info, led info

after doing it, the esls will be refresh and splash directly

3.6.1 HTTPS Request

POST api/{i_client_id}/esl/direct

Body Parameters

Parameter	Type	Status	Description

store_code	string	required	store's code
f1	array	required	products array
is_base64	string	optional	default is 0
sign	string	required	sign

3.6.2 Example request:

```
const url = new URL("https://localhost/api/default/esl/direct"); let headers =
{
"Content-Type": "application/json", "Accept": "application/json",
}

let body = {
"store_code": "001",
"f1": "[{\"esl_code\":\"54200001\",\"template_id\":11,\"product\":{
"is_base64": "0",
"sign": "80805d794841f1b4"
}

fetch(url, {
method: "POST", headers: headers, body: body
})
.then(response => response.json())
.then(json => console.log(json));
```

3.6.3 Example response (200):

```
{
"error_code": 1,
"error_msg": "default missing store_code field"
}
```

3.7 Trigger the Esl Refresh

This is a trigger, after doing it, the esl will refresh when the esl is in refresh queue.

3.7.1 HTTPS Request

POST api/{i_client_id}/esl/bind_task

Body Parameters

Parameter	Type	Status	Description
store_code	string	required	store's code
is_base64	string	optional	default is 0
sign	string	required	sign

NAV

3.7.2 Example request:

```
const url = new URL("https://localhost/api/default/esl/bind_task"); let headers
={
 "Content-Type": "application/json", "Accept": "application/json",
  }

 let body = {
 "store_code": "001",
 "is_base64": "0",
 "sign": "80805d794841f1b4"
  }

  fetch(url, {
method: "POST", headers: headers, body: body
  })
.then(response => response.json())
.then(json => console.log(json));
```

3.7.3 Example response (200):

```
  {
  "error_code": 1,
 "error_msg": "default missing store_code field"
  }
```

3.8 Query the Esl's Information

3.8.1 HTTPS Request

GET api/{i_client_id}/esl/query

≡ Query Parameters

Parameter	Status	Description
store_code	required	store's code
f1	optional	which page
f2	optional	size in one page
is_base64	optional	default is 0
sign	required	sign

3.8.2 Example request:

```
const url = new URL("https://localhost/api/default/esl/query"); let params =
{
"store_code": "001",
 "f1": "1",
 "f2": "10",
"is_base64": "0",
"sign": "80805d794841f1b4",
  };
Object.keys(params).forEach(key => url.searchParams.append(key, par

 let headers = {
"Accept": "application/json",
"Content-Type": "application/json",
  }

 fetch(url, {
method: "GET",
headers: headers,
  })

    then(response => response.json())
    .then(json => console.log(json));
```

3.8.3 Example response (200):


```
[
{
"esl_code": "a4502393",
"esl_version": "2001\/2306\/0101", "action": 0,
"online": 0,
"esl_battery": 3032,
"product_code": "666666",
"created_at": "2023-02-27 11:28:42",
"updated_at": "2023-02-28 16:23:41",
"ap_code": "40:d6:3c:2d:22:07", "esltype_code": "ESL-29R"
},
{
"esl_code": "c4300017",
"esl_version": "2003\/2400\/0101", "action": 0,
"online": 0,
"esl_battery": 3114,
"product_code": "6930982668223",
"created_at": "2023-02-27 11:27:52",
"updated_at": "2023-02-28 16:21:29",
"ap_code": "40:d6:3c:2d:22:07", "esltype_code": "ESL-21R"
}
]
```


3.9 Query esl count

Query esl count

3.9.1 HTTPS Request

GET api/{i_client_id}/esl/query_count

Query Parameters

Parameter	Status	Description
store_code	required	store's code
is_base64	optional	default is 0

sign	required	sign

3.9.2 Example request:

```
const url = new URL("https://localhost/api/default/esl/query_count"); let
params = {
"store_code": "001",
"is_base64": "0",
"sign": "80805d794841f1b4",
};
Object.keys(params).forEach(key => url.searchParams.append(key, par

let headers = {
"Accept": "application/json",
"Content-Type": "application/json",
}

fetch(url, {

method: "GET",
headers: headers,

})

.then(response => response.json())
.then(json => console.log(json));
```

3.9.3 Example response (200):


```
{
"online_count": 0,
"offline_count": 2
}
```


3.10 Query some Esl's Information

3.10.1 HTTPS Request

POST api/{i_client_id}/esl/query_status

≡ Body Parameters

Parameter	Type	Status	Description
store_code	required	optional	store's code
f1	which	optional	page
f2	size	optional	in one page
f3	array	required	esl_codes
is_base64	default	optional	is 0
sign	required	optional	sign

3.10.2 Example request:

NAV

```
const url = new URL("https://localhost/api/default/esl/query_status");

 let headers = {
"Content-Type": "application/json", "Accept": "application/json",
 }

 let body = {
"store_code": "001",
 "f1": "1",
 "f2": "10",
"f3": "[\"54200001\", \"54200002\"]",
"is_base64": "0",
"sign": "80805d794841f1b4"
 }

 fetch(url, {
method: "POST", headers: headers, body: body
 })
.then(response => response.json())
.then(json => console.log(json));
```

3.10.3 Example response (200):

```
 {
 "error_code": 1,
"error_msg": "default missing store_code field"
 }
```

4 NFC GROUP

4.1 Query the NFC's Information

4.1.1 HTTPS Request

GET api/{i_client_id}/nfc/query

Query Parameters

Parameter	Status	Description
store_code	required	store's code
f1	optional	which page
f2	optional	size in one page
is_base64	optional	default is 0
sign	required	sign

4.1.2 Example request:

```
const url = new URL("https://localhost/api/default/nfc/query"); let params =
{
"store_code": "001",
 "f1": "1",
 "f2": "10",
"is_base64": "0",
"sign": "80805d794841f1b4",
  };
Object.keys(params).forEach(key => url.searchParams.append(key, par

let headers = {
"Accept": "application/json",
"Content-Type": "application/json",
```

NAV

```
}

fetch(url, {
    method: "GET",
    headers: headers,
})
    .then(response => response.json())
    .then(json => console.log(json));
```

4.1.3 Example response (200):

```
[]
```

4.2 Query nfc count

≡ Query nfc count

NAV

4.2.1 HTTPS Request

≡ GET api/{i_client_id}/nfc/query_count

NAV

Query Parameters

Parameter	Status	Description
store_code	required	store's code
is_base64	optional	default is 0
sign	required	sign

4.2.2 Example request:

```
const url = new URL("https://localhost/api/default/nfc/query_count"); let
params = {
 "store_code": "001",
 "is_base64": "0",
"sign": "80805d794841f1b4",
   };
Object.keys(params).forEach(key => url.searchParams.append(key, par

 let headers = {
 "Accept": "application/json",
 "Content-Type": "application/json",
  }

  fetch(url, {
method: "GET",
headers: headers,
  })
.then(response => response.json())
.then(json => console.log(json));
```

4.2.3 Example response (200):

```
{
"count": 0
}
```

4.3 refresh many nfcs with product info and template info

after doing it, the nfcs will be queued

4.3.1 HTTPS Request

POST api/{i_client_id}/nfc/direct

Body Parameters

Parameter	Type	Status	Description
store_code	string	required	store's code
f1	array	required	products array
is_base64	string	optional	default is 0
sign	string	required	sign

4.3.2 Example request:

```
const url = new URL("https://localhost/api/default/nfc/direct"); let headers ={
"Content-Type": "application/json", "Accept": "application/json",
}

let body = {
"store_code": "001",
"f1": "[{\"nfc_code\":\"54200001\",\"template_id\":11,\"product\":{
"is_base64": "0",
"sign": "80805d794841f1b4"
```

```
    }

    fetch(url, {
  method: "POST", headers: headers,
```

NAV

```
    body: body
})
    .then(response => response.json())
    .then(json => console.log(json));
```

4.3.3 Example response (200):

```
{
"error_code": 1,
"error_msg": "default missing store_code field"
}
```

5 OFFICEGROUP

5.1 Create a visitor's information

you can use this api to create a visitor's information.

5.1.1 HTTPS Request

POST api/{i_client_id}/of/create_visitor

Body Parameters

Parameter	Type	Status	Description
store_code	string	required	store's code
code	string	required	visit code
name	string	required	visitor's name
company	string	optional	visitor's company
department	string	optional	visitor's department
job	string	optional	visitor's job
mobile	string	required	visitor's mobile
email	string	optional	visitor's email
card_no	string	optional	visitor's job
receptionist	string	optional	receptionist's name
receptionist_mobile	string	optional	s receptionist's mobile
receptionist_department	string	optional	receptionist's department

☰

Parameter	Type	Status	Description
started_at	string	optional	visitor's start time
ended_at	string	optional	visitor's end time
content	string	optional	visit matters
is_base64	string	optional	default is 0
sign	string	required	sign

NAV

5.1.2 Example request:

```
const url = new URL("https://localhost/api/default/of/create_visitor"); let headers = {
"Content-Type": "application/json", "Accept": "application/json",
}

let body = {
"store_code": "002",
"code": "202201010001",
"name": "Jack",
"company": "Huawei",
"department": "Develop DEP", "job": "Engineer",
"mobile": "189xxxxxxxx", "email": "xxxx@xxxxx.com",
"card_no": "320520XXXXXXXXXXXXXX",
"receptionist": "John",
"receptionist_mobile": "139xxxxxxxx",
"receptionist_department": "Financial DEP", "started_at": "2023-01-01:09:30",
"ended_at": "2023-01-01:15:30",
"content": "Work's Content", "is_base64": "0",
"sign": "80805d794841f1b4"
}

fetch(url, {
method: "POST", headers: headers, body: body
})
.then(response => response.json())
.then(json => console.log(json));
```

NAV

5.1.3 Example response (200):

```
{
 "error_code": 1,
"error_msg": "default missing store_code field"
}
```

5.2 Delete a visitor's information

you can use this api to delete a visitor's information

5.2.1 HTTPS Request

POST api/{i_client_id}/of/del_visitor

Body Parameters

Parameter	Type	Status	Description
store_code	string	required	store's code
code	string	required	visit code
is_base64	string	optional	default is 0
sign	string	required	sign

5.2.2 Example request:

```
const url = new URL("https://localhost/api/default/of/del_visitor"); let headers = {
"Content-Type": "application/json", "Accept": "application/json",
}
```

```
let body = {
"store_code": "002",
"code": "202201010001",
"is_base64": "0",
"sign": "80805d794841f1b4"
}

fetch(url, {
method: "POST",
```

```
  headers: headers, body: body
  })
.then(response => response.json())
.then(json => console.log(json));
```

5.2.3 Example response (200):

```
{
"error_code": 1,
"error_msg": "default missing store_code field"
}
```

5.3 Create a user's information

you can use this api to create a user's information.

☰

5.3.1 HTTPS Request

POST api/{i_client_id}/of/create_user

Body Parameters

Parameter	Type	Status	Description
store_code	string	required	store's code
code	string	required	user code
name	string	required	user's name
company	string	optional	user's company
department	string	optional	user's department
job	string	optional	user's job
mobile	string	required	user's mobile
email	string	optional	user's email
type	string	optional	user's type
is_base64	string	optional	default is 0
sign	string	required	sign

5.3.2 Example request:

```
const url = new URL("https://localhost/api/default/of/create_user"); let headers
={
 "Content-Type": "application/json", "Accept": "application/json",
  }

 let body = {
 "store_code": "002",
"code": "A001",
"name": "Jack",
"company": "Huawei",
```

```
"department": "Develop DEP", "job": "Engineer",
 "mobile": "189xxxxxxxx", "email": "xxxx@xxxxx.com", "type": "0",
 "is_base64": "0",
"sign": "80805d794841f1b4"
  }

  fetch(url, {
method: "POST", headers: headers, body: body
  })
.then(response => response.json())
.then(json => console.log(json));
```

5.3.3 Example response (200):

NAV ☰


```
{
  "error_code": 1,
  "error_msg": "default missing store_code field"
}
```


5.4 Delete a visitor's information

you can use this api to delete a visitor's information

5.4.1 HTTPS Request

POST api/{i_client_id}/of/del_user

Body Parameters

Parameter	Type	Status	Description
store_code	string	required	store's code
code	string	required	visit code
is_base64	string	optional	default is 0
sign	string	required	sign

5.4.2 Example request:

```
const url = new URL("https://localhost/api/default/of/del_user"); let headers ={
"Content-Type": "application/json", "Accept": "application/json",
  }

 let body = {
"store_code": "002",
"code": "A001",
"is_base64": "0",
"sign": "80805d794841f1b4"
  }

  fetch(url, {
method: "POST", headers: headers, body: body
  })
.then(response => response.json())
.then(json => console.log(json));
```

5.4.3 Example response (200):


```
{
 "error_code": 1,
"error_msg": "default missing store_code field"
}
```

6 PRODUCT GROUP

6.1 Create a Product

when the product code exists in system already, It's will be updated.

6.1.1 HTTPS Request

POST api/{i_client_id}/product/create

Body Parameters

Parameter	Type	Status	Description
store_code	string	optional	store's code
pi	string	optional	product's inner_code
pc	string	required	product's code
pn	string	required	product's name
ps	string	optional	product's spec
pg	string	optional	product's grade
pu	string	optional	product's unit
pp	string	required	product's price
vp	string	optional	product's vip price
pop	string	optional	product's origin price

NAV

Parameter	Type	Status	Description
po	string	optional	product's origin
pm	string	optional	product's manufacturer
promotion	product's	optional	scene
pim	string	optional	product's image
pqr	string	optional	product's qrcode
f1	string	optional	custom field 1
f2	string	optional	custom field 2
f3	string	optional	custom field 3
f4	string	optional	custom field 4
f5	string	optional	custom field 5
f6	string	optional	custom field 6
f7	string	optional	custom field 7
f8	string	optional	custom field 8
f9	string	optional	custom field 9
f10	string	optional	custom field 10
f11	string	optional	custom field 11
f12	string	optional	custom field 12
f13	string	optional	custom field 13
f14	string	optional	custom field 14
f15	string	optional	custom field 15
f16	string	optional	custom field 16

Parameter	Type	Status	Description
extend	array	optional	optional extend field
is_base64	string	optional	default is 0
sign	string	required	sign

6.1.2 Example request:

```
const url = new URL("https://localhost/api/default/product/create"); let headers ={
"Content-Type": "application/json", "Accept": "application/json",
}

let body = {
"store_code": "001",
"pi": "38100001",
```

NAVI

Parameter	Type	Status	Description


```
"pc": "6943093201838",
"pn": "apple",
"ps": "xxxx",
"pg": "xxxx",
"pu": "xxxx",
"pp": "8.9",
"vp": "001",
"pop": "001",
"po": "China",
"pm": "001",
"promotion": "1\/2\/3\/4", "pim": "001",
"pqr": "001",
"f1": "xxx",
"f2": "xxx",
"f3": "xxx",
"f4": "xxx",
"f5": "xxx",
"f6": "xxx",
"f7": "xxx",
"f8": "xxx",
"f9": "xxx",
"f10": "xxx",
"f11": "xxx",
"f12": "xxx",
"f13": "xxx",
"f14": "xxx",
"f15": "xxx",
"f16": "xxx",
"extend": "{\"e001\":\"v11\", \"e002\":\"v12\", \"e003\":\"v13\", \
"is_base64": "0",
"sign": "80805d794841f1b4"
}
```


```
fetch(url, {
method: "POST", headers: headers, body: body
})
then(response => response.json())
then(json => console.log(json));
```

☰ Parameter Type Status Description

6.1.1 Example response (200):

```
{
 "error_code": 1,
"error_msg": "default missing store_code field"
}
```

6.2 Create many products

you can use this api to create some products one time.

6.2.1 HTTPS Request

POST api/{i_client_id}/product/create_multiple

Body Parameters

Parameter	Type	Status	Description
store_code	string	required	store's code
f1	array	required	products array
is_base64	string	optional	default is 0
sign	string	required	sign

6.2.2 Example request:

Parameter	Type	Status	Description

```
const url = new URL("https://localhost/api/default/product/create_multip let
headers = {
"Content-Type": "application/json", "Accept": "application/json",
}

let body = {
"store_code": "001",
"f1": "[{\"pc\": \"010901\", \"pn\":\"red apple\",\"pp\":56.8}, {\"
"is_base64": "0",
"sign": "80805d794841f1b4"
}

fetch(url, {
method: "POST", headers: headers, body: body
})
```

NAV ☰

```
    .then(response => response.json())
    .then(json => console.log(json));
```

6.2.3 Example response (200):

```
{
 "error_code": 1,
"error_msg": "default missing store_code field"
}
```

6.3 Create many products with defined ap code

you can use this api to create some products one time.

6.3.1 HTTPS Request

POST api/{i_client_id}/product/create_multiple_with_ap

Body Parameters

Parameter	Type	Status	Description
old_store_code	string	required	store's code
new_store_code	string	required	store's code
f1	array	required	products array
is_base64	string	optional	default is 0
f2	string	required	ap code
sign	string	required	sign

6.3.2 Example request:

```
const url = new URL("https://localhost/api/default/product/create_multip let
headers = {
"Content-Type": "application/json", "Accept": "application/json",
}

let body = {
"old_store_code": "001",
"new_store_code": "002",
"f1": "[{\"pc\": \"010901\", \"pn\":\"red apple\",\"pp\":56.8}, {\"
"is_base64": "0",
"f2": "40:d6:3c:5e:11:63", "sign": "80805d794841f1b4"
}

fetch(url, {
method: "POST", headers: headers, body: body
})
.then(response => response.json())
```

```
.then(json => console.log(json));
```

6.3.3 Example response (200):

```
{
"error_code": 1,
"error_msg": "default missing old_store_code field"
}
```

≡6.4 Delete product multiple

you can use this api to delete some products, if this product is bind with esl, the esl will be unbind.

6.4.1 HTTPS Request

POST api/{i_client_id}/product/del_multiple

Body Parameters

Parameter	Type	Status	Description
store_code	string	required	store's code
f1	array	required	products array
is_base64	string	optional	default is 0
sign	string	required	sign

6.4.2 Example request:

```
const url = new URL("https://localhost/api/default/product/del_multiple" let headers ={
"Content-Type": "application/json", "Accept":  "application/json",
  }

 let body = {
"store_code": "001",
```

NAV

```
    "f1": "[\"69xxxxxxxx\", \"69yyyyyyyy\"]",
    "is_base64": "0",
    "sign": "80805d794841f1b4"
}

fetch(url, {
    method: "POST",
    headers: headers,
    body: body
})
    .then(response => response.json())
    .then(json => console.log(json));
```

6.4.3 Example response (200):

```
{
"error_code": 1,
"error_msg": "default missing store_code field"
}
```

6.5 Query product count

Query product count

6.5.1 HTTPS Request

GET api/{i_client_id}/product/query_count

Query Parameters

Parameter	Status	Description

store_code	required	store's code
is_base64	optional	default is 0
sign	required	sign

6.5.2 Example request:

```
const url = new URL("https://localhost/api/default/product/query_count") let
params = {
 "store_code": "001",
 "is_base64": "0",
"sign": "80805d794841f1b4",
  };
Object.keys(params).forEach(key => url.searchParams.append(key, par

 let headers = {
 "Accept": "application/json",
 "Content-Type": "application/json",
  }

  fetch(url, {
method: "GET",
headers: headers,
  })
.then(response => response.json())
.then(json => console.log(json));
```

6.5.3 Example response (200):

```
  {
"count": 6551
  }
```

6.6 Query the Product's Information

6.6.1 HTTPS Request

GET api/{i_client_id}/product/query

Query Parameters

Parameter	Status	Description
store_code	required	store's code
f1	optional	which page
f2	optional	size in one page
is_base64	optional	default is 0
sign	required	sign

6.6.2 Example request:

```
const url = new URL("https://localhost/api/default/product/query"); let
params = {
"store_code": "001",
 "f1": "1",
 "f2": "10",
"is_base64": "0",
"sign": "80805d794841f1b4",
  };
Object.keys(params).forEach(key => url.searchParams.append(key, par

 let headers = {
"Accept": "application/json",
"Content-Type": "application/json",
 }

 fetch(url, {
```

NAV

```
    method: "GET",
    headers: headers,
})
    .then(response => response.json())
    .then(json => console.log(json));
```

6.6.3 Example response (200):


```
[
{
"id": 432679,
"product_code": "6943093201838",
"product_inner": "38100001", "product_name": "apple",
"product_spec": "xxxx",
"product_grade": "xxxx", "product_price": "8.90", "product_unit": "xxxx",
"product_origin_price": "1.00",
"product_mfrs": "001",
"product_origin": "China", "product_desc": "备注",
"product_image": "001",
"product_image_code": null, "product_qrcode": "001",
"enabled": 1,
"promotion": 1,
"created_at": null,
"updated_at": "2023-01-11 15:29:20",
"product_storage": 0,
"product_storage_threshold": 10,
"product_vip_price": "1.00",
"product_sales_price": "0.00", "product_sale_type": null,
"start_date": null,
"end_date": null,
"start_time": null,
```

NAV

"end_time": null, "field1": "xxx",
"field2": "xxx",
"field3": "xxx",
"field4": "xxx",
"field5": "xxx",
"field6": "xxx",
"field7": "xxx",
"field8": "xxx",
"field9": "xxx",
"field10": "xxx",
"field11": "xxx",
"field12": "xxx",
"field13": "xxx",
"field14": "xxx",
"field15": "xxx",
"field16": "xxx",
"users_username": null, "store_code": "001",
"product_display": null, "image": null,
"group": null,
"video": null,
"video_code": null, "is_advert": null, "keywords": null, "extend": {
"v1": "v11",
"v2": "v12",
"v3": "v13",
"v4": "v14",
"v5": "v15",
"v6": "v16",
"v7": "v17",
"v8": "v18"
},
"product_from": null,
"field17": null,
"field18": null,

7 STORE GROUP

7.1 Create a Store

when the store code exists in system already, It's will be updated

7.1.1 HTTPS Request

POST api/{i_client_id}/store/create

Body Parameters

Parameter	Type	Status	Description

store_code	string	required	store's code
f1	string	required	store's name
f2	string	optional	store's address
is_base64	string	optional	default is 0
sign	string	required	sign

7.1.2 Example request:

```
const url = new URL("https://localhost/api/default/store/create"); let headers =
{
"Content-Type": "application/json", "Accept": "application/json",
}

let body = {
"store_code": "001",
"f1": "vonluxe",
"f2": "20A, 2345 Belmont Avenue", "is_base64": "0",
```

```
    "sign": "80805d794841f1b4"
}

fetch(url, {
method: "POST", headers: headers, body: body
  })
.then(response => response.json())
.then(json => console.log(json));
```

7.1.3 Example response (200):

```
{
"error_code": 1,
"error_msg": "default missing store_code field"
}
```

8 TEMPLATEGROUP

8.1 Query the Templates in store

8.1.1 HTTPS Request

GET api/{i_client_id}/template/query

Query Parameters

Parameter	Status	Description
store_code	required	store's code
f1	optional	which page
f2	optional	size in one page
is_base64	optional	default is 0

sign	required	sign

8.1.2 Example request:

```
const url = new URL("https://localhost/api/default/template/query"); let
params = {
"store_code": "001",
"f1": "1",
"f2": "10",
"is_base64": "0",
"sign": "80805d794841f1b4",
};
Object.keys(params).forEach(key => url.searchParams.append(key, par

let headers = {
"Accept": "application/json",
"Content-Type": "application/json",
}

fetch(url, {
method: "GET",
headers: headers,
})
.then(response => response.json())
.then(json => console.log(json));
```

8.1.3 Example response (200):

NAV


```
[
  {
  "id": 608,
  "esltype_code": "ESL-15BW",
"esltemplate_name": "Men's running shoes-bak", "esltemplate_default": 0
  },
  {
  "id": 609,
  "esltype_code": "ESL-15BW", "esltemplate_name": "KARELA",
"esltemplate_default": 0
  },
  {
  "id": 610,
"esltype_code": "ESL-15R", "esltemplate_name": "KARELA", "esltemplate_default":
0
  },
  {
  "id": 611,
"esltype_code": "ESL-75R", "esltemplate_name": "KAR", "esltemplate_default": 0
  },
  {
  "id": 623,
"esltype_code": "ESL-42R",
"esltemplate_name": "erwrwer", "esltemplate_default": 0
  },
  {
  "id": 624,
"esltype_code": "ESL-42R",
"esltemplate_name": "default-bak", "esltemplate_default": 1
  },
  {
  "id": 643,
"esltype_code": "ESL-75R",
}
  ]
```