
```
Promethes ,Grafana and Node_exporter
Ports number are
1)Promethes=9090
2)Grafana:-3000
3)Node_exporter:- 9100
monitoring applications..
node exports 9090 port
promethes 9100 port (data source) pomql
grafana human readble form for more easier data understanding
promethes 9100 port (data source)
pomql query language. to query on grafan..
node export is some what same as anisble
but here node sends data to master
we need to install nodeexporter on each
node and master also ...
promethes 9100
data flow .....
node export
promethes
  1
grafna
```

first make 1 master and 2 nodes

1 for master install node\_export,promethes,grafana

2 nodes launch and install node\_exporter on it .. run 2 query..

All 3 instance should have a security group in which port 9090,3000,9100,22,80,443 are in inbound

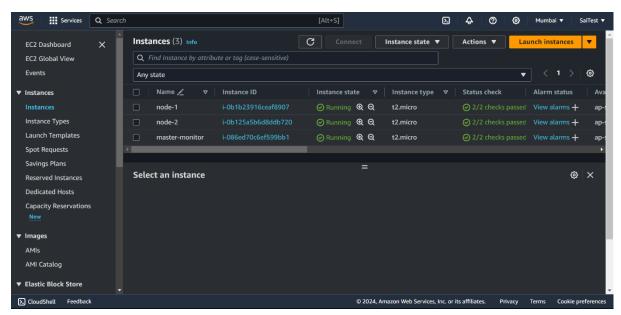

#### Go in master install

1) Promethes from link
Link :- https://www.fosstechnix.com/how-to-install-prometheus-on-ubuntu-20-04-lts/

Run all 12 steps as which are given below

2) Change the files /etc/promethes/promethes.yml /etc/prometheus/prometheus.yml

# my global config/etc/prometheus global:

scrape\_interval: 15s # Set the scrape interval to every 15 seconds. Default is every 1 minute.

evaluation\_interval: 15s # Evaluate rules every 15 seconds. The default is every 1 minute. # scrape\_timeout is set to the global default (10s).

# Alertmanager configuration alerting:

alertmanagers:

- static\_configs:

- targets:

# - alertmanager:9093

# Load rules once and periodically evaluate them according to the global 'evaluation interval'.

rule\_files:

# - "first\_rules.yml"

# - "second\_rules.yml"

# A scrape configuration containing exactly one endpoint to scrape:

# Here it's Prometheus itself.

scrape\_configs:

# The job name is added as a label `job=<job\_name>` to any timeseries scraped from this config.

- job\_name: 'prometheus'

# metrics\_path defaults to '/metrics' # scheme defaults to 'http'.

static\_configs:

- targets: ['localhost:9090', 'localhost:9100']


- job\_name: "remote\_collector"

scrape\_interval: 10s

static\_configs:

- targets: ["13.201.16.12:9100", "3.111.157.92:9100"] ### these are public ips of node-1

### and node-2

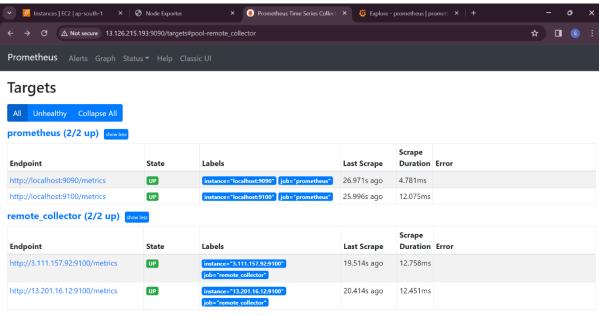

3) Install node export from official document

Link :- https://www.fosstechnix.com/install-prometheus-node-exporter-on-linux/

These steps should be executed properly

And the file should be modify properly which is **sudo vim**/etc/systemd/system/node\_exporter.service

sudo vim /etc/systemd/system/node\_exporter.service

[Unit]

Description=Node Exporter Wants=network-online.target After=network-online.target

[Service]

User=node\_exporter

Group=node\_exporter

Type=simple

Restart=always

RestartSec=10s

ExecStart=/usr/local/bin/node\_exporter

- --collector.mountstats \
- --collector.logind \
- --collector.processess \
- --collector.ntp \
- --collector.systemd \
- --collector.tcpstat \
- --collector.wifi \

[Install]

WantedBy=multi-user.target

Now we should go in node-1 and node-2 and install node\_export same as above but not fully just do some steps which I have mention below

Link :- <a href="https://www.linode.com/docs/guides/how-to-install-prometheus-and-grafana-on-ubuntu/">https://www.linode.com/docs/guides/how-to-install-prometheus-and-grafana-on-ubuntu/</a>

# Refer from How to Install and Configure Node Exporter on the Client

- wget https://github.com/prometheus/node\_exporter/releases/download/v1.5.0/node\_export er-1.5.0.linux-amd64.tar.gz
- 2) tar xvfz node\_exporter-\*.tar.gz

- 3) sudo mv node\_exporter-1.5.0.linux-amd64/node\_exporter /usr/local/bin
- 4) rm -r node\_exporter-1.5.0.linux-amd64\*
- 5) node exporter
- 6) sudo useradd -rs /bin/false node\_exporter
- 7) sudo vi /etc/systemd/system/node\_exporter.service

[Unit]

Description=Node Exporter

Wants=network-online.target

After=network-online.target

[Service]

User=node\_exporter

Group=node\_exporter

Type=simple

Restart=on-failure

RestartSec=5s

ExecStart=/usr/local/bin/node\_exporter

[Install]

WantedBy=multi-user.target

:wq! Save it

- 8) sudo systemctl enable node\_exporter
- 9) sudo systemctl daemon-reload
- 10) sudo systemctl start node\_exporter
- 11) sudo systemctl status node\_exporter

http://local\_ip\_addr:9100 you can see node\_exporter

refers only till How to Configure Prometheus to Monitor Client Nodes


Now Go in Master

Intsall Grafana from official document

Link:- <a href="https://grafana.com/docs/grafana/latest/setup-grafana/installation/debian/">https://grafana.com/docs/grafana/latest/setup-grafana/installation/debian/</a>

Then check Grafana is working or not systemctl status grafana-server.service → to check systemctl start grafana-server.service → to start systemctl enable grafana-server.service → to enable


http:<ip-address>:3000 to go in Grafana

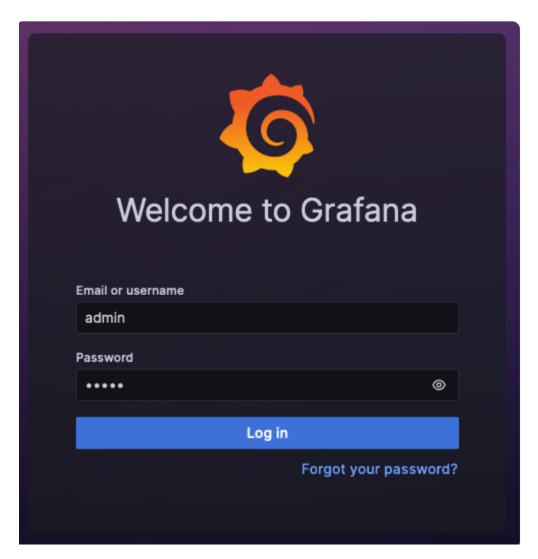


First time insert "admin" as username and password ...

And after that Grafana asks for password that we can set anything we want ....


## Home page of Grafana is

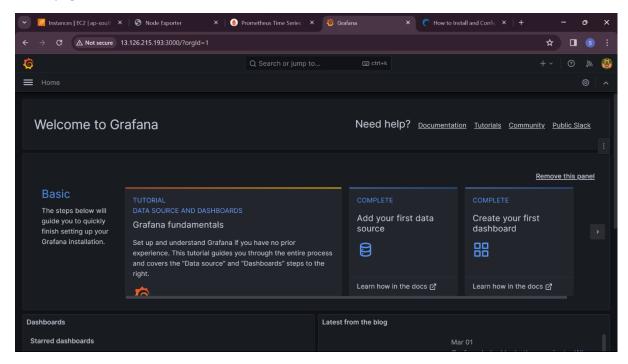


### Choose datasource

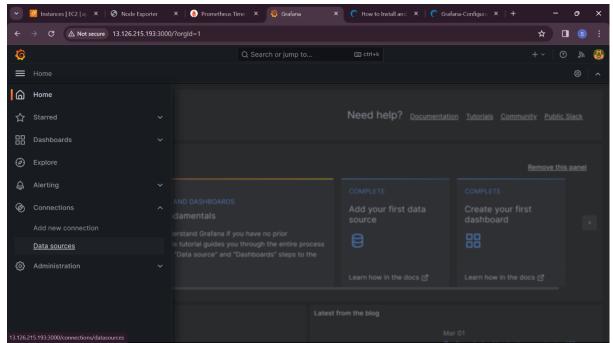


**Next choose Prometheus** 

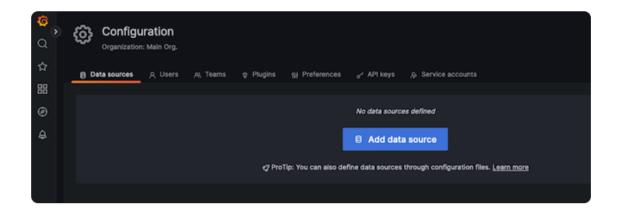

5. Choose Prometheus as the data source.

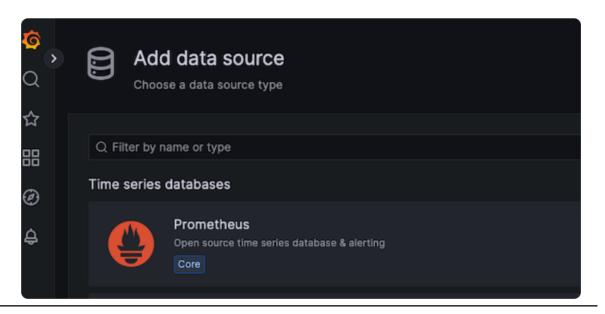


Enter Url for Promethes server

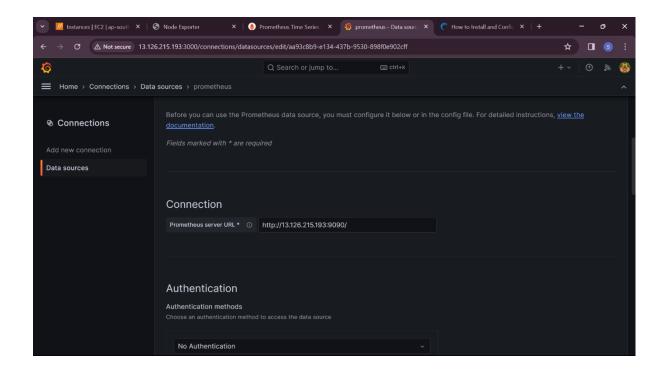


After that let all settings be default bro and click on save and test button

Now we can see our Grafana Dashboard... it is for our localhost means it is basically monitoring the Master .

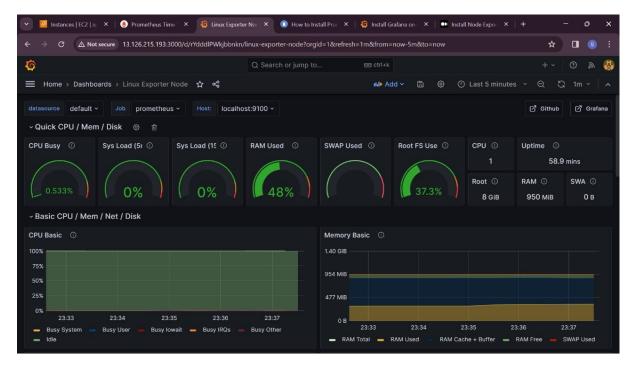


For seeing the node-1 and node-2 select the data source = Prometheus , job = remote-controller (name) ,


host: 13.201.16.12 (node-1 public ip), 3.111.157.92 (node-2 public ip)

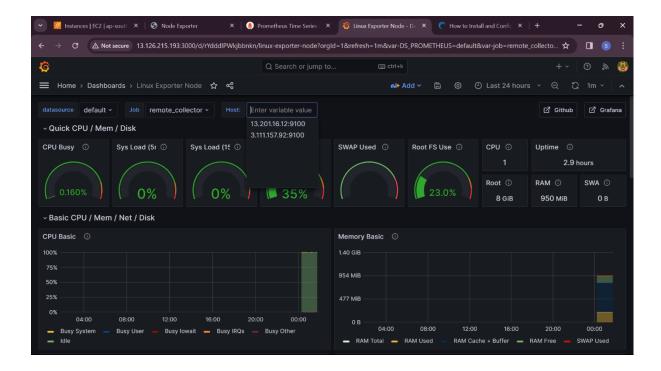


You can also run query in Grafana select Explore

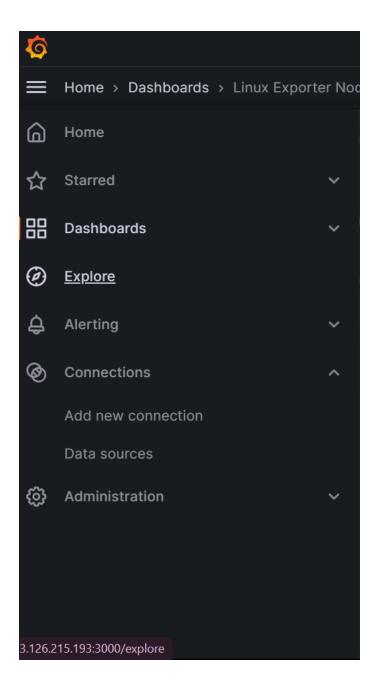

You can run any command using the Grafana metric eg cpu

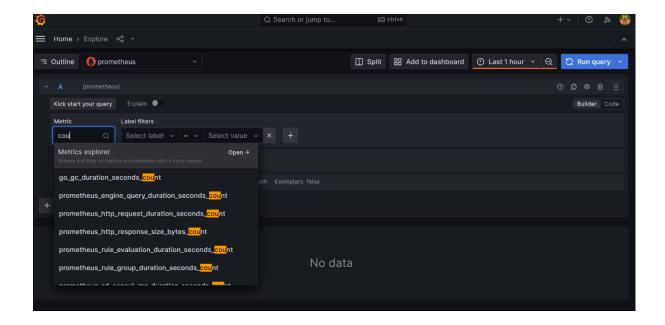

We can also run two commands parallely using spilt feature of Grafana

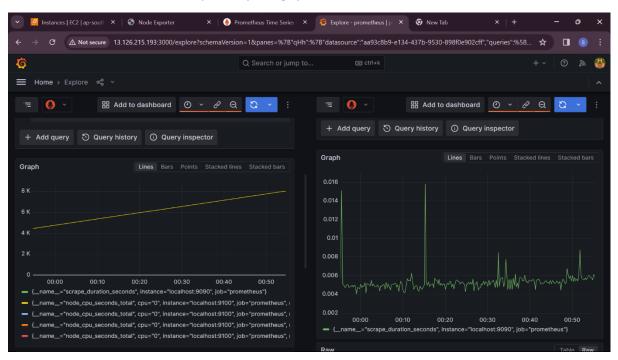

Left side is some disk command

right side is some cpu command

Important Tip:-

Link.