



Unencrypted Route

```
oc expose service service_name
```

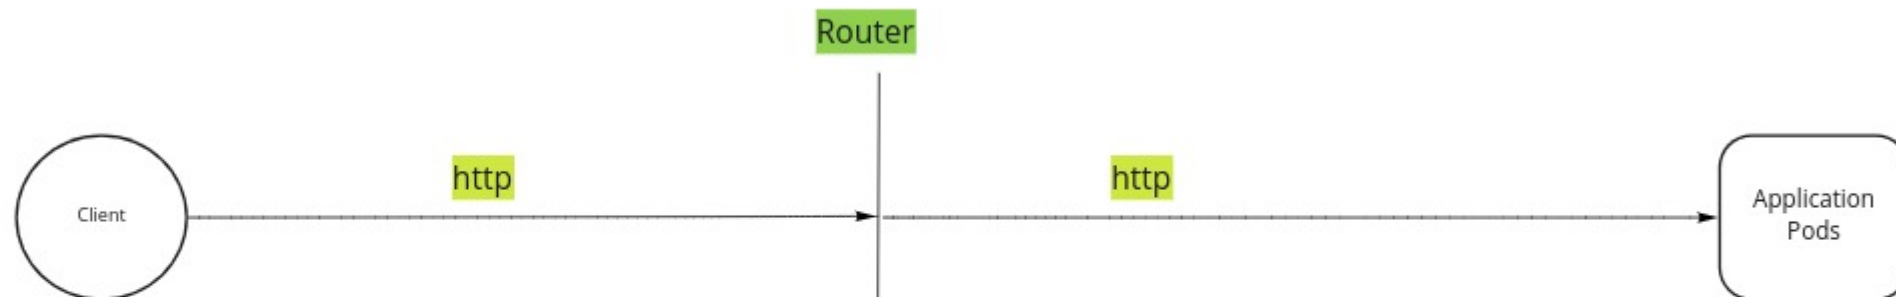

Edge Route

```
oc create route --service api-frontend  
--key api.key --cert api.crt
```

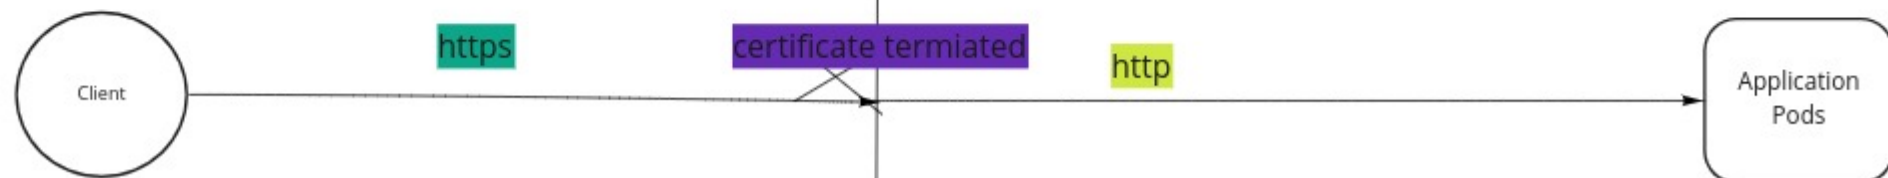

Passthrough Route

```
oc create route passthrough ROUTE_NAME  
--service SERVICE_NAME --port 8443
```



Reencrypt Route

```
oc create route reencrypt --service=frontend --  
cert=tls.crt --key=tls.key --dest-ca-  
cert=destca.crt --ca-cert=ca.crt --  
hostname=www.example.com
```

