
SecureShare — State Transition Diagram

This diagram models the lifecycle of a file in SecureShare, from selection and upload through scanning, availability, sharing, recovery, and deletion.

SecureShare — File State Transition Diagram

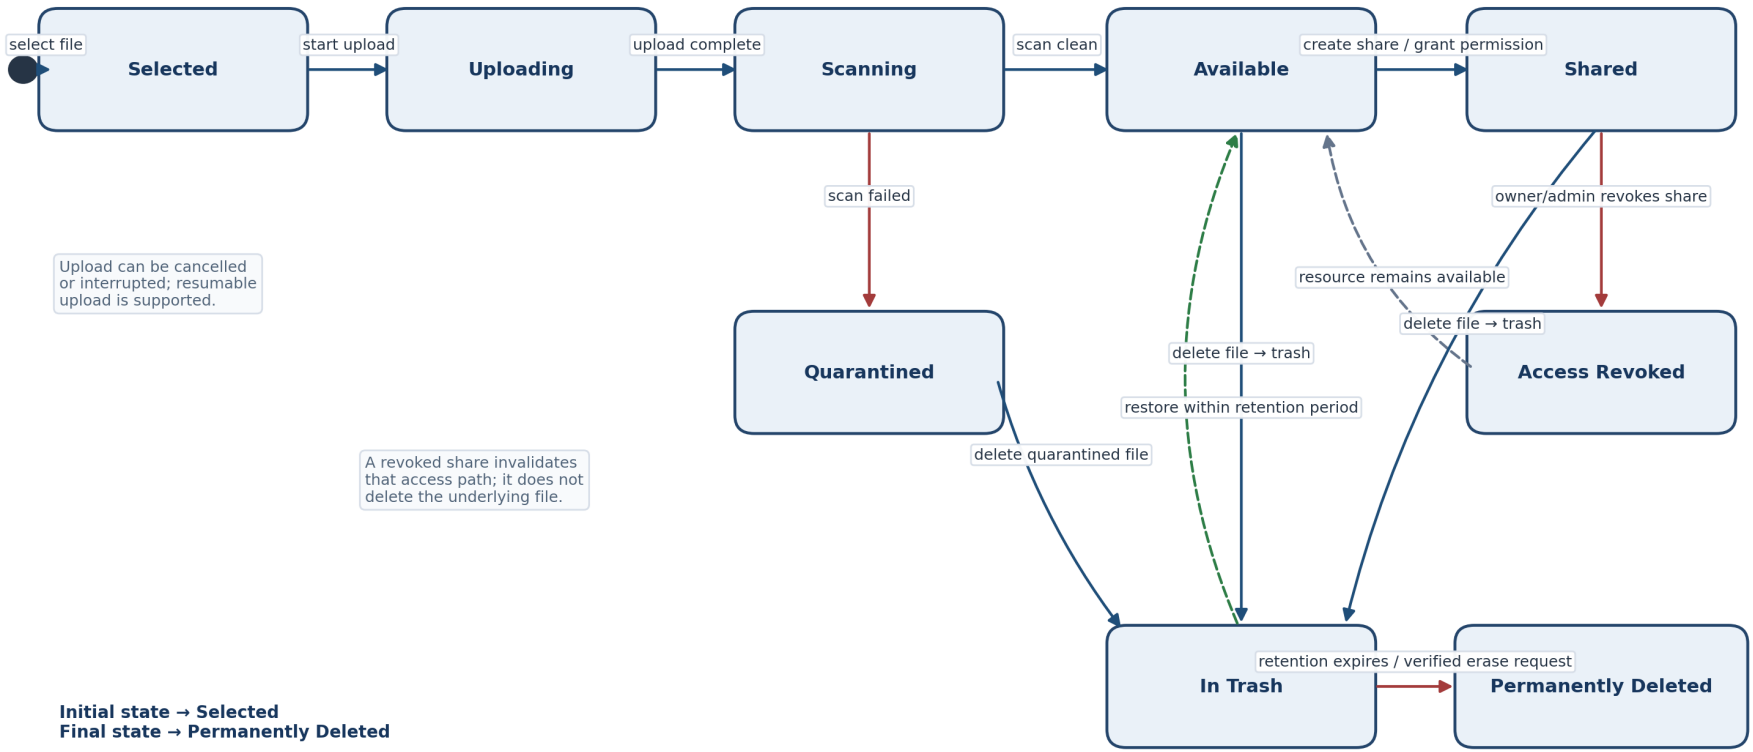

State and transition notes

• Selected → Uploading: the user starts an upload. The SRS supports upload cancellation and resumable uploads.

• Uploading → Scanning: the encrypted file upload completes and the system triggers malware scanning.

• Scanning → Available: the scan result is clean; the file becomes available to recipients.

• Scanning → Quarantined: the scan fails; the file is quarantined and is not made available.

• Available → Shared: the owner grants direct permission or creates a controlled sharing link.

• Shared → Access Revoked: the owner or administrator revokes a permission or link. The file itself remains stored; the revoked recipient loses that access path.

• Available / Shared / Quarantined → In Trash: a delete action moves the file into recoverable trash.

• In Trash → Available: an authorized user restores the file during the configured retention period (default 30 days).

• In Trash → Permanently Deleted: retention expires or a verified deletion request is processed; file content and key material are erased.

Modeling note: The SRS explicitly specifies clean-scan availability, failed-scan quarantine, sharing/revocation, recoverable trash, restoration, and permanent erasure. “Selected,” “Uploading,” and the combined file lifecycle are diagram-level abstractions used to connect those specified behaviors. Revoking a share is modeled separately from deleting a file because the SRS treats access revocation and file deletion as different operations.