

Updates to 3478-Creating Open Toolchains for IBM Bluemix

lab-0-getting-setup

1. Page 2 of 6 in lab
 - o Instructions say **DevOpsLabs**, screen shot shows **DevOpsLab**. Organization name must be unique in Bluemix. Use one of the suggested defaults, such as your Bluemix ID or eMail address and adjust accordingly throughout.

lab-1-read-template-paper

1. Page 1 of 5 in lab, Title should be **Lab 1**.

lab-2-create-order-toolchain-using-pre-built-template

1. Page 1 of 16 in lab, adjust org name.
2. Page 3 of 16 in lab, adjust org name.
3. Page 5 of 16 in lab, adjust org name.
4. Page 10 of 16 in lab, adjust org name.
5. Page 14/15 of 16 in lab, screenshot for step 24 is incorrect. Should be:




lab-3-create-catalog-toolchain-by-hand

1. Page 1 of 16 in lab, adjust org name.
2. Page 11 of 16, step 17, *Deploy* and *Functional Tests* are jobs.

lab-4-create-ui-toolchain-from-deployed-application

1. Page 2 of 8, step 3, adjust org name.
2. Page 4 of 8, step 5
 - If the *prod* space is not displayed in the upper right hand corner, click the upper-right hand corner account settings and select **prod** as the *Space*.

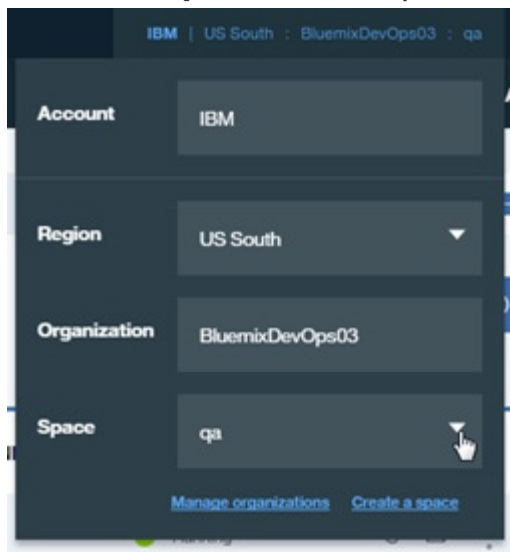

3. Page 6 of 8, step 4, click **Begin Import** to start the import.
4. Page 6 of 8, new step 5
 - Close the GitHub browser tab.
 - Close the Bluemix application dashboard browser tab.
 - On the Bluemix *Create a Toolchain* page, click the blue arrow to the left of *Toolchains* to return to the Toolchains.
5. Page 7 of 8, step 1
 - On the Bluemix *Create a Toolchain* page, click the blue arrow to the left of *Toolchains* to return to the Toolchains.
 - Click the just created Toolchain (*prod-ui-toolchain-lab-timestamp*).

lab-5-integrate-slack-and-pagerduty

1. Page 3 of 12, step 1



- You may have to click on the blue left arrows to display the Toolchains page
2. Page 3 of 12, step 2
- Click *simple-order-toolchain-timestamp*.