




12:39
Shorts
Subscriptions
Live
Lens
210
Dislike
37
Share
3.4 lakh
Use this sound
@HRplsHireMe
Subscribe
Accenture gaming test 20 Dec 2025
EEYUH! x Fluxxwave (Slowed + Reverb) · (
Home
Shorts
Subscriptions
You



2:44
04:31
494 KB/S
97
Shorts
Subscriptions
Live
Lens
215
Dislike
37
Share
3.4 lakh
3:59
Use this sound
@HRplsHireMe
Subscribe
Accenture gaming test 20 Dec 2025
JH! x Fluxxwave (Slowed + Reverb) · Clovi
Home
Shorts
Subscriptions
You


Question 1 of 3

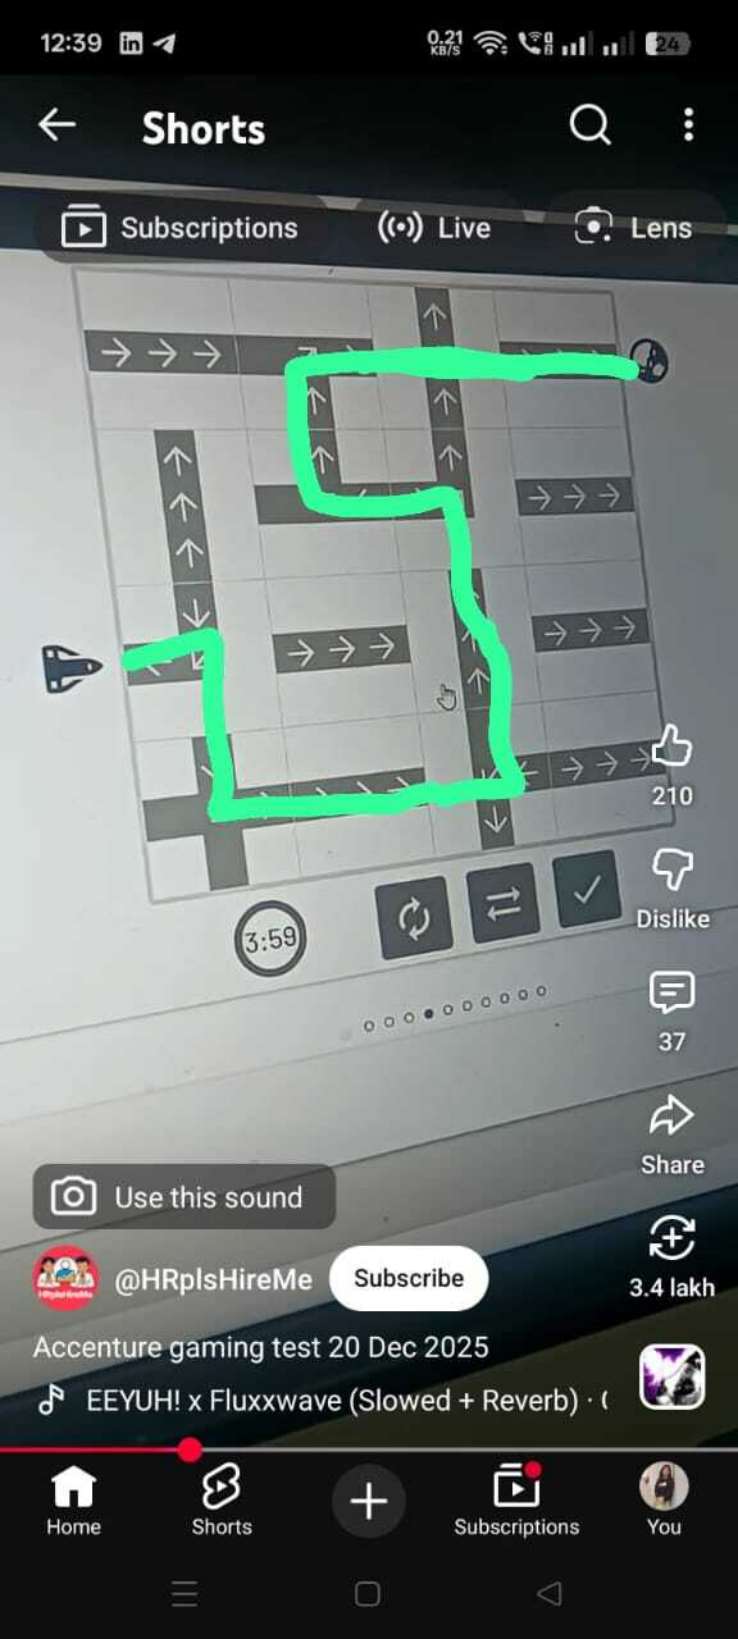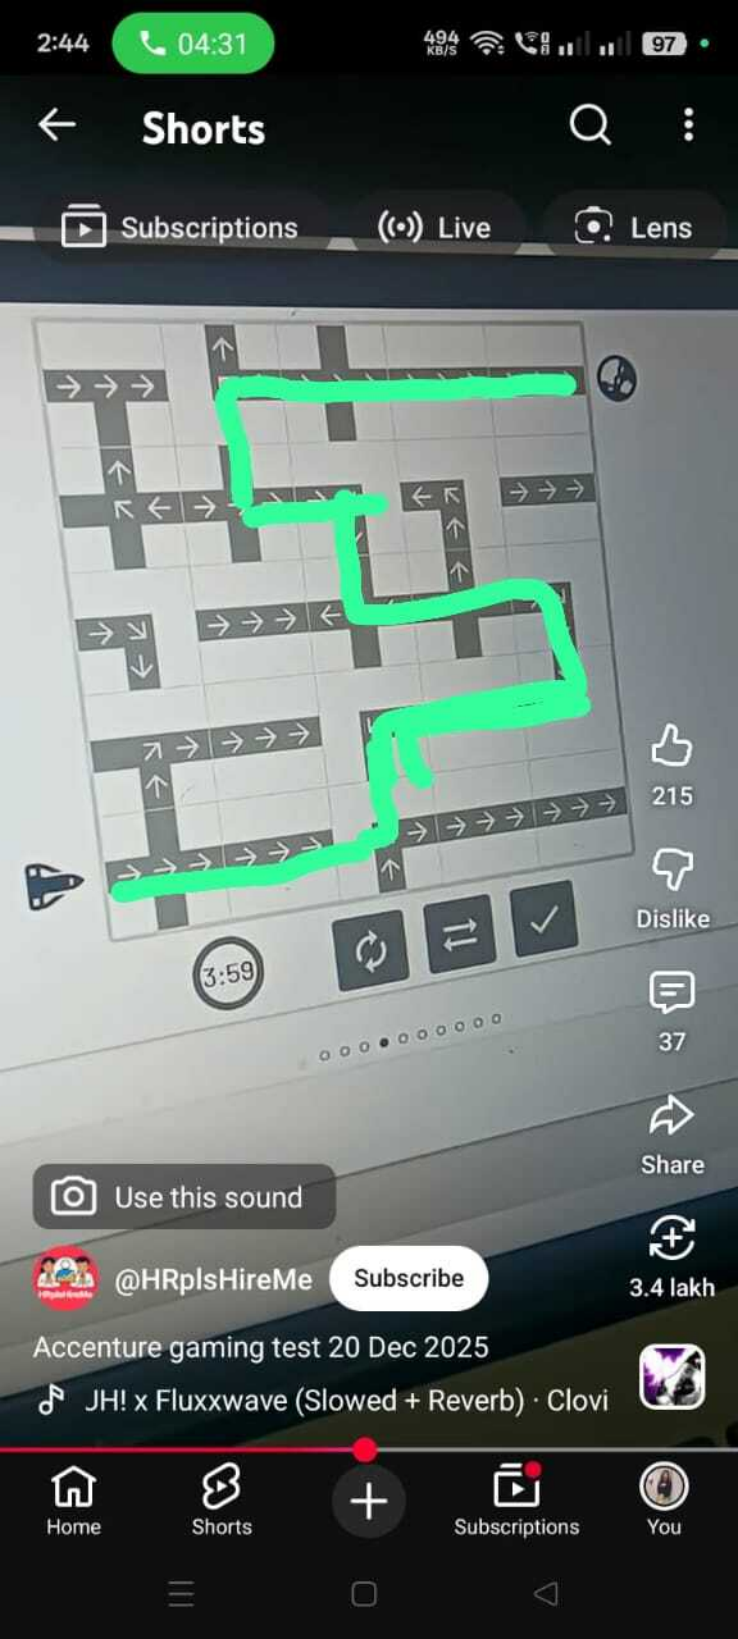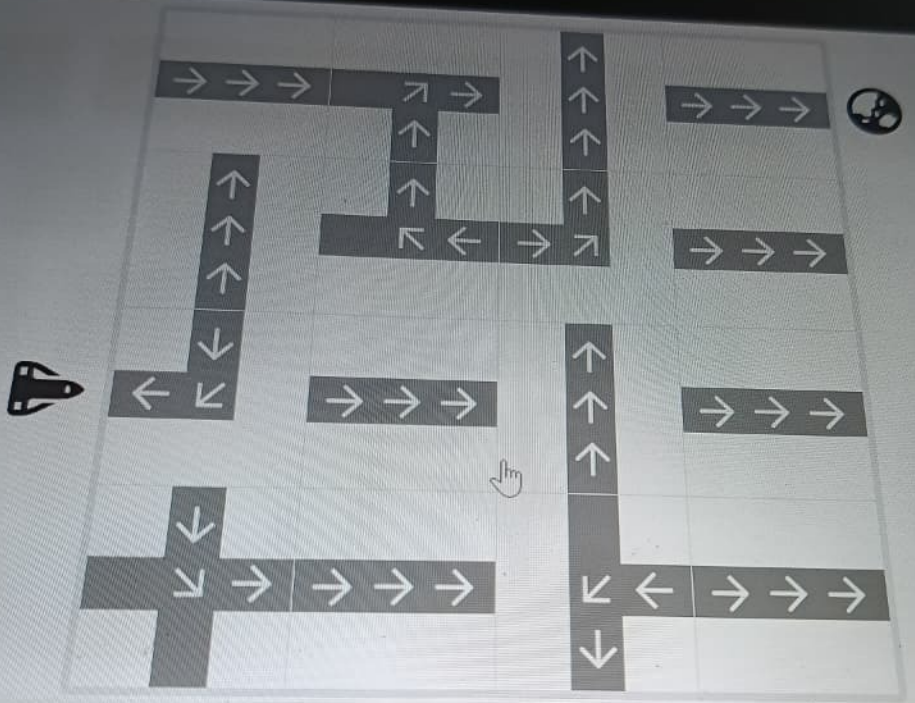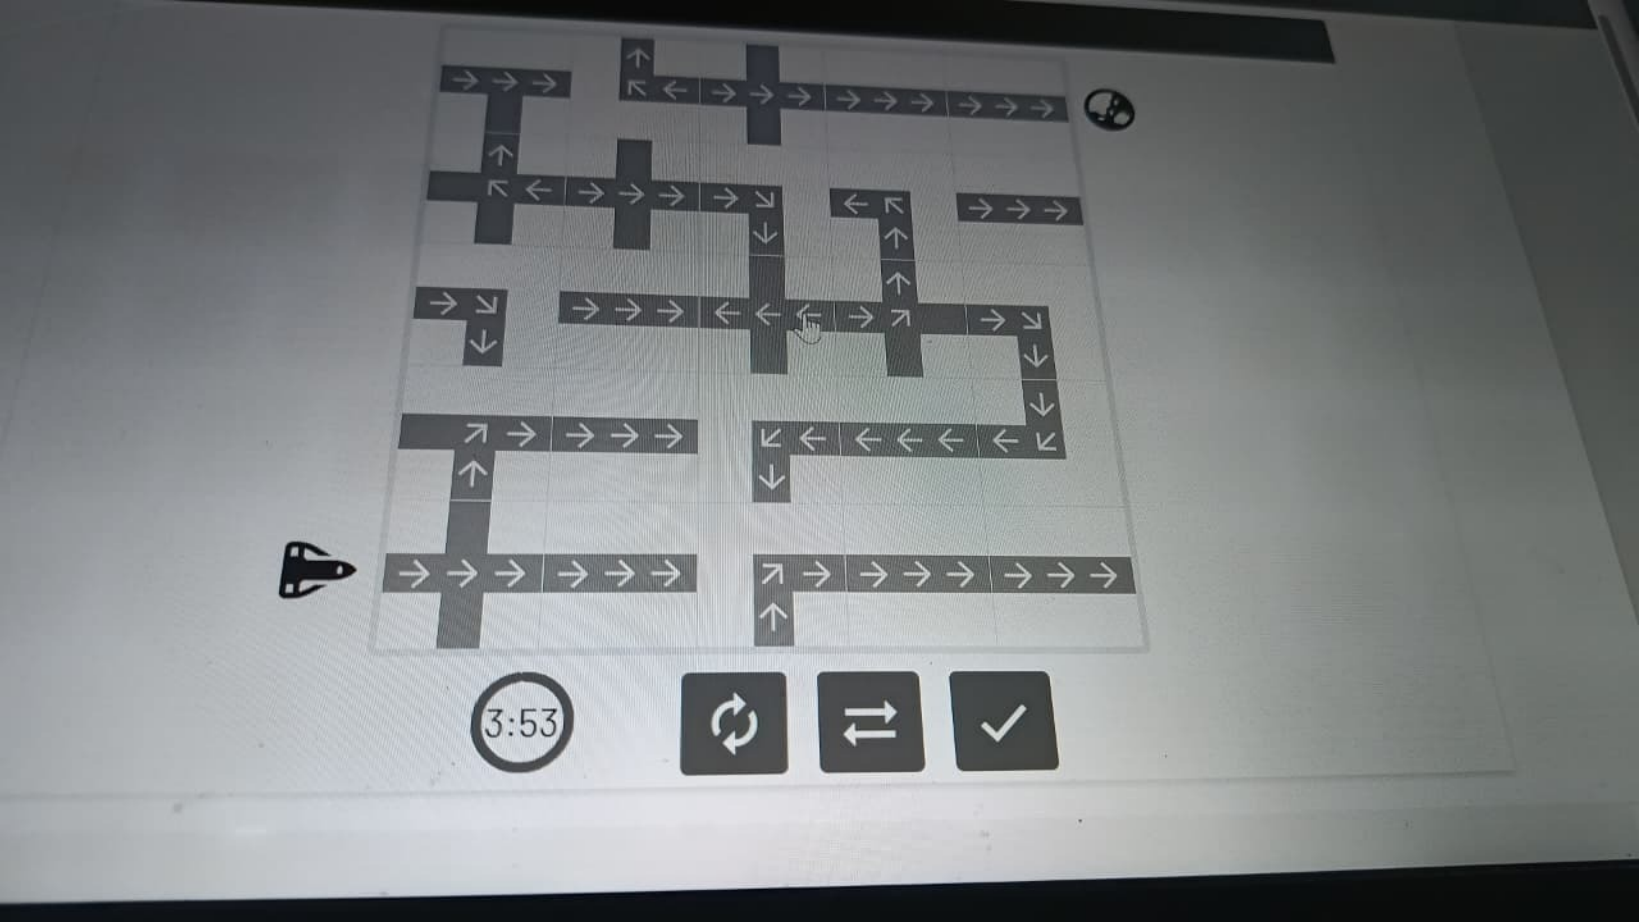



3:53

Question 3 of 3

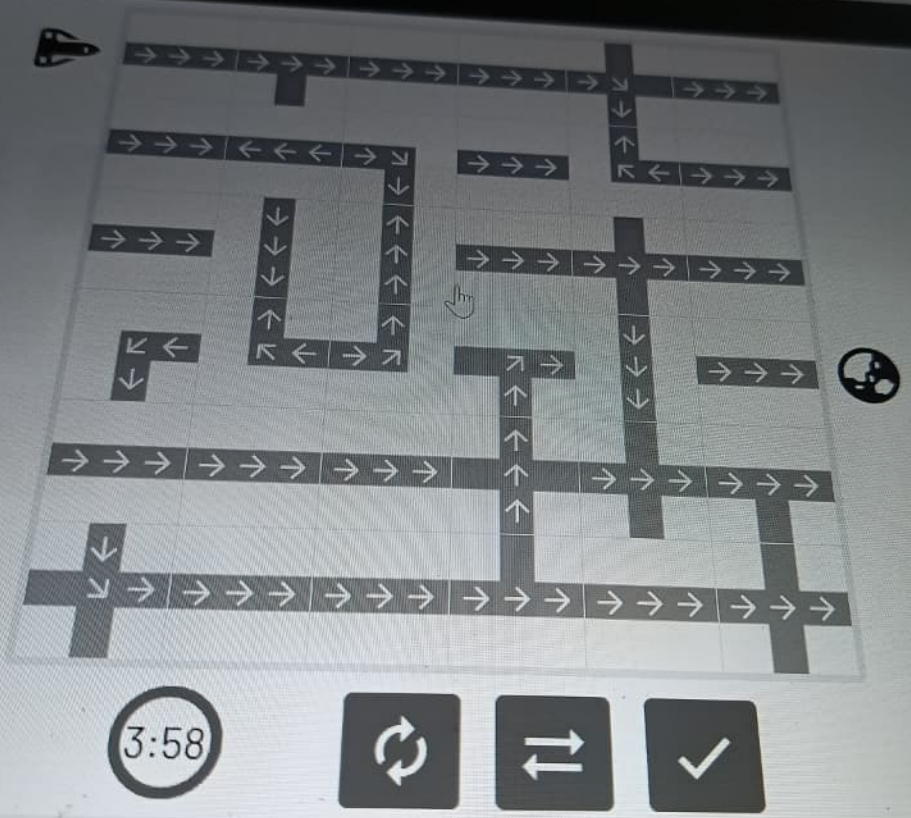

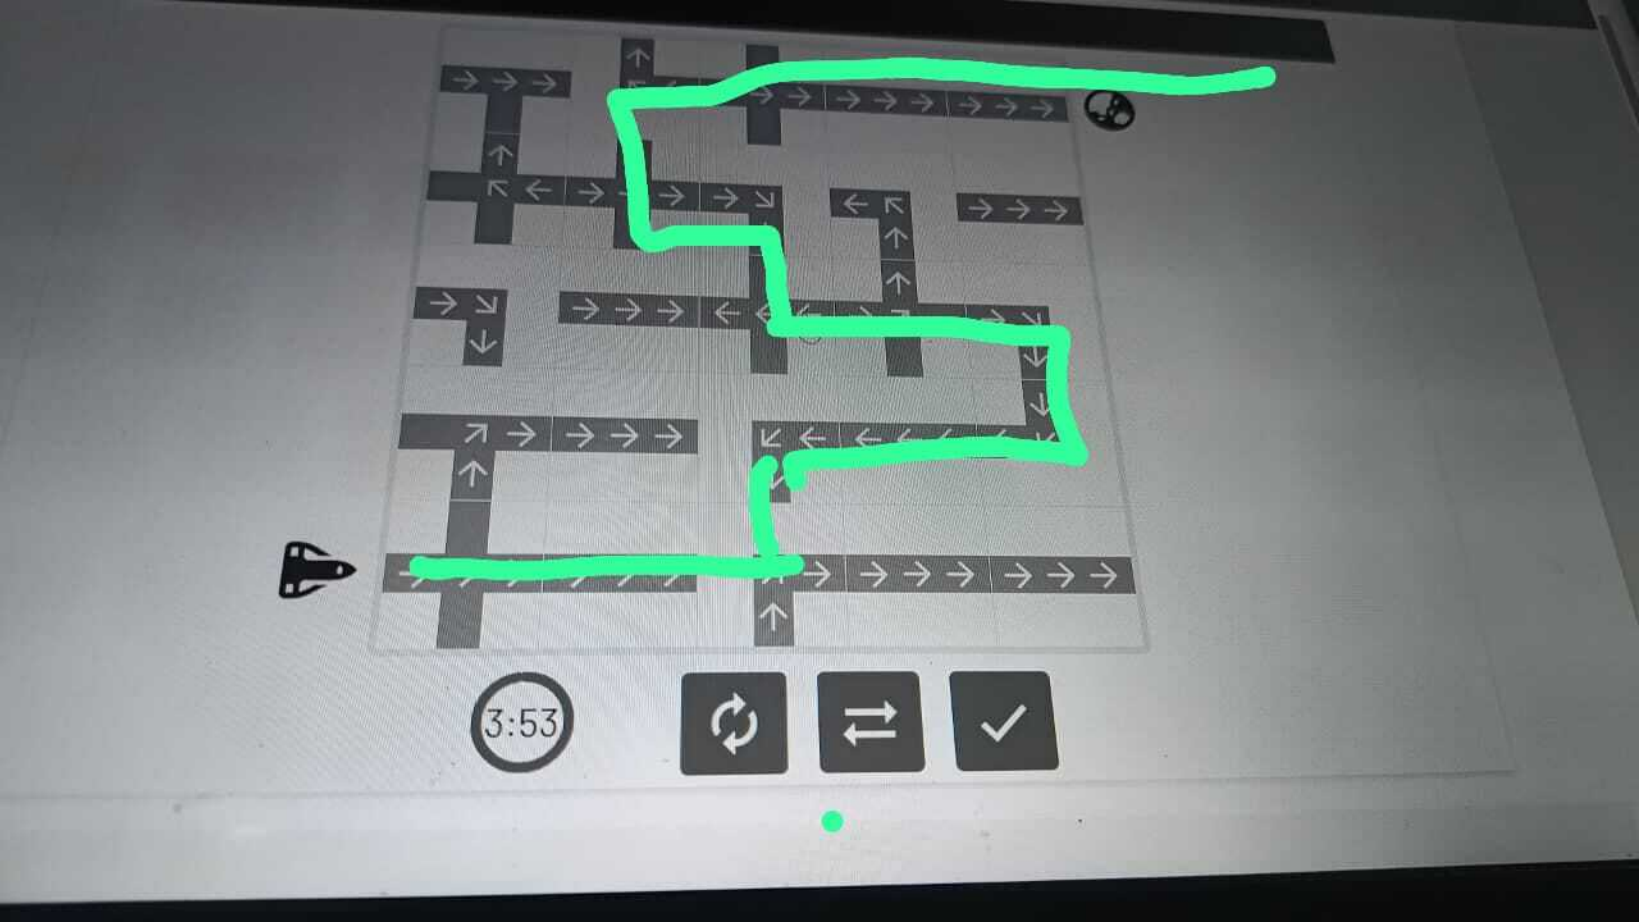
3:53

Question 1 of 3

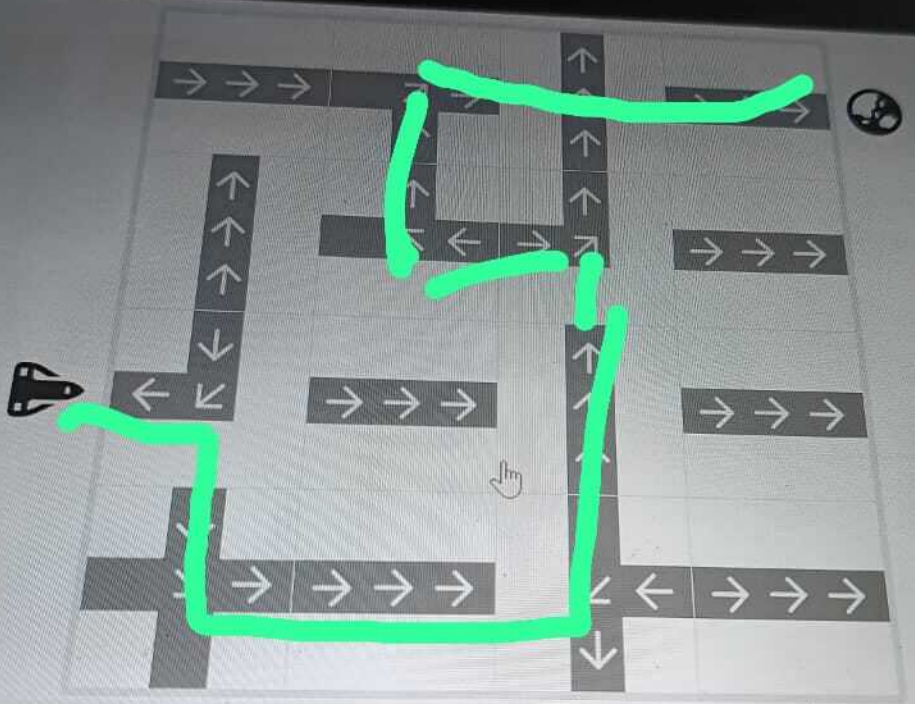

Question 2

Revisit Later

Your marketing lead requests a list of employees from the South region for an internal campaign. Which formula allows you to generate this list dynamically from the dataset?

	A	B	C	D	E	F	G	H
1	Employee	Name	Departme	Role	Salary	Bonus	Join Date	Region
2	E001	Alice	HR	Manager	55000	5000	15-01-2020	East
3	E002	Bob	Finance	Analyst	63000	6200	10-07-2019	West
4	E003	Charlie	IT	Engineer	72000	7000	22-03-2021	North
5	E004	David	Finance	Manager	68000	6400	05-11-2018	West
6	E005	Eva	HR	Executive	57000	5400	19-05-2022	East
7	E006	Farah	IT	Analyst	71000	6900	01-09-2020	North
8	E007	George	Marketing	Executive	52000	4800	11-12-2021	South
9	E008	Hina	Marketing	Manager	69000	6600	25-08-2017	South

Assume you are using Excel 365 or later, where dynamic array functions are supported.

Select an option

- =IF(H2:H9="South", B2:B9, "")
- =FILTER(B2:B9, H2:H9="South")
- =XLOOKUP("South", H2:H9, B2:B9)
- =INDEX(B2:B9, MATCH("South", H2:H9, 0))

Clear Respon

accenture

Please note: Your video and audio is being recorded.It will be reviewed to check for integrity.

222120056
Campus Hiring - Technical 2025 - New Constr... / Saved: 0 seconds ago

Test Time: 00:44:57

Finish Test

1. Common Application...

1 2 3 4 5 6 7

Next

Attempted: 0/7

Question 1

Revisit Later

Consider you are a software developer working on a new application for a large corporation. Your application is expected to run on a variety of different computers with varying hardware specifications and operating systems. You have to ensure compatibility and smooth operation on all of these different systems. Which property of an operating system is most important for you to consider? Select the correct answer from the given choices.

Select an option

Clear Response


- User interface
- Security
- Device management
- Resource allocation

Need Help? Contact us (Please add country code while dialing) +91 63665-24235

+91 63665-24235

Browser 1.6.8

Question 3 of 3

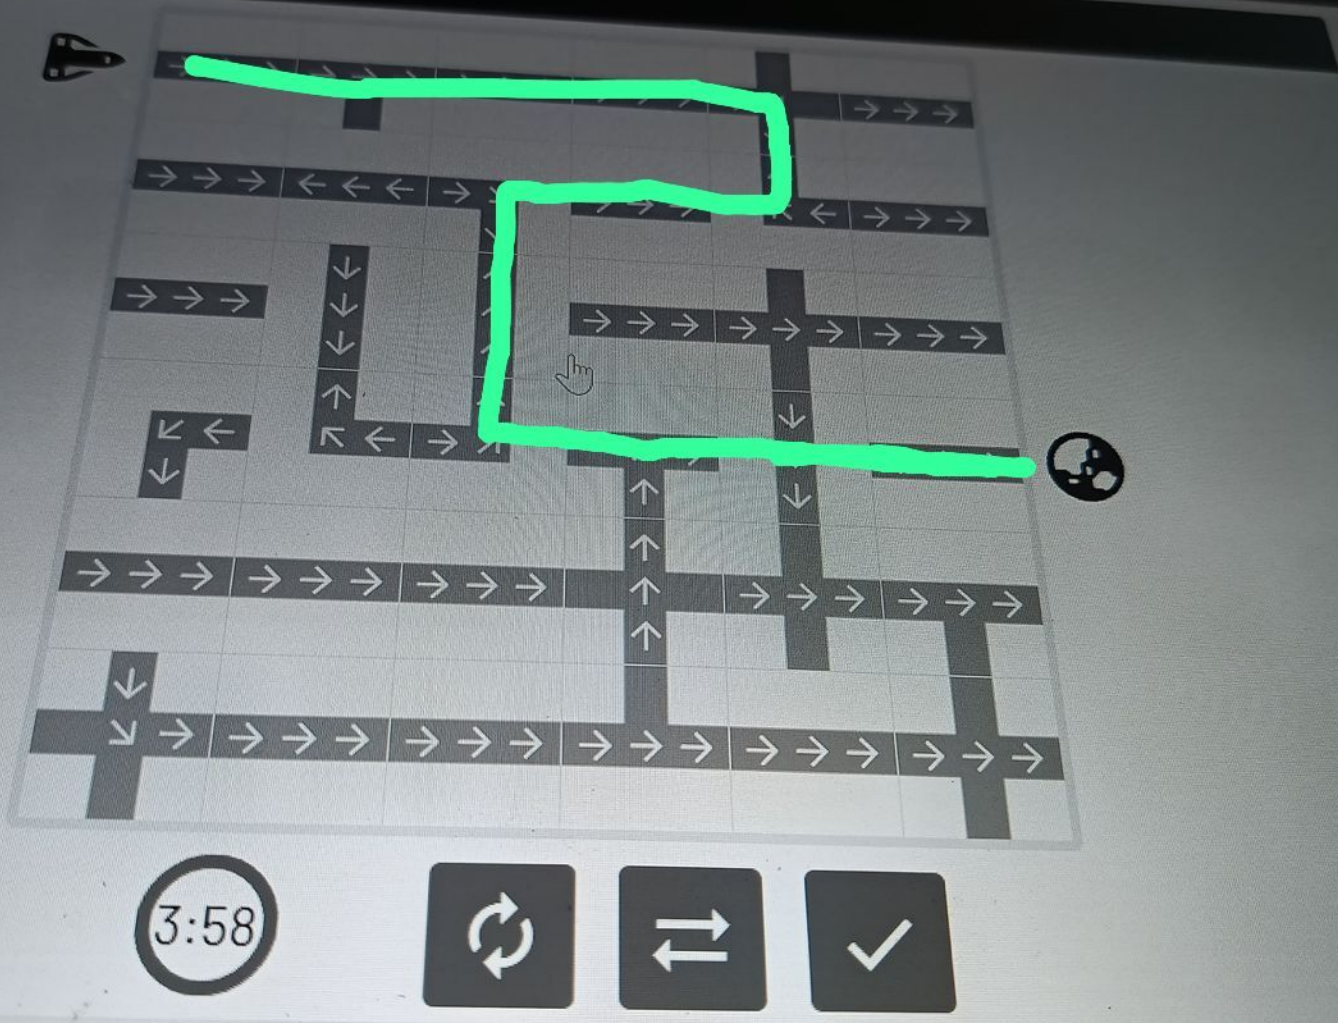

Question 5

Revisit Later

sume a developer writes a program that needs to create a new process and run a
erent executable file. Which pair of system calls in a UNIX-like OS fulfill this
irement? Select the correct option from the given choices.

Select an option

Clear Response

- create() and run()
- fork() and exec()
- fork() and wait()
- spawn() and terminate()

Question 4

Revisit Later

ane wants to create a slide that illustrates a progression over time using icons, text, nd lines. She aims for it to appear visually dynamic without manually animating each ep. Which MS PowerPoint feature can help speed up this process?

Select an option

Clear Response

- Use Slide Zoom feature to create dynamic progression slides quickly.
- Use SmartArt Process layout and apply "By Paragraph" animation.
- Apply the Morph transition across duplicated slides for smooth effect.
- Create a custom layout with background images and animation triggers.

Question 3

Revisit Later

Select an option

Clear Respon

In MS Word, John wants to quickly fix inconsistent headings in a long document. What should he update?

- Font
- Find
- Table of Contents
- Styles

accenture

Please note: Your video and audio is being recorded.It will be reviewed to check for integrity.

Question 1

Revisit Later

Assume that you have a table named "customers" with the columns: "customerID", "name", "city", and "email".
Which SQL query effectively retrieves all the details of those customers who are located in 'New York' from the table? Analyze the given choices and select the correct option.

Select an option

Clear Response

```
1 SELECT * FROM customers WHERE city = 'New York';
```

```
1 SELECT * FROM TABLE customers WHERE city = 'NY';
```

```
1 SELECT * FROM customers WHERE city LIKE '%New York%';
```

```
1 SELECT * FROM customers WHERE city = 'NYC';
```

accenture

222120056
Campus Hiring - Technical 2025 - New Constr... / Saved: 60 seconds ago

Test Time: 00:43:45

Finish Test

1. Common Application... | 1 | 2 | 3 | 4 | 5 | 6 | 7 |

Previous | Next Section

Attempted: 0/7

Question 7

Revisit Later

Assume that you are a computer architect designing a new computer system. You have to decide how the data will be transferred between registers in the CPU.

Which among the following options is the correct way of performing register transfers as per the above scenario?

Select an option

Clear Response

- Register transfer is the process of transferring data between registers in a computer system.
- Register transfer is a technique used to transfer data between different computer systems.
- Register transfer is a type of bus used in computer systems.
- Register transfer is a type of instruction used in assembly language programming.

222120056 -155128271

Question 6

Revisit Later

Suppose you want to implement a bus where the input-output devices are attached to the computer by wires. In this, the data transfer on a bus is carried out by electronic processes. Then the host controller sends messages to the device controller, and the device controller performs the operations.

Which device will you choose if these device controllers consist of a built-in cache so that data transfer occurs faster?

Select an option

Clear Response

- Enhanced interior drive electronics
- Enhanced integrated drive electronics
- Enhanced interior driver electronics
- Enhanced integrated hard driver

222120056 -155128271

Attempted: 0/10

Question 3

Revisit Later

Which of the given options (as values for s) could possibly print the output as "Valid" in the following pseudocode?

```
1 function validCheck (string s):
2 if s matches "[a-zA-Z0-9]{6}"
3     then print "Valid"
4 else
5     then print "Not Valid"
6 end if
7 end function validCheck
```

Select an option

Clear Respo

- arun32
- kkvarun32
- arun$2
- arun@2

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 63665-24235

m Browser 1.6.8

es and mark records. In this case, you also
he marks record is absent. Which SQL
sk?
ect option.

```
1 SELECT E.StudentName, FROM M.Mark
2 WHERE StudentDetails E
3 LEFT JOIN
4 StudentMark M
5 ON E.StudentId = M.StudentId;
```

```
1 SELECT E.StudentName, M.Mark
2 FROM StudentDetails E
3 LEFT JOIN
4 StudentMark M
5 ON E.StudentId = M.StudentId;
```

us (Please add country code while dialing) +91 63665-24235 +91 63665-24235

16:52

Attempted: 0/10

Question 2

Revisit Later

Select an option

Clear Response

Assume that you want to fetch student names and mark records. In this case, you also want to display the student's details even if the marks record is absent. Which SQL query can be used to complete the desired task?
Analyze the given choices and select the correct option.

```
1 SELECT E.StudentName, FROM M.Mark
2 WHERE StudentDetails E
3 LEFT JOIN
4 GROUP BY StudentMark M
5 IN E.StudentId = M.StudentId;
```

```
1 SELECT E.StudentName, M.Mark
2 FROM StudentDetails E
3 LEFT JOIN
4 GROUP BY StudentMark M
5 IN E.StudentId = M.StudentId;
```

Need Help? Contact us (Please add country code while dialing) +91 63665-24235

+91 63665-24235

ser 1.6.8

Attempted: 0/10

Question 6

Revisit Later

What will be the output of the following pseudo code?

```
1 Integer p,q,r
2 Set p=4, q=3, r=7
3 if((q^p^9)<(8+r+q))
4       r=(7^7)+q
5       q=(q+r)+p
6 End if
7 r=q+p
8 Print p+q+r
```

Select the correct option from the given choices.

Select an option

- 24
- 29
- 28
- 34

Clear

Need Help? Contact us (Please add country code while dialing) +91 63665-24235

+91 63665-24235

Exam Browser 1.6.8

Attempted: 0/10

Question 5

Revisit Later

Select an option

Clear

What will be the output of the following pseudo code?

```
1 Integer p,q,r
2 Set p=5, q=2, r=10
3 for(each r from 3 to 5 )
4     q=4^q
5 End for
6 p=12+q
7 for(each r from 4 to 7 )
8     q=(r+p)+r
9 End for
10 Print p+q
```

Select the correct option from the given choices.

- 70
- 55
- 41
- 50

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 63665-24235

Exam Browser 1.6.8

Attempted: 0/10

Question 4

Revisit Later

Select an option

Clear Re

What will be the output of the following pseudo code?

```
1 Integer j
2 Integer arr[4]= {1, 2, 3, 4}
3 arr[1]=(arr[3]&3)+arr[0]
4 if((1&arr[0])<arr[2])
5     arr[1]=(8&5)+arr[1]
6 End if
7 Print arr[1]+arr[2]
```

Select the correct option from the given choices.

- 20
- 13
- -12
- 4

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 63665-24235

xam Browser 1.6.8

Question 9

Revisit Later

Select an option

Clea

What will be the output of the following pseudo code?

```
1  Integer a,b,c
2  Set a=3, b=8, c=6
3    c=a+c
4  if((c+a)<(6-c))
5    b=(1&10)+c
6  Else
7  b=(c+c)+c
8  if((7&a&b)<(a&b&7))
9    c=(b+c)+c
10 End if
11   End if
12     Print a+b+c
```

Select the correct option from the given choices.

- 39
- 40
- 37
- 51

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 63665-24235

Exam Browser 1.6.8

Attempted: 0/10

Question 8 | Revisit Later | Select an option | Clear

What will be the output of the following pseudo code?

```
1  Integer pp,qq,rr
2  Set pp=2, qq=3, rr=7
3  rr=(rr+qq)+qq
4  if(2<rr || (rr&4)<qq)
5      qq=4+rr
6      if((qq&rr&pp)<(7+pp-qq))
7          pp=(pp&1)+rr
8      End if
9  End if
10 Print pp+qq+rr
```

Select the correct option from the given choices.

- 32
- 36
- 29
- 40

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 63665-24235

am Browser 1.6.8

Question 7

Revisit Later

Select an option

What will be the output of the depicted pseudo code?

```
1 Integer a,b,c
2 Set a=8, b=5, c=6
3 for(each c from 3 to 4 )
4   b=a+b
5   b=(b+7)+a
6   b=(b&4)+b
7 End for
8 Print a+b
```

Note- & bitwise AND - The bitwise AND operator (&) compares each bit of the first operand to the corresponding bit of the second operand. If both bits are 1, the corresponding result bit is set to 1. Otherwise, the corresponding result bit is set to 0.

Select the correct option from the given choices.

- 78
- 69
- 55
- 65

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 63665-24235

e Exam Browser 1.6.8

Question 2

Revisit Later

Assume that a security engineer is setting up a secure IPSec connection using ESP with authentication. The system must ensure data confidentiality, integrity, and proper packet sequencing with minimal performance overhead.

Which configuration best meets these requirements? Analyze the given choices and select the correct answer.

Select an option

Clear Response

- Use AES encryption with SPI tracking, sequence numbering, and optional authentication in ESP.
- Implement Triple DES with AH only, handling packet sequencing manually.
- Apply DES encryption with AH and ESP, using SPI for tracking and padding for confidentiality.
- Use AES with ESP authentication, sequence numbering, and padding to ensure data integrity.

Question 1

Revisit Later

Assume that a developer is tasked with configuring a high-security Wi-Fi environment for a sensitive government project using Android devices. He/she must implement a solution that leverages both WPA3-Enterprise security and the highest available encryption settings to ensure compliance with stringent security requirements.

Refer to the given code snippet used to configure wpa_supplicant:

```
1 CONFIG_SAE=y
2 CONFIG_SUITEB=y
3 CONFIG_SUITEB192=y
```

In the given scenario, which is the incorrect configuration line that might potentially weaken the desired security level? Select the correct option from the given choices.

Select an option

Clear Response

- CONFIG_SAE=y is unnecessary since WPA3-Enterprise does not require SAE
- CONFIG_SUITEB=y is required to enable basic Suite B cryptography
- CONFIG_SUITEB192=y enables the highest level of security, Suite B at 192-bit
- CONFIG_SUITEB=y is redundant when CONFIG_SUITEB192=y is also specified

Question 10

Revisit Later

Select an option

Clear

What will be the output of the following pseudo code for a=1, b=2, c=10?

```
1  Integer funn(Integer a, Integer b, Integer c)
2      if((a+b)+(b+c)>(a+b+c))
3          if(a>b)
4              b=b+c
5              if((c+a+b)<(a+b+c))
6                  c=(b+c)+c
7              End if
8          End if
9      End if
10     Print a+b+c
```

Select the correct option from the given choices.

- 9
- 15
- 13
- 19

222120056 -155128271

Question 5

Revisit Later

Consider that as part of the data center modernization initiative, the IT team is tasked with addressing storage challenges. The goal is to leverage existing storage devices from various vendors and integrate them with the next generation storage solutions.How does resource pooling play a crucial role in achieving elasticity in storage solutions for cloud computing? Select the correct answer form the given choices.

Select an option

Clear Response

- By eliminating the need for server virtualization
- By minimizing financial and contractual commitments
- By ensuring a global-scale, reliable, and resilient storage solution
- By optimizing capacity for executing code and running instances

Attempted: 0/14

Question 4

Revisit Later

Assume that a company's goal is to leverage both private and public clouds to optimize resource utilization and manage dynamic workloads effunction Executionctively. To achieve this, the company needs a strategy that ensures secure data handling, seamless integration with existing systems, and cost efficiency.

Which approach should the company implement to achieve optimal performance in its brid cloud environment? Analyze the given choices and select the correct answer.

- Utilize a containerization strategy to ensure application portability and efficient resource utilization across both private and public clouds.
- Adopt a multi-cloud strategy to distribute workloads across several public cloud providers for enhanced resilience and cost management.
- Implement a serverless architecture to dynamically allocate cloud resources based on real-time demand, reducing infrastructure management overhead.
- Rely solely on dedicated on-premises infrastructure for all critical operations while using the public cloud for non-sensitive tasks.

Question 3

Revisit Later

Assume that a company migrates its application to a cloud computing environment. The cloud provider handles infrastructure services, while the customer develops and deploys their application. How does the concept of 'shared responsibility' impact security management in this scenario? Select the correct answer from the given choices.

Select an option

Clear Response

- The cloud provider handles all security measures.
- Security is managed by third-party auditors.
- Both the cloud provider and the customer share security responsibilities.
- The customer is solely responsible for security.

222120056
Campus Hiring - Technical 2025 - New Constr... / Saved: 60 seconds ago

Test Time: 00:39:26

Finish Test

3. Fundamentals of Net...

1 2 3 4 5 6 7 8 9 10

Previous Next

Attempted: 0/14

Question 8

Revisit Later

Assume that in a cloud-based application where scalability is crucial, which cloud storage option allows for dynamic scaling without the need for manual intervention? Analyze the given choices and select the correct answer.

Select an option

Clear Response

- Block Storage
- File Storage
- Object Storage
- Tape Storage

222120056 -155128271

Question 7

Revisit Later

Assume that a company is migrating its legacy data sources to a new cloud-based platform while maintaining operations without downtime. During the migration, they need to ensure that data from both the old and new systems can be accessed simultaneously for real-time reporting and analytics, with data being logically integrated without physical movement.

Considering the requirements, which architectural layer would best handle the logical integration and seamless access to data from both environments, ensuring minimal disruption and secure data access? Analyze the given choices and select the correct answer.

Select an option

Clear Response

- Connection layer using direct database access protocols.
- Consumption layer utilizing middleware with abstracted APIs.
- Abstraction layer that logically unifies disparate data sources.
- Data caching layer storing temporary data replicas.

Question 6

Revisit Later

Consider that a multinational corporation is migrating its sensitive data to the cloud for storage and processing. During the migration process, the IT team is concerned about maintaining data confidentiality and preventing unauthorized access. Which cloud storage security measure should the team prioritize to address these concerns? Select the correct option from the given choices.

Select an option

Clear Response

- Implementing robust access controls
- Enforcing data encryption at rest
- Utilizing strong authentication mechanisms
- Regularly auditing access logs

222120056
Campus Hiring - Technical 2025 - New Constr... / Saved: 0 seconds ago

Test Time: 00:39:03

Finish Test

3. Fundamentals of Net...

5 6 7 8 9 10 11 12 13 14

Previous Next

Attempted: 0/14

Question 11

Revisit Later

A network engineer is inspecting a network connection that follows the OSI model. He/she is looking into a layer that has broken down the data to be sent into numbered segments. He/she finds that this layer identifies other peers using port numbers. Which layer is the engineer looking into?

Select an option

Clear Response

- Transport Layer
- Data Link Layer
- Application Layer
- Network Layer

222120056 -155128271

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 63665-24235

ser 1.6.8

Question 10

Revisit Later

Clear Response

During a video call, consider that data packets are sent from one device to another across different networks. To ensure the data arrives correctly and in order, which layer of the OSI model is responsible for error checking and reliable delivery? Select the correct option from the given choices.

Select an option

- Physical Layer
- Data Link Layer
- Transport Layer
- Network Layer

222120056 -155128271

Question 9

Revisit Later

Hackers attempt to intercept and manipulate data packets traveling across a network by inserting malicious routing information, allowing them to redirect traffic through their own systems. This method enables them to eavesdrop or alter data without detection.

What type of attack is this called?

Select an option

Clear Response

- Packet Sniffing
- IP Spoofing
- Routing Table Poisoning
- DNS Spoofing

Question 14 Revisit Later

What is the primary function of a firewall in network security? Analyze the given choices and select the correct answer.

Select an option Clear Response

- Speed up internet connections
- Encrypt data
- Block unauthorized access
- Allocate IP addresses

Question 13

Revisit Later

Consider that an organization has two geographically separate offices, Office A and Office B, and needs to allow all the users in Office A to securely access resources in Office B, and vice versa, as if they were on the same local network. Which VPN topology is most appropriate for this scenario? Select the correct option from the given choices.

Select an option

Clear Response

- Remote Access VPN
- Client-to-Site VPN
- Site-to-Site VPN
- SSL VPN

Question 12

Revisit Later

Clear Response

Assume that an employee at a multinational organization is working from home due to some reason and needs to access the company's internal network to retrieve some files. Which type of Virtual Private Network (VPN) will be best suitable for this case? Select the correct answer from the given choices.

Select an option

- Remote-access VPN
- Site-to-site VPN
- MPLS VPN
- PPTP VPN

Question 2

Revisit Later

What will be the output of the given code when the user clicks the button?

```
<body>
  <button onclick='myFunction();'>My Text</button>
  <div id="container"></div>
  <script type="text/JavaScript">
    function myFunction () {
      var newElem = document.createElement ("div");

      newElem.innerHTML = "sample text";
      newElem.style.color = "red";

    var container = document.getElementById ("container");
    container.appendChild (newElem);
  }
  </script>
</body>
```

Select an option

Clear Resp

- Sample text
- Nothing will happen
- Displays sample text in red color
- Error

Question 1

Revisit Later

You are configuring Jest to run tests with specific command-line options for coverage reporting and test execution. Which Jest command-line option would you use to generate a coverage report in HTML format?

```
// Jest Configuration in package.json
"jest": {
"collectCoverage": true,
"coverageReporters": ["text", "html"]
}
```

Select an option

Clear Response

- --coverageReporters=text,html
- --collectCoverage=true --coverageReporters=text,html
- --coverage --coverageReporters=text,html
- --collectCoverageFrom=src --coverageReporters=text,html

Common Application/Technical Section

- **Question 1:** Resource allocation
- **Question 2:** `=FILTER(B2:B9, H2:H9="South")`
- **Question 3:** Styles
- **Question 4:** Apply the Morph transition across duplicated slides for smooth effect.
- **Question 5:** fork() and exec()
- **Question 6:** Enhanced integrated drive electronics
- **Question 7:** Register transfer is the process of transferring data between registers in a computer system.

Revisit Later

changes its shape to a circular block when you move
ack to a rectangular block when you move your
ast-slow animation speed. How will you achieve this

```
.rect:hover{
border-radius:40px;
transition: 0.5s;
}
```

```
.rect:hover{
border-radius:30px;
transition: 0.5s;
}
```

```
.rect:hover{
border-radius:20px;
transition: 0.5s;
}
```

lp? Contact us (Please add country code while dialing) +91 63665-24235 +91 63665-24235

17:00

Question 4

Revisit Later

You want to create a block that changes its shape to a circular block when you move your mouse over it, and reverts back to a rectangular block when you move your mouse away from it, with a slow-fast-slow animation speed. How will you achieve this goal?

```
1 .rect:hover{
2 border-radius:50px;
3 transition: 0.5s;
4 }
```

```
1 .rect:hover{
2 border-radius:40px;
3 transition: 0.5s;
4 }
```

```
1 .rect:hover{
2 border-radius:30px;
3 transition: 0.5s;
4 }
```

Attempted: 0/14

Question 3

Revisit Later

Select an option

Clear Respons

What does the following line in the given canvas tag indicate?

```
1 <canvas id="myCanvas">
2     HTMLS Canvas not supported.
3 </canvas>
```

- A comment for the user
- A comment for incompatible browsers
- A comment for Internet Explorer and Opera
- All of the given options

222120056 -155128271

Question 7

Revisit Later

What should be the output of the below pseudocode?

```
1  class Parent{
2      Parent get() {
3          Print "Parent";
4          return this;
5      }
6  }
7  class Child extends Parent{
8      Child get() {
9          Print "Child";
10         return this;
11     }
12 }
13
14 Parent p = new Child ();
15 p.get();
```

Select an option

Clear Respo

- Parent
- Child
- Parent
  Child
- Child
  Parent

Attempted: 0/14

Question 6

Revisit Later

Which of the following criteria for choosing a patch management system from a vendor is incorrect?

Select an option

Clear Response

- The vendor should have high response rates to vulnerabilities by providing patches and updates
- A complex product should be chosen over a simple and mature product because the latter does not have sufficient functionalities for detection of vulnerabilities
- The deployment and maintenance cost of the patch management system should be low
- The system administrators should be in a position to keep track of the system and the status of the patches

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 63665-24235

4 Computer Science

1 2 3 4 5 6 7 8 9 10

Previous

Attempted: 0/14

Question 5

Revisit Later

Clear R

What will be the output of the following code?

```
class Tech_Modules:
    name="Django"

    def __str__(self):
        for i in range(1):
            name="Numpy"
        return name

    def __init__(self):
        if isinstance(self.name,str):
            self.name="Pandas"

t=Tech_Modules()
print(t)
```

Select an option

- Numpy
- Django
- Pandas
- None

Need Help? Contact us (Please add country code while dialing) +91 63665-24235

+91 63665-24235

m Browser 1.6.8

4 Computer Science

1 2 3 4 5 6 7 8 9 10

Previous

Attempted: 0/14

Question 9

Revisit Later

Assume a mobile application needs to retrieve a list of all available restaurants from a food delivery service's API. The application should only read the data and not make any changes to the server's resources. Which common HTTP method is most appropriate for this type of data retrieval? Select the correct option from the given choices.

Select an option

Clear Resp

- POST
- PUT
- DELETE
- GET

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 63665-24235

Browser 1.6.8

Question 10

Revisit Later

Assume a development team is designing a new RESTful API to manage a product catalog for their e-commerce platform. They need to create an endpoint that will retrieve detailed information about a specific product using its unique product ID. Which HTTP method and URL structure best aligns with RESTful principles for this operation? Select the correct option from the given choices.

Select an option

Clear Res

- POST /products/{id}/details
- GET /product_details?id={id}
- PUT /products/{id}/fetch
- GET /products/{id}

Consider the given code. What will be the output of the code? Select the correct answer from the given choices.

```
class Children
{
  private final void flipper()
  {
    System. Out. println("Children");
  }
}

public class Parent extends Children
{
  public final void flipper()
  {
    System. Out. println("Parent");
  }
  public static void main(String[] args)
  {
    New Parent(). Flipper ();
  }
}
```

Select an option

Clear Re

- Children
- Parent
- Children
  Parent
- Parent
  Children

Question 13

Revisit Later

Consider that two transactions run concurrently:

Transaction A: UPDATE Products SET Stock = Stock - 1 WHERE ProductID = 1001;
Transaction B: UPDATE Products SET Stock = Stock - 2 WHERE ProductID = 1001;

Both succeed, but the final stock shows only the result of one update instead of both.
Which concurrency issue is this? Select the correct option from the given choices.

Select an option

Clear

- Phantom Read
- Lost Update
- Non-repeatable Read
- Deadlock

Question 12

Revisit Later

Assume a university database has two tables: Students(StudentID, Name, DepartmentID) Departments(DepartmentID, DepartmentName). The admin wants to list each student along with their department name. Which type of SQL join should be used in this case? Select the correct option from the given choices.

Select an option

Clear

- INNER JOIN
- LEFT JOIN
- RIGHT JOIN
- CROSS JOIN

Please note: Your video and audio is being recorded.It will be reviewed to check for integrity.

Question 11

Revisit Later

An e-commerce company updates its website weekly by adding new features and fixing bugs using an Agile development approach. After each update, the new version is automatically deployed to the live environment. Which key DevOps practice is being implemented to ensure rapid and frequent releases?
Analyze the given choices and select the correct option.

Select an option

Clear Response

- The practice involves automating the process of releasing software to production frequently and reliably.
- Continuous Integration focuses on merging code changes regularly to prevent integration issues.
- Continuous Testing ensures that automated tests are run continuously to validate the code quality.
- Monitoring involves tracking the application's performance and user activity after deployment.

222120056 -155128271

Section 3: Fundamentals of Networking, Security, and Cloud

- **Question 1:** `CONFIG_SAE=y` is unnecessary since WPA3-Enterprise does not require SAE.
- **Question 2:** Use AES with ESP authentication, sequence numbering, and padding to ensure data integrity.
- **Question 3:** Both the cloud provider and the customer share security responsibilities.
- **Question 4:** Implement a serverless architecture to dynamically allocate cloud resources based on real-time demand, reducing infrastructure management overhead.
- **Question 5:** By optimizing capacity for executing code and running instances.
- **Question 6:** Enforcing data encryption at rest.
- **Question 7:** Abstraction layer that logically unifies disparate data sources.
- **Question 8:** Object Storage.
- **Question 9:** Routing Table Poisoning.
- **Question 10:** Transport Layer.
- **Question 11:** Transport Layer.
- **Question 12:** Remote-access VPN.
- **Question 13:** Site-to-Site VPN.
- **Question 14:** Block unauthorized access.

Section 2: SQL & Pseudo Code

- **Question 1:** `SELECT * FROM customers WHERE city = 'New York';`
- **Question 2:** `SELECT E.StudentName, M.Mark FROM StudentDetails E LEFT JOIN StudentMark M ON E.StudentId = M.StudentId;`
- **Question 3:** `arun32`
- **Question 4:** 4
- **Question 5:** 50
- **Question 6:** 28
- **Question 7:** 65
- **Question 8:** 32
- **Question 9:** 39
- **Question 10:** 13

4 Computer Science

5 6 7 8 9 10 11 12 13 14

Attempted: 0/14

Question 14

Revisit Later

Consider that a team wants to improve deployment speed and reduce downtime when updating their containerized application. Which practice should the team adopt in this scenario? Select the correct option from the given choices.

Select an option

Clear

- Use rolling updates with health checks
- Increase the number of replicas
- Disable the health checks
- Use a larger base image

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 63665-24235

m Browser 1.6.8

3. Front end Technology

Attempted: 1/1

Question 1

Revisit Later

How to Attempt?

You are tasked with completing and styling a dropdown menu where the user can select a fruit and display the selected fruit on the screen.

Objective(s):

1. Create a **<p>** tag with the id **selected-fruit**. This paragraph will be used to display the selected fruit on the screen when the button is clicked.
2. Ensure that the text inside the **.dropdown-container is center-aligned**.
3. Implement functionality so that when the **Show Selected** button is clicked, the fruit selected from the dropdown is displayed inside the **<p>** tag with id **selected-fruit**.

Constraint(s):

HTML CSS JavaScript

```
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=d
6      <title>Dropdown Menu</title>
7      <link rel="stylesheet" href="index.cs
8  </head>
9  <body>
10     <div class="dropdown-container">
```

Result Console

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 6

Secure Exam Browser 1.6.8

Please note: Your video and audio is being recorded.It will be reviewed to check for integrity.

accenture

222120056
Campus Hiring - Technical 2025 - New Constr... / Saved: 0 seconds ago

Test Time: 00:17:51

Finish Test

4. Computer Science

5 6 7 8 9 10 11 12 13 14

Previous

Attempted: 14/14

Question 14

Revisit Later

Clear Response

Consider that a team wants to improve deployment speed and reduce downtime when updating their containerized application. Which practice should the team adopt in this scenario? Select the correct option from the given choices.

Select an option

- (●) Use rolling updates with health checks
- ( ) Increase the number of replicas
- ( ) Disable the health checks
- ( ) Use a larger base image

222120056 -155128271

Section 4: Computer Science

- **Question 1:** `--coverage --coverageReporters=text,html`
- **Question 2:** Displays sample text in red color.
- **Question 3:** A comment for incompatible browsers.
- **Question 4:** `.rect:hover { border-radius: 50px; transition: 0.5s; }`
- **Question 6:** A complex product should be chosen over a simple and mature product because the latter does not have sufficient functionalities for detection of vulnerabilities.
- **Question 7:** Child.
- **Question 9:** GET.
- **Question 10:** `GET /products/{id}`
- **Question 11:** The practice involves automating the process of releasing software to production frequently and reliably.
- **Question 12:** INNER JOIN.
- **Question 13:** Lost Update.
- **Question 14:** Use rolling updates with health checks.

Attempted: 1/1


? Question | </> HTML | # CSS | JavaScript | Result | Console

```
6       <title>Dropdown Menu</title>
7       <link rel="stylesheet" href="index.css">
8   </head>
9   <body>
10      <div class="dropdown-container">
11          <select id="fruit-dropdown">
12              <option value="Apple">Apple</option>
13              <option value="Banana">Banana</option>
14              <option value="Orange">Orange</option>
15          </select>
16          <button id="show-selected-btn">Show Selected</button>
17          <!-- Create a paragraph with id selected-fruit -->
18      </div>
19
20      <script src="index.js"></script>
21  </body>
22  </html>
```

Apple

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 6366

Secure Exam Browser 1.6.8

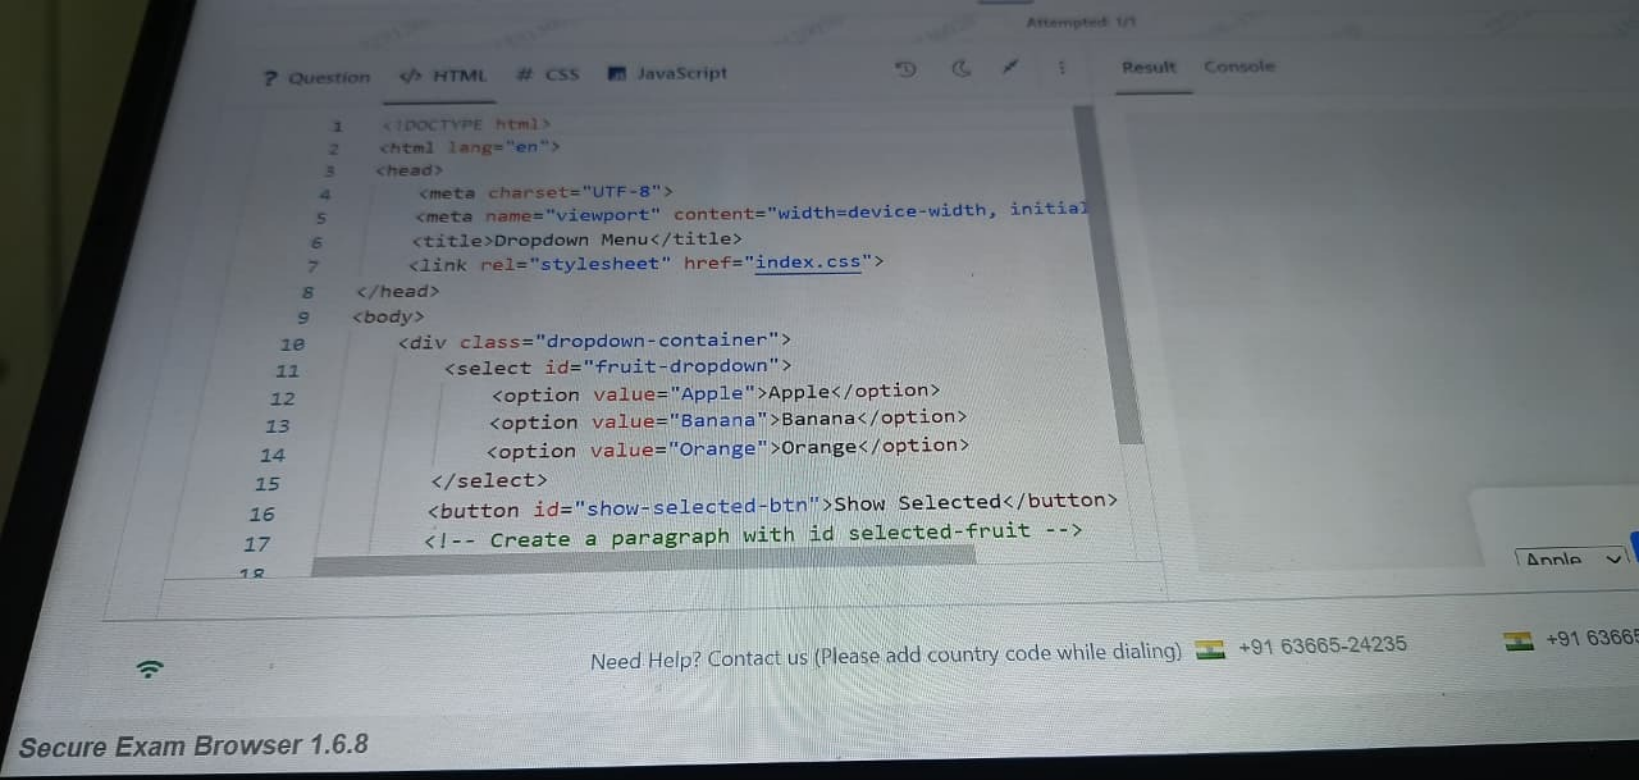
Attempted 1/1
Question
HTML
CSS
JavaScript
Result
Console
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial
<title>Dropdown Menu</title>
<link rel="stylesheet" href="index.css">
</head>
<body>

<select id="fruit-dropdown">
<option value="Apple">Apple</option>
<option value="Banana">Banana</option>
<option value="Orange">Orange</option>
</select>
<button id="show-selected-btn">Show Selected</button>
<!-- Create a paragraph with id selected-fruit -->
Apple
Need Help? Contact us (Please add country code while dialing)
+91 63665-24235
+91 63665
Secure Exam Browser 1.6.8

1. Create a **<p>** tag with the id **selected-fruit**. This paragraph will be used to display the selected fruit on the screen when the button is clicked.

2. Ensure that the text inside the **.dropdown-container is center-aligned**.

3. Implement functionality so that when the **Show Selected** button is clicked, the fruit selected from the dropdown is displayed inside the **<p>** tag with id **selected-fruit**.

Constraint(s):

- *Do not change the "**name**" or "**id**" of any element in the html as it will cause the code developed by the back-end developer to fail.*
- *Do not remove the **CDN link** for **jQuery** as your code will not run without it.*
- *You are not required to add/change any CSS styling in the form.*

Attempted: 1/1


</> HTML # CSS JavaScript

```
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=de
6      <title>Dropdown Menu</title>
7      <link rel="stylesheet" href="index.cs
8  </head>
9  <body>
10     <div class="dropdown-container">
```

Result Console

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 63

Secure Exam Browser 1.6.8

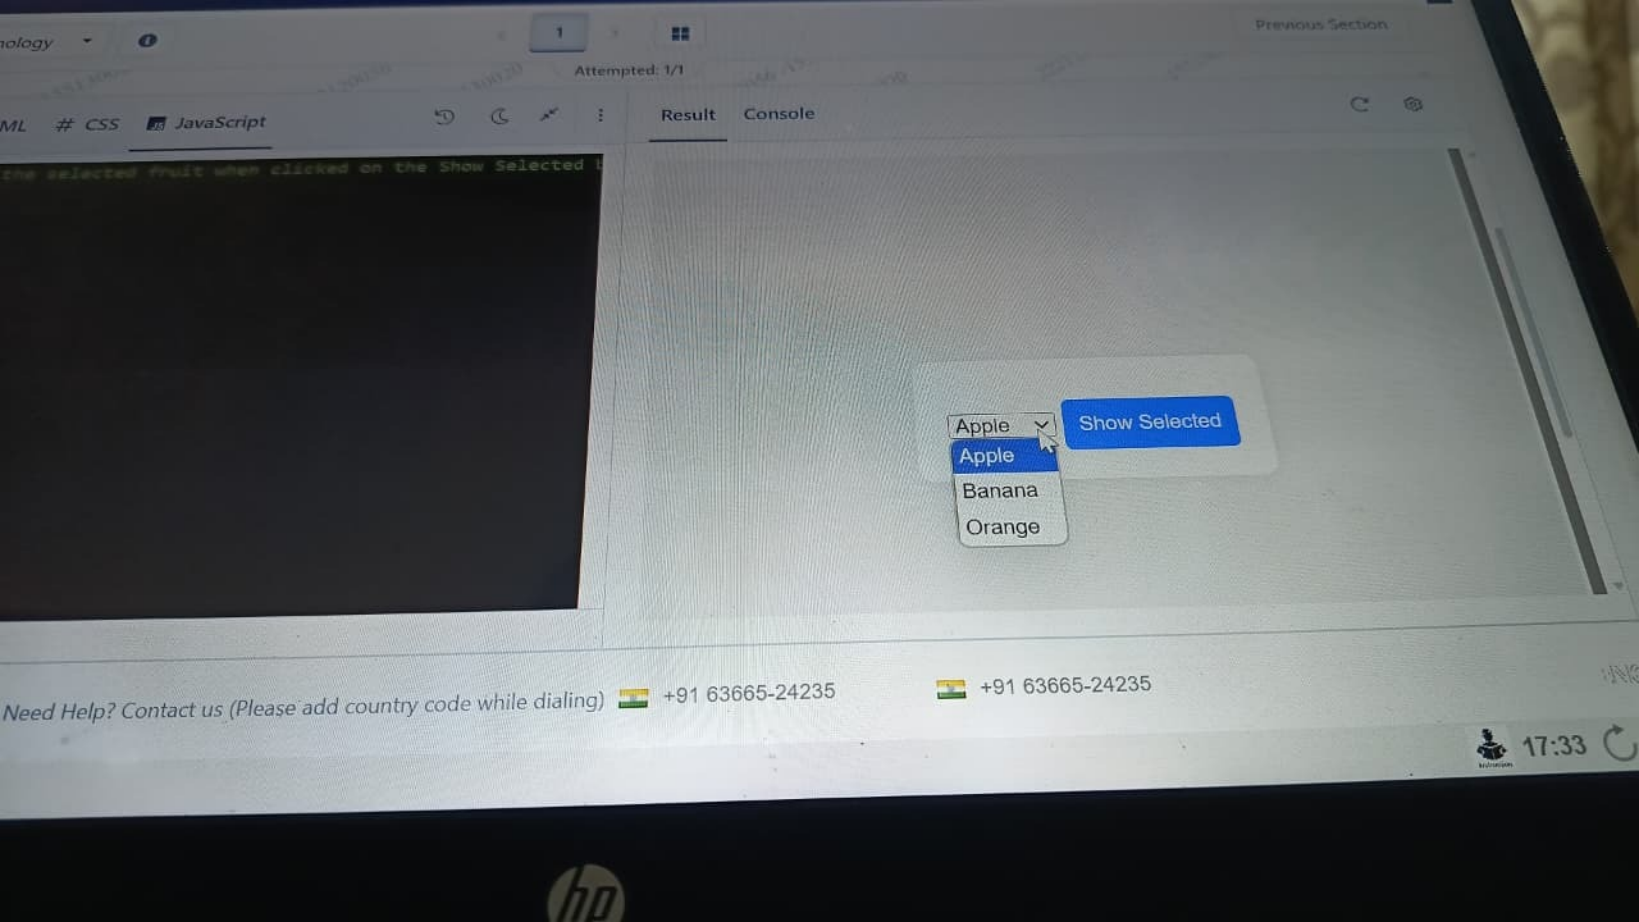
Previous Section
Attempted: 1/1
ML
CSS
JavaScript
Result
Console
Apple
Show Selected
Apple
Banana
Orange
Need Help? Contact us (Please add country code while dialing)
+91 63665-24235
+91 63665-24235
17:33

Attempted: 1/1

? Question | </> HTML | # CSS | JavaScript | Result | Console

```
14        border-radius: 10px;
15        box-shadow: 0px 0px 10px rgba(0, 0, 0, 0.1);
16    }
17
18    button {
19        margin-top: 10px;
20        padding: 10px;
21        background-color: #007BFF;
22        color: white;
23        border: none;
24        border-radius: 5px;
25        cursor: pointer;
26    }
27
28    button:hover {
29        background-color: #0056b3;
30    }
```

Apple

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 63

Secure Exam Browser 1.6.8

? Question </> HTML # CSS JavaScript Result Console

```
1   /* align the text to center in dropdown-container class */
2
3   body {
4       font-family: Arial, sans-serif;
5       background-color: #f0f0f0;
6       display: flex;
7       justify-content: center;
8       align-items: center;
9       height: 100vh;
10  }
11  .dropdown-container {
12      background-color: white;
13      padding: 20px;
14      border-radius: 10px;
15      box-shadow: 0px 0px 10px rgba(0, 0, 0, 0.1);
16  }
17
18  button {
```

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 636

Secure Exam Browser 1.6.8


1

Previous Section | Next Section

Attempted: 0/1

« Enter your Response

View Schema

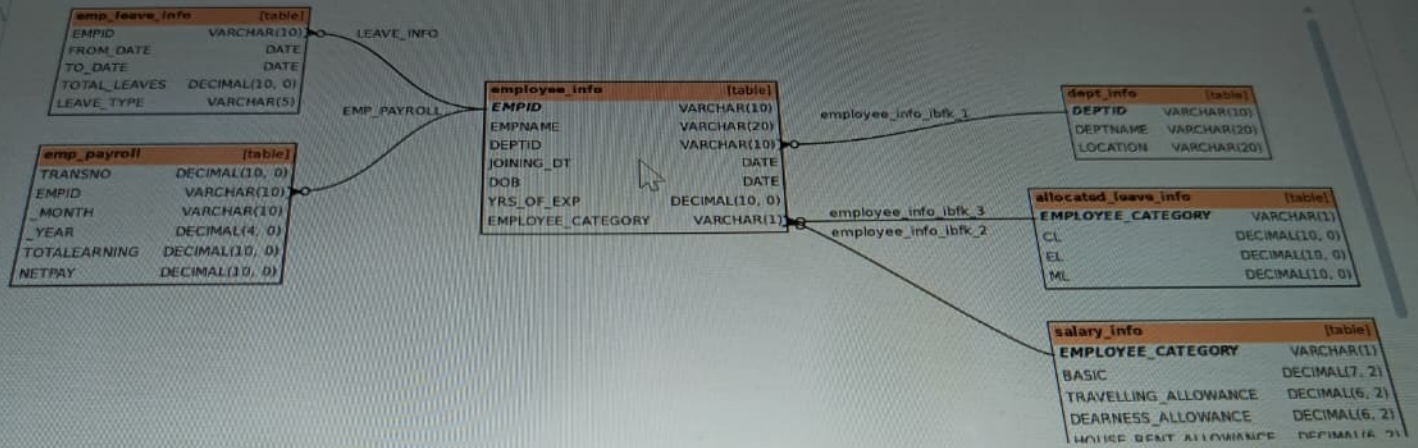

Query | View Schema | Output | Test Cases

Run Query | Check Query

e while dialing) +91 63665-24235

+91 63665-24235

Database

Question 1

Revisit Later

How to Attempt?

Write an SQL query to display:

The employee ID, Name, Basic salary, and Net pay for employees whose basic salary is greater than 5,000.

Your output should have 4 columns as given below:

EMPID	EMPNAME	BASIC	NETPAY

You can view the database schema by clicking the View Schema tab at the bottom of the query window on the right-hand side of the screen.

Attempted: 0/1

Enter your Response

MYSQL 8.0

1

Query | View Schema | Output | Test Cases

Need Help? Contact us (Please add country code while dialing) +91 63665-24235

Secure Exam Browser 1.6.8

Attempted: 1/1

? Question | </> HTML | # CSS | JS JavaScript | Result | Console

```
1  // Show the selected fruit when clicked on the Show Selected B
```

Apple

Need Help? Contact us (Please add country code while dialing) +91 63665-24235 +91 6366

Secure Exam Browser 1.6.8

JavaScript Code (`index.js`)

This code listens for the button click, retrieves the selected value from the dropdown, and displays it in the paragraph tag.

JavaScript

```javascript
document.getElementById('show-selected-btn').addEventListener('click', function() {
    // Get the dropdown element
    var dropdown = document.getElementById('fruit-dropdown');

    // Get the selected value
    var selectedValue = dropdown.value;


    // Get the paragraph element where the result should be displayed
    var resultParagraph = document.getElementById('selected-fruit');

    // Update the paragraph text with the selected fruit
    resultParagraph.textContent = selectedValue;
});
```

Attempted: 0/1

er your Response

Schema

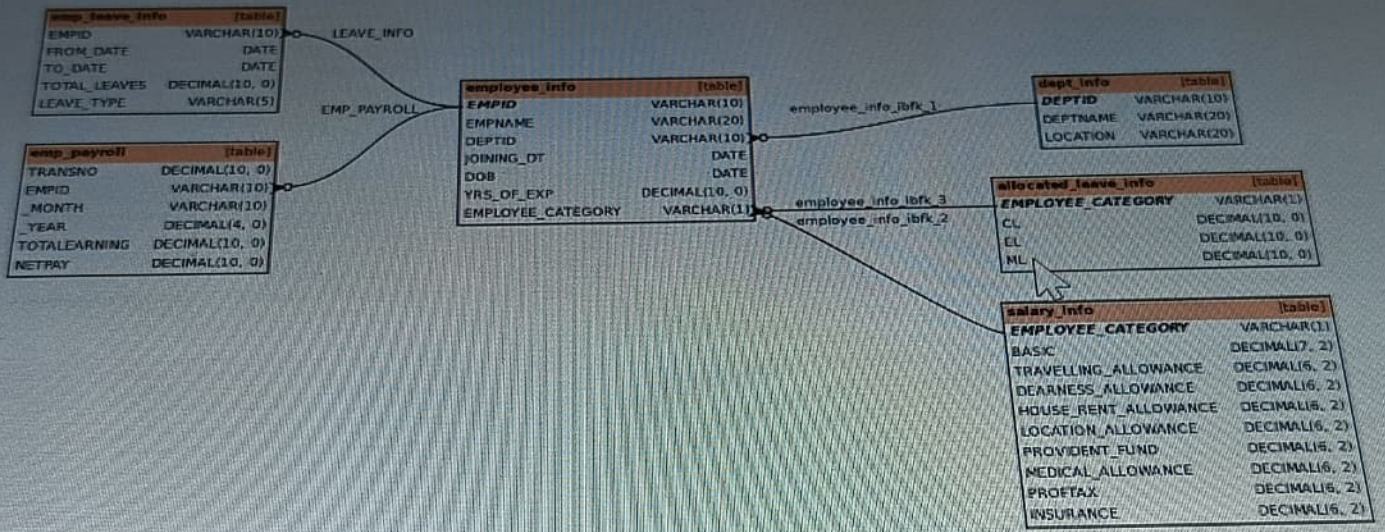


ew Schema Output Test Cases Run Query Check

+91 63665-24235 +91 63665-24235

Attempted: 0/1


« Enter your Response

View Schema

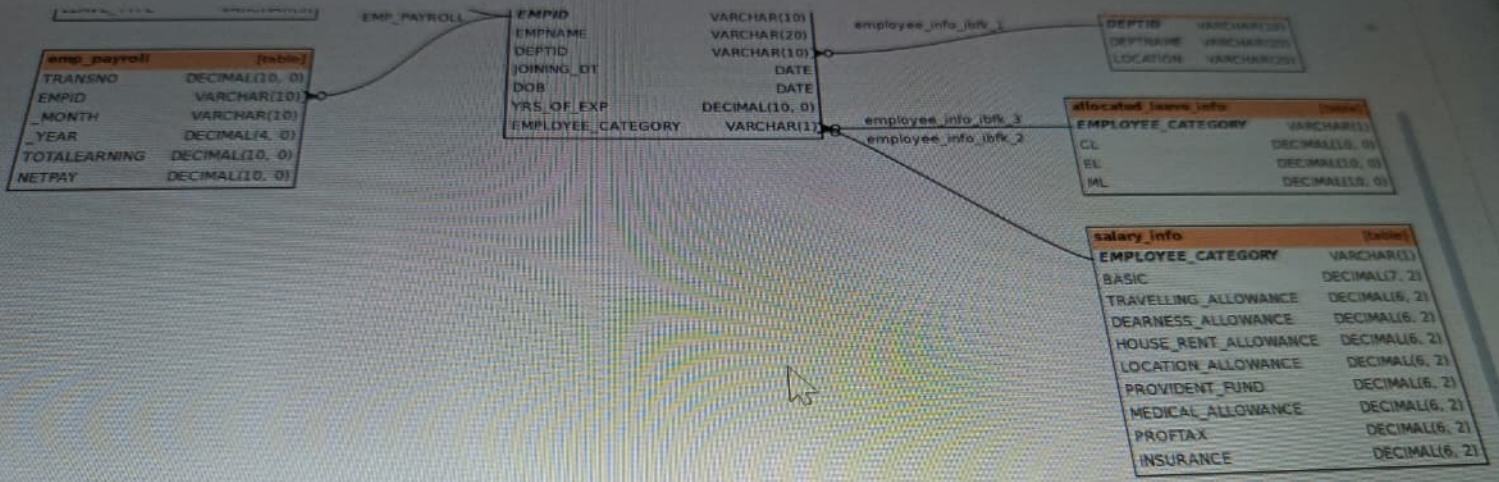

ery View Schema Output Test Cases Run Query Check Query

ling) +91 63665-24235 +91 63665-24235

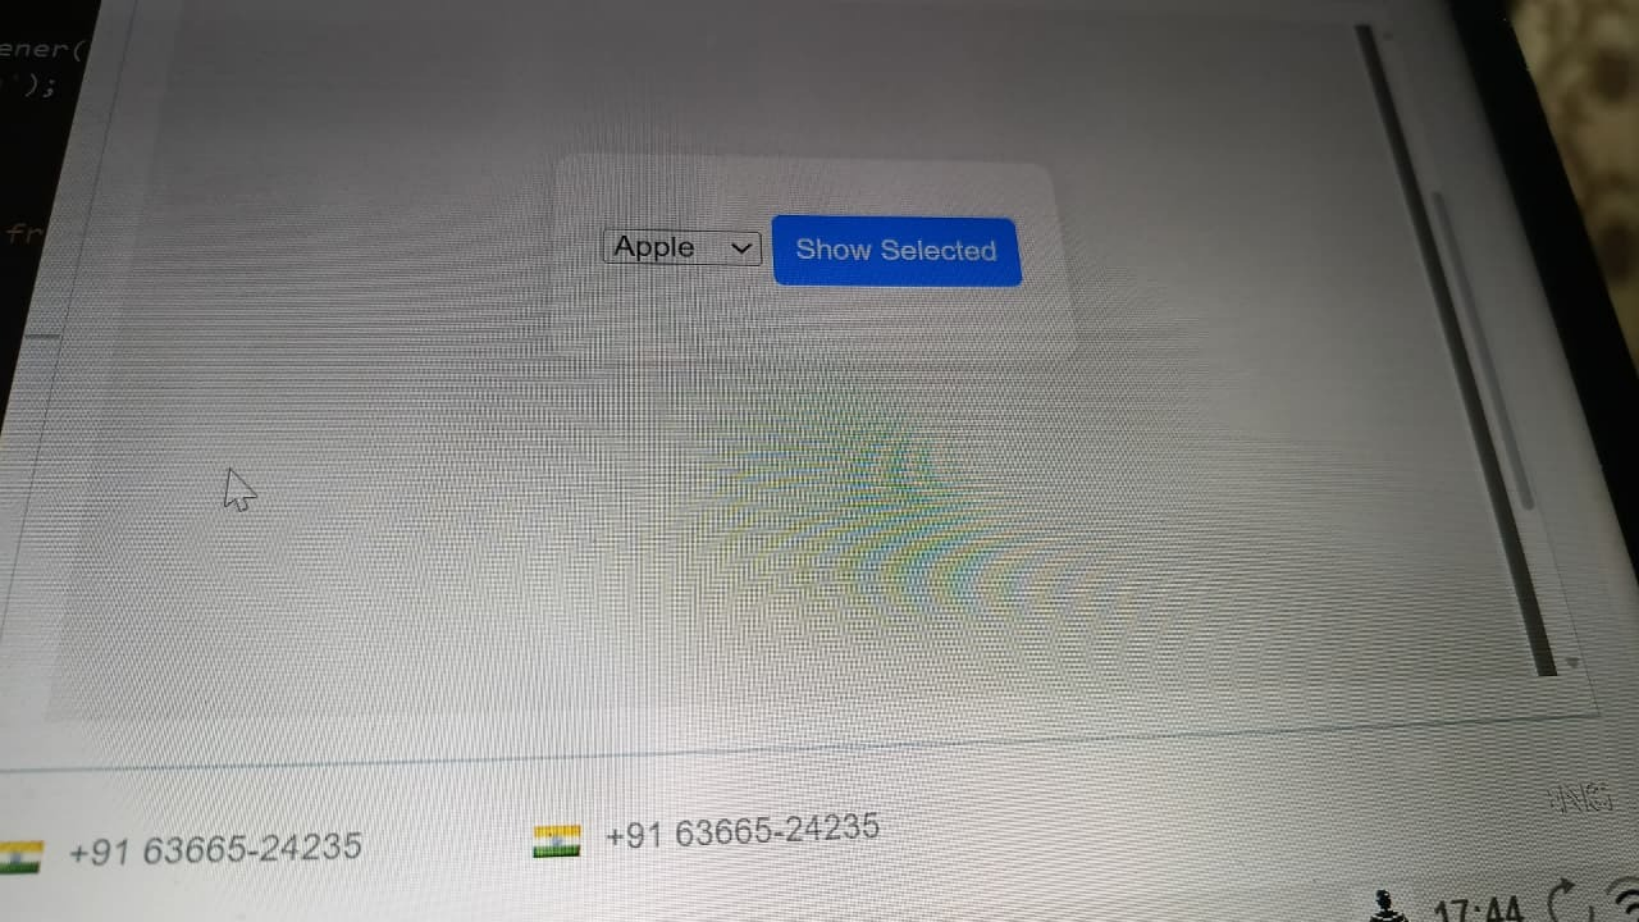
Apple
Show Selected
+91 63665-24235
+91 63665-24235

Logic:

1. **Select** the required columns.
2. **Join** `employee_info` with `salary_info` using `EMPLOYEE_CATEGORY` to get the `BASIC` salary.
3. **Join** `employee_info` with `emp_payroll` using `EMPID` to get the `NETPAY`.
4. **Filter** the results using the `WHERE` clause for `BASIC > 5000`.

SQL Query

SQL

```sql
SELECT
    ei.EMPID,
    ei.EMPNAME,
    si.BASIC,
    ep.NETPAY
FROM
    employee_info ei
JOIN
    salary_info si ON ei.EMPLOYEE_CATEGORY = si.EMPLOYEE_CATEGORY
JOIN
    emp_payroll ep ON ei.EMPID = ep.EMPID
WHERE
    si.BASIC > 5000;
```

Important Prerequisites

For the above JavaScript to work and to pass all constraints shown in your screenshots (Question 1 and 2), you must also ensure the HTML and CSS are correct:

1. HTML (`index.html`) You need to create the `<p>` tag mentioned in "Question 1". Place this on **line 17** (replacing the comment):

HTML

```html
<p id="selected-fruit"></p>
```

2. CSS (`index.css`) To satisfy "Constraint 2" (center alignment), add this to the `.dropdown-container` class:

CSS

```css
.dropdown-container {
    text-align: center;
    /* keep existing styles */
}
```

1. Backend

Example 1:

input1 : aaaabbbcc

Output : 1

Explanation:

Here, the string S is "aaaabbbcc". The string has length 9 which means N = 3. So, the grid will be:

a a a
a b b
b c c

The uniform row is row 0 where all the characters are 'aaa' but there are no uniform columns. Hence, **1** *is returned as the output.*

Example 2:

input1 : *ccee*

Attempted: 0/1

CSHARP12 Compiler: .NET 8

```
1   using System;
2   using System.Collections.Generic;
3
4   //Read only region start
5   public class UserMainCode
6   {
7       public int countUniformLines(string i
8       {
9           //Read only region end
10          //Write code here
11          throw new NotImplementedExcept
12      }
13  }
```

Use Custom Input

Need Help? Contact us (Please add country code while dialing) +91 63665-24235

Secure Exam Browser 1.6.8

1. Backend

Question 1

Revisit Later

How to Attempt?

You are given a string **S** whose length is a perfect square. Let N be the square root of the string's length, you have to build an N x N grid by filling the string in row-major order (left to right, top to bottom) and then you have to count how many rows and columns in the grid consist of the same character (all elements in that row or column are identical). Your task is to find and return an integer value representing the total number of such rows and columns.

Input Specification:

input1 : *A string S consisting of lowercase English letters (a-z).*

Output Specification:

Return an integer value representing the count of rows and columns where all characters are the same.


1


Attempted: 0/1


CSHARP12 Compiler: .NET 8

```
1   using System;
2   using System.Collections.Generic;
3
4   //Read only region start
5   public class UserMainCode
6   {
7       public int countUniformLines(string in
8       {
9           //Read only region end
10          //Write code here
11          throw new NotImplementedExcepti
12      }
13  }
```

Use Custom Input

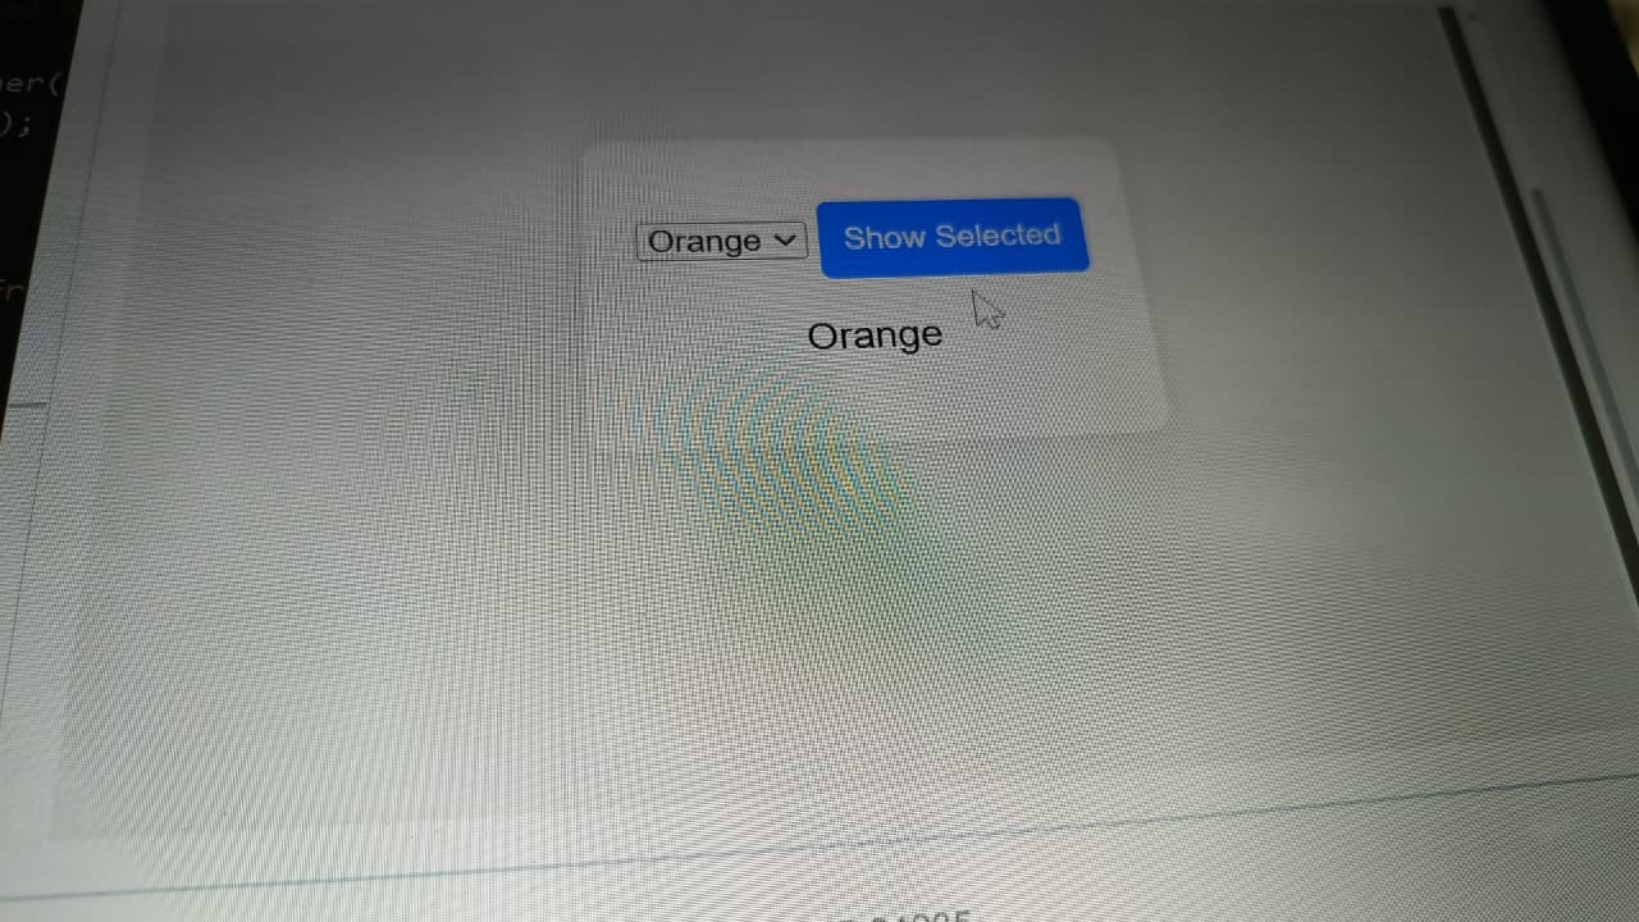
Orange
Show Selected
Orange

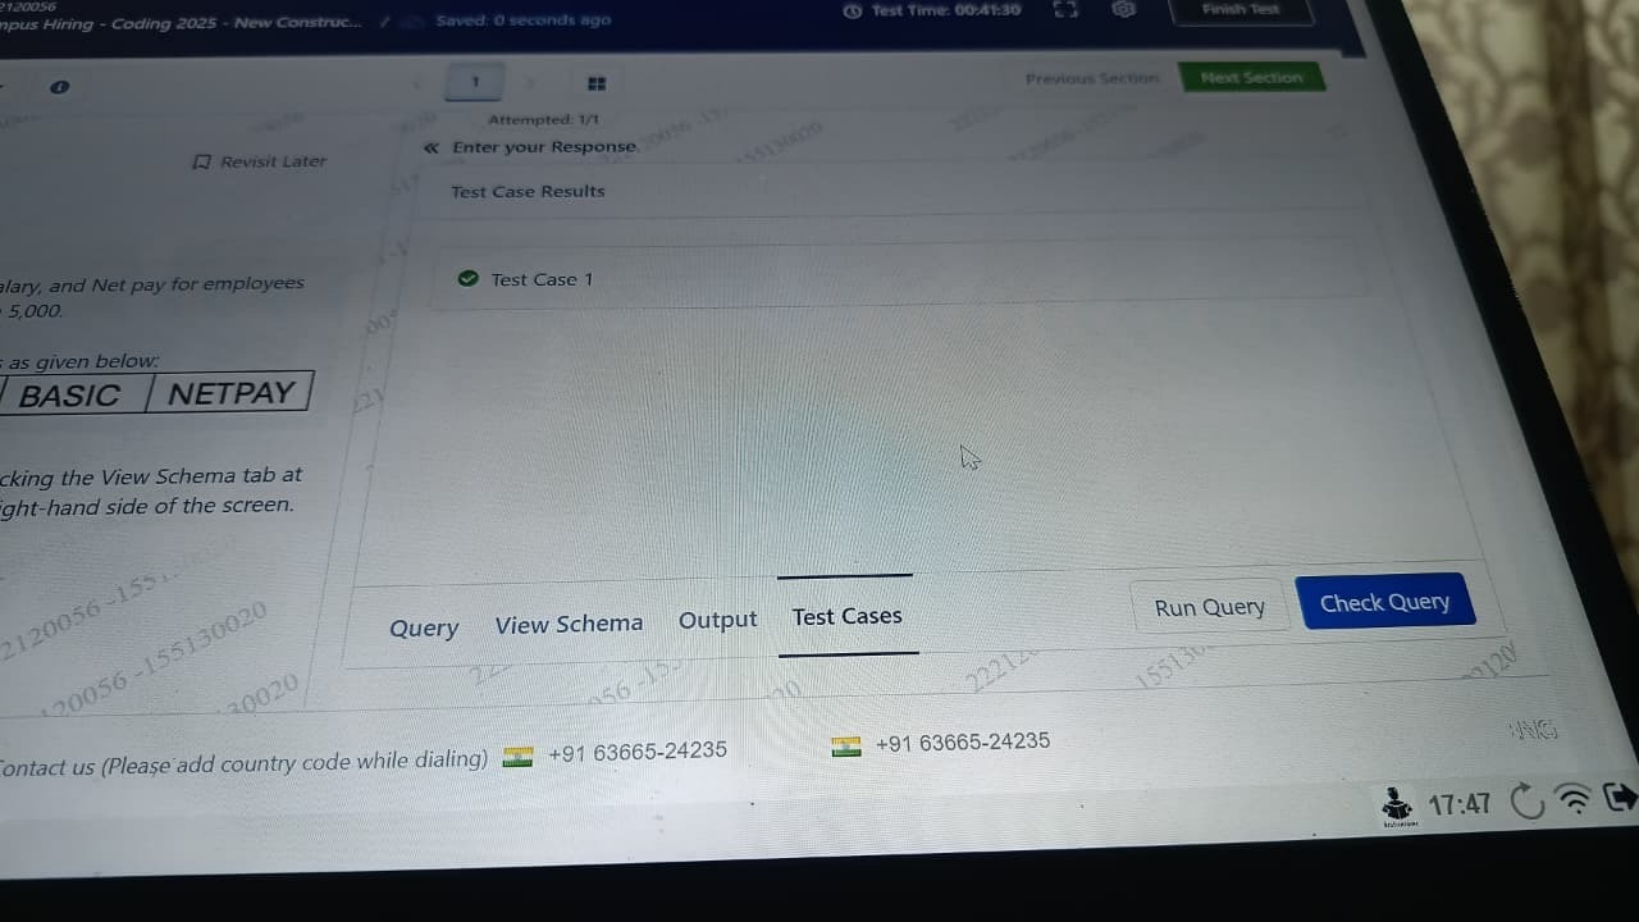
2120056
npus Hiring - Coding 2025 - New Construc...
Saved: 0 seconds ago
Test Time: 00:41:30
Finish Test
Previous Section
Next Section
1
Attempted: 1/1
Revisit Later
Enter your Response
Test Case Results
Test Case 1
alary, and Net pay for employees
5,000.
as given below:
BASIC
NETPAY
cking the View Schema tab at
ight-hand side of the screen.
Query
View Schema
Output
Test Cases
Run Query
Check Query
Contact us (Please add country code while dialing)
+91 63665-24235
+91 63665-24235
17:47

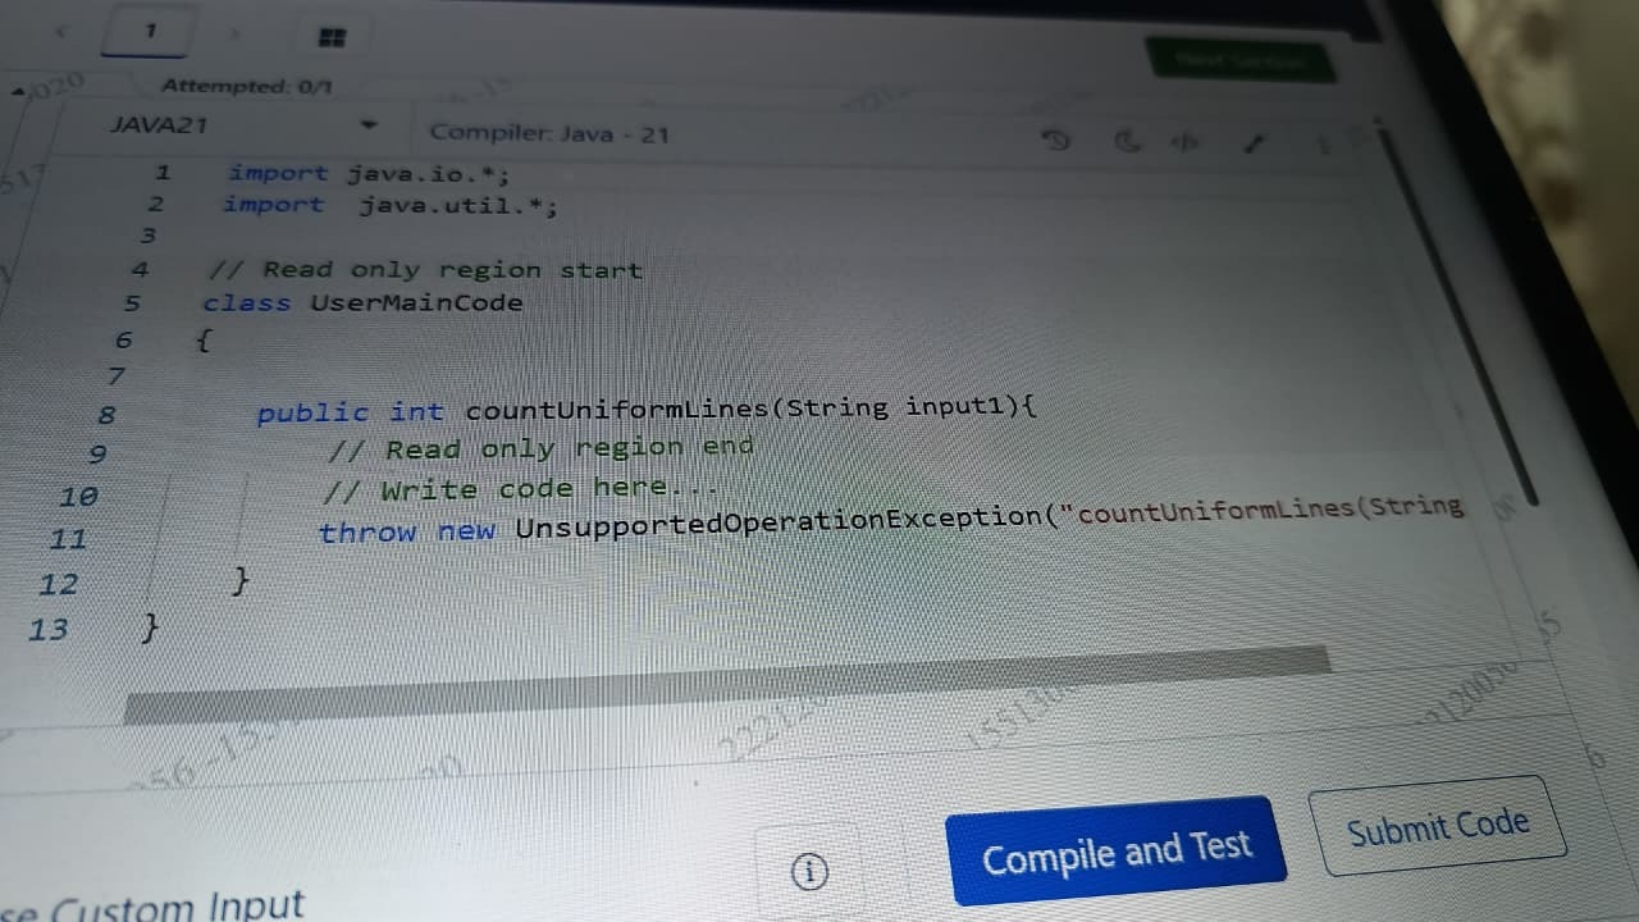
1
Attempted: 0/1
JAVA21
Compiler: Java - 21
1 import java.io.*;
2 import java.util.*;
3
4 // Read only region start
5 class UserMainCode
6 {
7
8 public int countUniformLines(String input1){
9 // Read only region end
10 // Write code here...
11 throw new UnsupportedOperationException("countUniformLines(String
12 }
13 }
Compile and Test
Submit Code
Custom Input

1. Backend

a a a
a b b
b c c

The uniform row is row 0 where all the characters are 'aaa' but there are no uniform columns. Hence, **1** is returned as the output.

Example 2:

input1 : *ccee*

Output : *2*

Explanation:

Here, the string S is "ccee". The string has length 4 which means N = 2. So, the grid will be:

c c
e e

Both the rows are uniform but there are no uniform columns. Hence, ***2*** *is returned as the output.*

1

Attempted: 0/1

CSHARP12 Compiler: .NET 8

```
1   using System;
2   using System.Collections.Generic;
3
4   //Read only region start
5   public class UserMainCode
6   {
7       public int countUniformLines(string i
8       {
9           //Read only region end
10          //Write code here
11          throw new NotImplementedExcept
12      }
13  }
```

Use Custom Input

Need Help? Contact us (Please add country code while dialing) +91 63665-24235

Secure Exam Browser 1.6.8

Revisit Later

t square. Let N be
build an N x N grid
t, top to bottom)
lumns in the grid
w or column are
alue
nns.

rs (a-z).

d

Use Custom Input

Compile and Test

Submit Code

Code Execution | Code History

0/10 - Graded Test Cases Failed

Basic Test Case 1

Basic Test Case 2

e add country code while dialing) +91 63665-24235 +91 63665-24235

Revisit Later

square. Let N be
build an N x N grid
top to bottom)
mns in the grid
or column are
ue
s.

(a-z).

Attempted: 1/1

IntelliSense is loading

Use Custom Input

Compile and Test

Submit Code

Code Execution | Code History

0/2 - Sample Test Cases Failed

Default Test Case 1

Default Test Case 2

dd country code while dialing) +91 63665-24235 +91 63665-24235

Java

```java
import java.io.*;
import java.util.*;

class UserMainCode {

    public int countUniformLines(String input1) {
        int l = input1.length();
        int n = (int) Math.sqrt(l);
        int ans = 0;

        boolean[] u = new boolean[n];
        Arrays.fill(u, true);

        for (int i = 0; i < n; i++) {
            boolean r = true;
            char s = input1.charAt(i * n);

            for (int j = 0; j < n; j++) {
                char c = input1.charAt(i * n + j);
                if (c != s) r = false;
                if (u[j] && c != input1.charAt(j)) u[j] = false;
            }
            if (r) ans++;
        }

        for (boolean b : u) if (b) ans++;

        return ans;
    }
}
```