

Q1 -Release notes

Code Blame 56 lines (51 loc) · 1.52 KB

```
1  name: Q1 Release Notes
2
3  on:
4    workflow_dispatch:
5      inputs:
6        version:
7          description: "Version number"
8          type: string
9          required: true
10         default: "1.0.0"
11        release_type:
12          description: "Type of release"
13          type: choice
14          required: true
15          default: patch
16          options:
17            - patch
18            - minor
19            - major
20
21  jobs:
22    prepare:
23      runs-on: ubuntu-latest
24      outputs:
25        build_tag: ${ steps.tag.outputs.build_tag }
26        build_date: ${ steps.date.outputs.build_date }
27      steps:
28        - id: tag
29          name: Compute build tag
30          run: |
31            TAG="v${ inputs.version }-${ inputs.release_type }-${ github.run_number }"
32            echo "build_tag=$TAG" >> "$GITHUB_OUTPUT"
33
34        - id: date
35          name: Compute build date
36          run: echo "build_date=$(date +%F)" >> "$GITHUB_OUTPUT"
37
38    announce:
39      needs: prepare
40      runs-on: ubuntu-latest
41      steps:
42        - name: Print outputs
43          run: |
44            echo "Build tag: ${ needs.prepare.outputs.build_tag }"
45            echo "Build date: ${ needs.prepare.outputs.build_date }"
46
47        - name: Write summary
48          run: |
49          {
50            echo "| Field | Value |"
51            echo "|---|---|"
52            echo "| Version | ${ inputs.version } |"
53            echo "| Release type | ${ inputs.release_type } |"
54            echo "| Build tag | ${ needs.prepare.outputs.build_tag } |"
55            echo "| Build date | ${ needs.prepare.outputs.build_date } |"
56          } >> "$GITHUB_STEP_SUMMARY"
```

Actions

New workflow

All workflows

Caller Workflow

CI

Q1 Release Notes

Q2 Matrix Build

Reusable Workflow

Management

Caches

Attestations

Runners

Usage metrics

Performance metrics

Q1 Release Notes

q1-release-notess.yml

Filter workflow runs

...

1 workflow run

Event Status Branch Actor

This workflow has a workflow_dispatch event trigger.

Run workflow

Q1 Release Notes

Q1 Release Notes #1: Manually run by DevRushi-engg

Use workflow from

Branch: main

Version number

1.0.0

Type of release

patch

Run workflow

← Q1 Release Notes

Q1 Release Notes #2

Re-run all jobs

...

Summary

All jobs

prepare

announce

Run details

Usage

Workflow file

Manually triggered now

Status

Total duration

Artifacts

DevRushi-engg 1e2e1b4 main Success 15s -

q1-release-notess.yml

on: workflow_dispatch

prepare 3s

announce 3s

[- +]

announce summary

...

Field	Value
Version	1.0.0
Release type	patch
Build tag	v1.0.0-patch-2
Build date	2026-09-06

Job summary generated at run-time

Q2-Matrix Build

-- DevRushi-engg

Fix YAML syntax and update workflow steps ✓

Code

Blame

56 lines (45 loc) · 1.24 KB

```
1  name: Q2 Matrix Build
2
3  on:
4    push:
5      branches: [main]
6      workflow_dispatch:
7
8  jobs:
9    build:
10     runs-on: ${ matrix.os }
11     timeout-minutes: 10
12     strategy:
13       fail-fast: false
14       matrix:
15         os: [ubuntu-latest, ubuntu-22.04]
16         node: [18, 20]
17         exclude:
18           - os: ubuntu-22.04
19             node: 18
20     steps:
21       - uses: actions/checkout@v4
22
23       - uses: actions/setup-node@v4
24         with:
25           node-version: ${ matrix.node }
26
27       - name: Print versions
28         run: |
29           node -v
30           npm -v
31
32       - name: Write Report
33         run: |
34           mkdir -p out
35           echo "Runner OS: $Runner_OS", "Node Version: ${ matrix.node }", "Runner Number: ${ github.run_number }"
36             > "out/report-${ matrix.os }-${ matrix.node }.txt"
37
38       - uses: actions/upload-artifact@v4
39         with:
40           name: report-${ matrix.os }-${ matrix.node }
41           path: out/report-${ matrix.os }-${ matrix.node }.txt
42
43     collect:
44       needs: build
45       if: always()
46       runs-on: ubuntu-latest
47       steps:
48         - uses: actions/download-artifact@v4
49           with:
50             path: all-reports
51
52         - name: Print all reports
53           run: find all-reports -type f -exec cat {} \;
```

← Q2 Matrix Build

Q2 Matrix Build #17

Re-run all jobs

Summary

All jobs

build (ubuntu-latest, 18)

build (ubuntu-latest, 20)

build (ubuntu-22.04, 20)

collect

Run details

Usage

Workflow file

Manually triggered 1 minute ago

Status

Total duration

Artifacts

DevRushi-engg → 167e1b4 main

Success

25s

3

q2-matrix-build.yml

on: workflow_dispatch

Main: build

3 jobs completed

Show all jobs


collect

4s

Show more

Artifacts				
Produced during runtime				
Name		Size	Digest	
 report-ubuntu-22.04-20		168 Bytes	sha256:7803f730...	  
 report-ubuntu-latest-18		170 Bytes	sha256:2d0d7932...	  
 report-ubuntu-latest-20		170 Bytes	sha256:7dbd9760...	  

Q6. Reusable Action

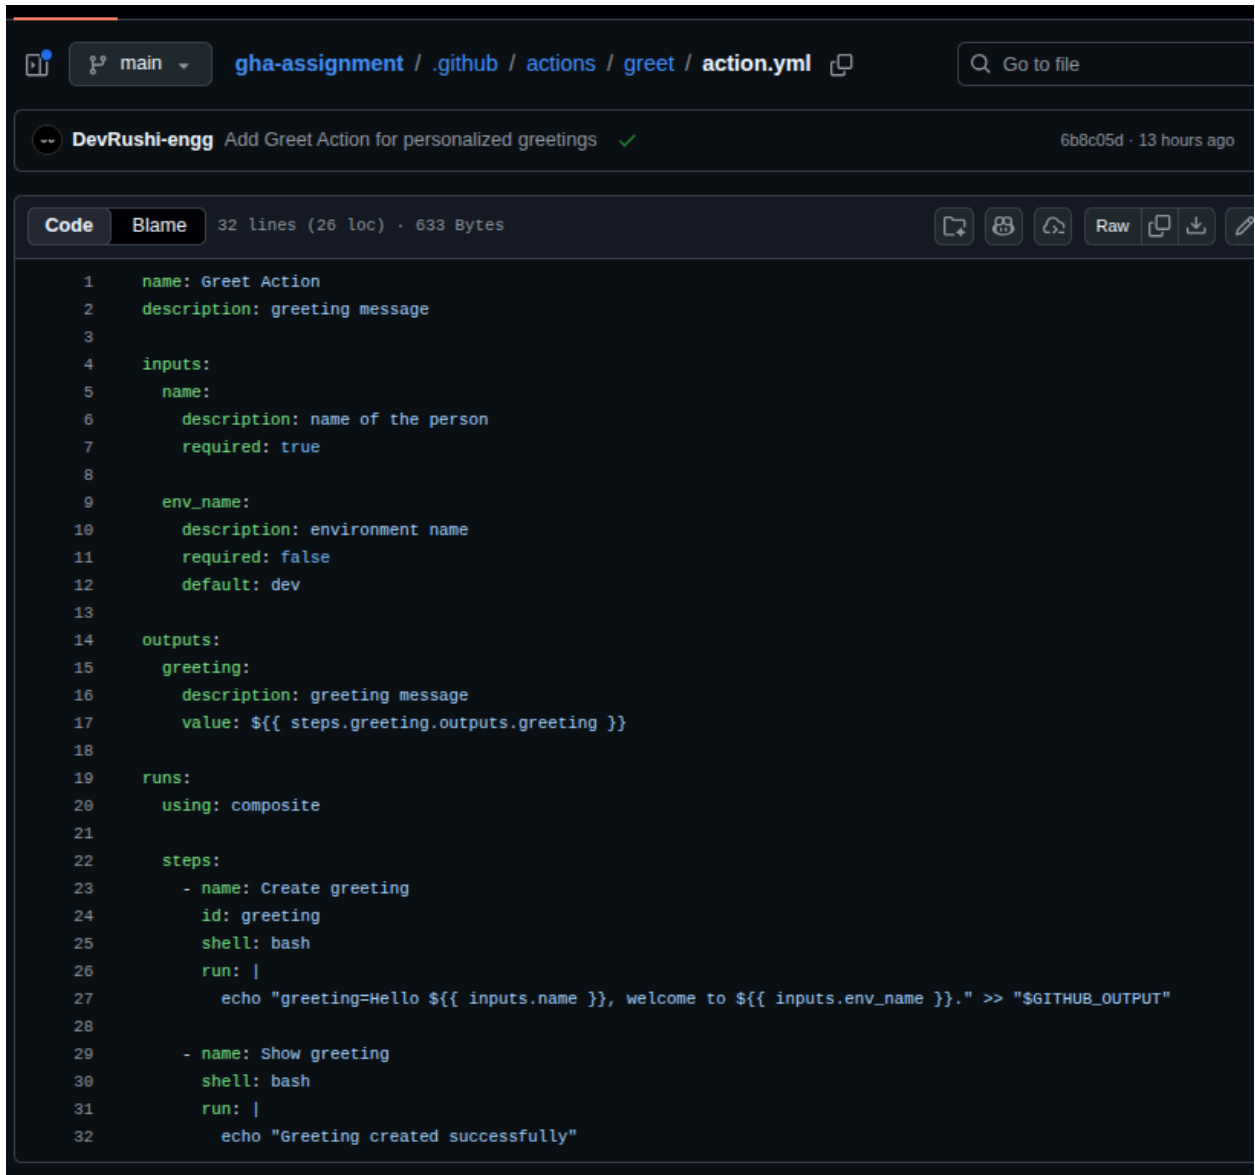

The screenshot shows a GitHub Actions workflow file named `action.yml` in a code editor. The file is located at `gha-assignment / .github / actions / greet / action.yml`. The editor shows the file's content, which defines a reusable action named "Greet Action". The workflow includes inputs for `name` and `env_name`, and outputs for `greeting`. The `runs` section uses a composite runner to execute two steps: "Create greeting" and "Show greeting".

```
1  name: Greet Action
2  description: greeting message
3
4  inputs:
5    name:
6      description: name of the person
7      required: true
8
9    env_name:
10     description: environment name
11     required: false
12     default: dev
13
14  outputs:
15    greeting:
16      description: greeting message
17      value: ${ steps.greeting.outputs.greeting }
18
19  runs:
20    using: composite
21
22    steps:
23      - name: Create greeting
24        id: greeting
25        shell: bash
26        run: |
27          echo "greeting=Hello ${ inputs.name }, welcome to ${ inputs.env_name }." >> "$GITHUB_OUTPUT"
28
29      - name: Show greeting
30        shell: bash
31        run: |
32          echo "Greeting created successfully"
```

<> Code Issues Pull requests Agents Actions Projects Wiki Security and compliance

main gha-assignment / .github / workflows / q6-caller.yml View runs Go to file

DevRushi-engg Add q6-caller workflow for dev and prod environments 3e85

Code Blame 16 lines (13 loc) · 243 Bytes

```
1  name: Caller workflow
2
3  on:
4    workflow_dispatch:
5
6  jobs:
7    dev:
8      uses: ../github/workflows/q6-reusable.yml
9      with:
10       target_env: dev
11
12    prod:
13      needs: dev
14      uses: ../github/workflows/q6-reusable.yml
15      with:
16       target_env: prod
```

gha-assignment / .github / workflows / q6-reusable.yml View runs Go to

DevRushi-engg Create q6-reusable.yml ✓ 3

Code Blame 28 lines (23 loc) · 585 Bytes

```
1  name: Reusable Workflow
2
3  on:
4    workflow_call:
5      inputs:
6        target_env:
7          required: true
8          type: string
9
10   jobs:
11     deploy:
12       runs-on: ubuntu-latest
13
14       steps:
15         - name: check repository
16           uses: actions/checkout@v4
17
18         - name: running the greet action
19           id: greet
20           uses: ../github/actions/greet
21           with:
22             name: GitHub User
23             env_name: ${ inputs.target_env }
24
25         - name: Show greeting
26           run: |
27             echo "${ steps.greet.outputs.greeting }"
28             echo "Deploying to ${ inputs.target_env }... done."
```

← Caller Workflow

✓ Caller Workflow #2

Re-run all jobs



Summary

All jobs



- ✓ dev
- ✓ deploy
- ✓ prod
- ✓ deploy



Run details

Usage

Workflow file

Manually triggered now

Status

Total duration

Artifacts

DevRushi-engg 1e2e1b4 main

Success

16s

-

q6-caller.yml

on: workflow_dispatch




Annotations

2 warnings

- ⚠ dev / deploy
Node.js 20 is deprecated. The following actions target Node.js 20 but are being f...
[Show more](#)
- ⚠ prod / deploy
Node.js 20 is deprecated. The following actions target Node.js 20 but are being f...
[Show more](#)

Q3. q3-fix-me

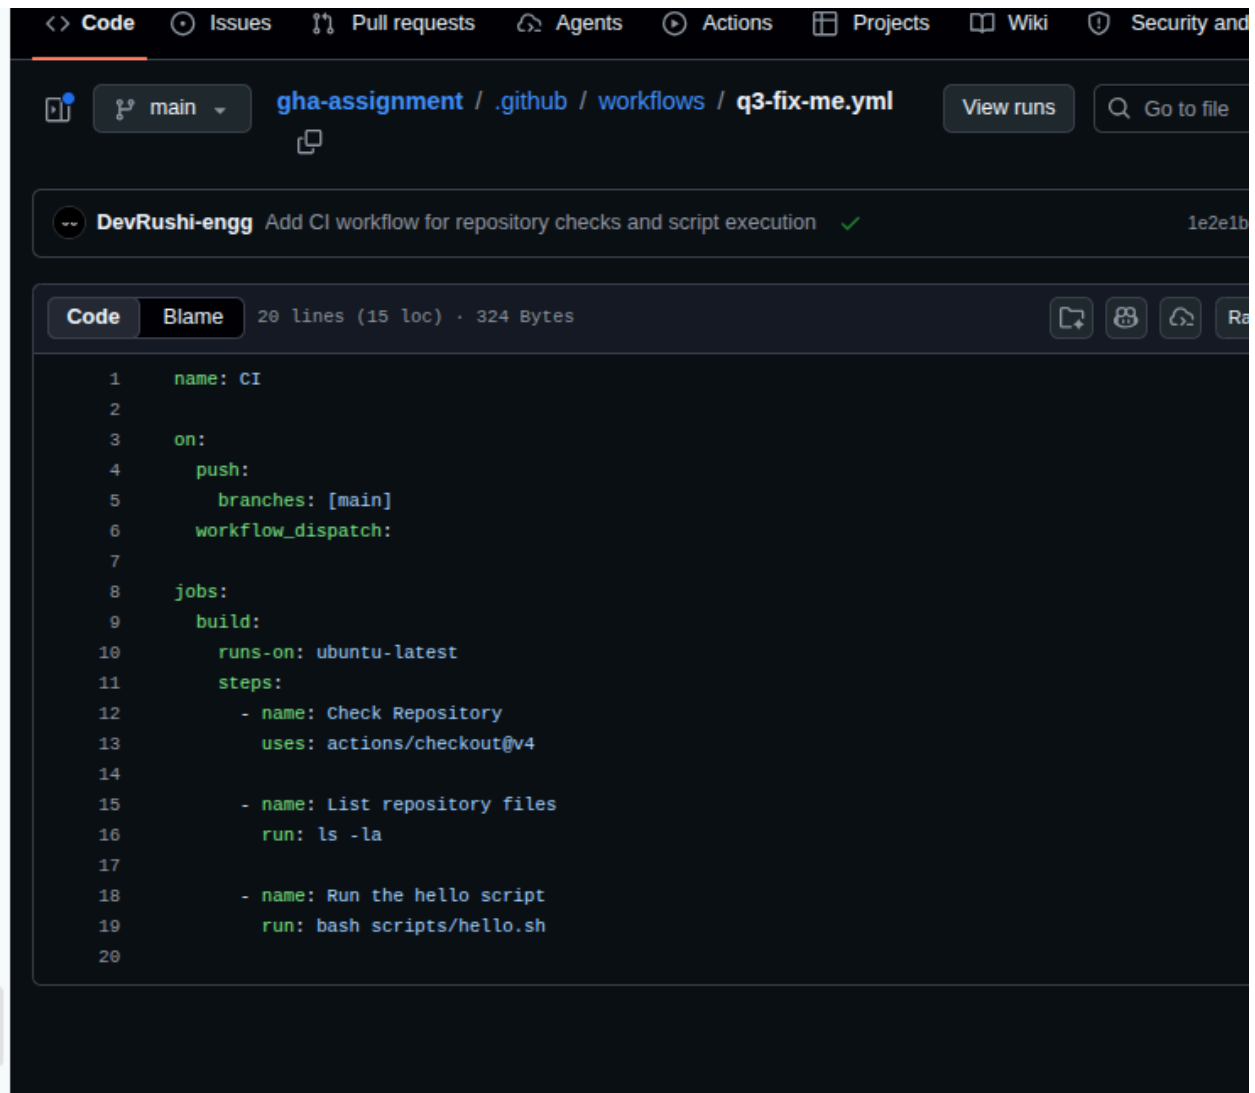

```
1  name: CI
2
3  on:
4    push:
5      branches: [main]
6    workflow_dispatch:
7
8  jobs:
9    build:
10     runs-on: ubuntu-latest
11     steps:
12       - name: Check Repository
13         uses: actions/checkout@v4
14
15       - name: List repository files
16         run: ls -la
17
18       - name: Run the hello script
19         run: bash scripts/hello.sh
20
```

Bugs	Changes
push,workflow	Missing the colon
Check Repository uses: actions/checkout@v4 Place after: Run script hello.sh	Place and define before listing
runs-on : ubuntu-latest-large No - ubuntu-latest-large	run-on: ubuntu-latest

Q4. q4-fix-me

DevRushi-engg Add conditional deployment workflow for GitHub Actions ✓39a389d · 1 minute agoHistory

CodeBlame34 lines (27 loc) · 681 Bytes

RawDownloadEdit

```
1  name: Conditional Deploy
2
3  on:
4    workflow_dispatch:
5      inputs:
6        environment:
7          description: Target environment
8          required: true
9          default: staging
10         type: choice
11         options:
12           - staging
13           - production
14
15  env:
16    APP_NAME: demo-app
17
18  jobs:
19    deploy:
20      runs-on: ubuntu-latest
21
22      if: ${ inputs.environment == 'production' }}
23
24      steps:
25        - name: Print target
26          run: echo "Deploying $APP_NAME to ${ inputs.environment }"
27
28        - name: Guarded step
29          if: ${ env.APP_NAME == 'demo-app' }}
30          run: echo "guard passed"
31
32        - name: Notify
33          if: ${ success() || failure() }}
34          run: echo "finished"
```


Github Repo:-

<https://github.com/DevRushi-engg/gha-assignment>

