


Q1. The Variable That will not set


```
rushi@rushi:~/scripts$ nano greet.sh
rushi@rushi:~/scripts$ chmod u+x greet.sh
rushi@rushi:~/scripts$ bash greet.sh
Hello Alice
rushi@rushi:~/scripts$
```

```
GNU nano 7.2 greet.s
#!/bin/bash
NAME="Alice"
echo "Hello $NAME"
```

Q2 . The Argument That Vanishes

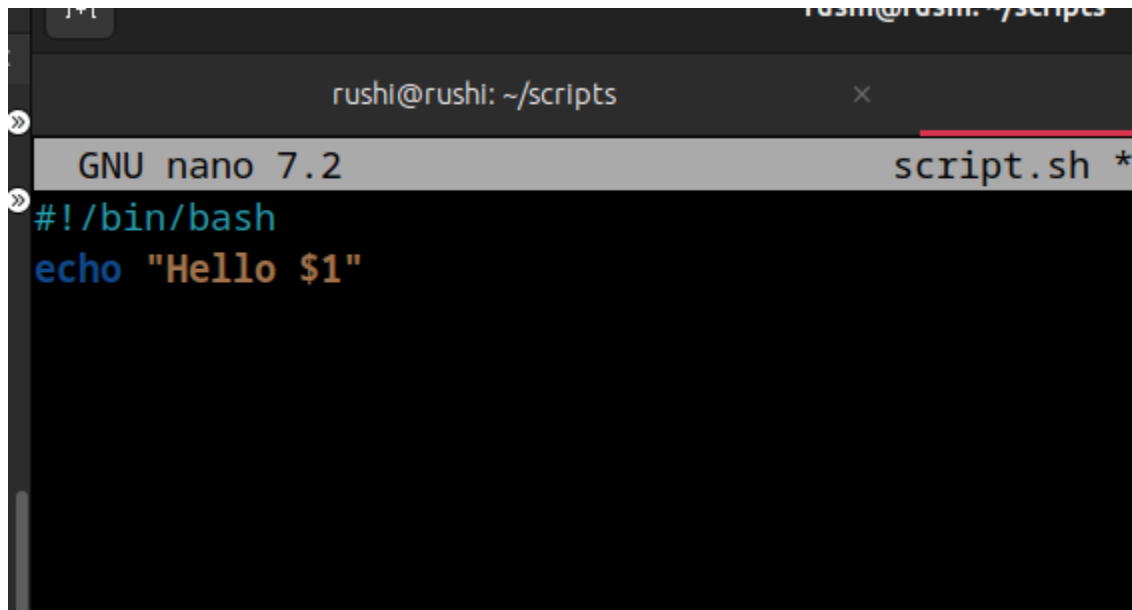


```
rushi@rushi: ~/scripts
GNU nano 7.2 script.sh *
#!/bin/bash
echo "Hello $1"
```

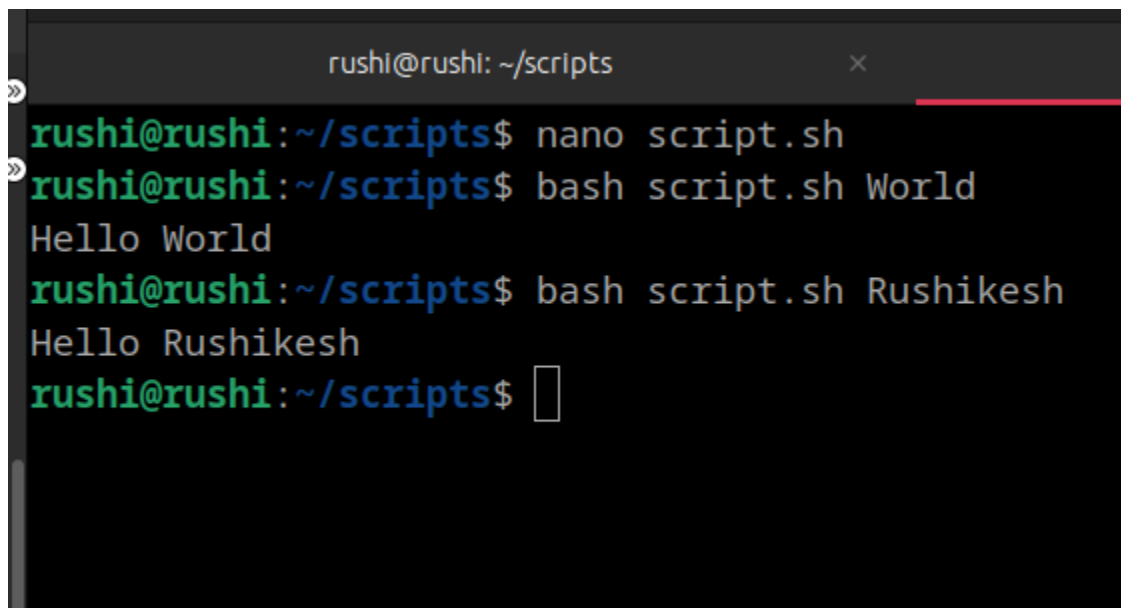


```
rushi@rushi: ~/scripts
rushi@rushi:~/scripts$ nano script.sh
rushi@rushi:~/scripts$ bash script.sh World
Hello World
rushi@rushi:~/scripts$ bash script.sh Rushikesh
Hello Rushikesh
rushi@rushi:~/scripts$
```

Q3. The Test That Crashes

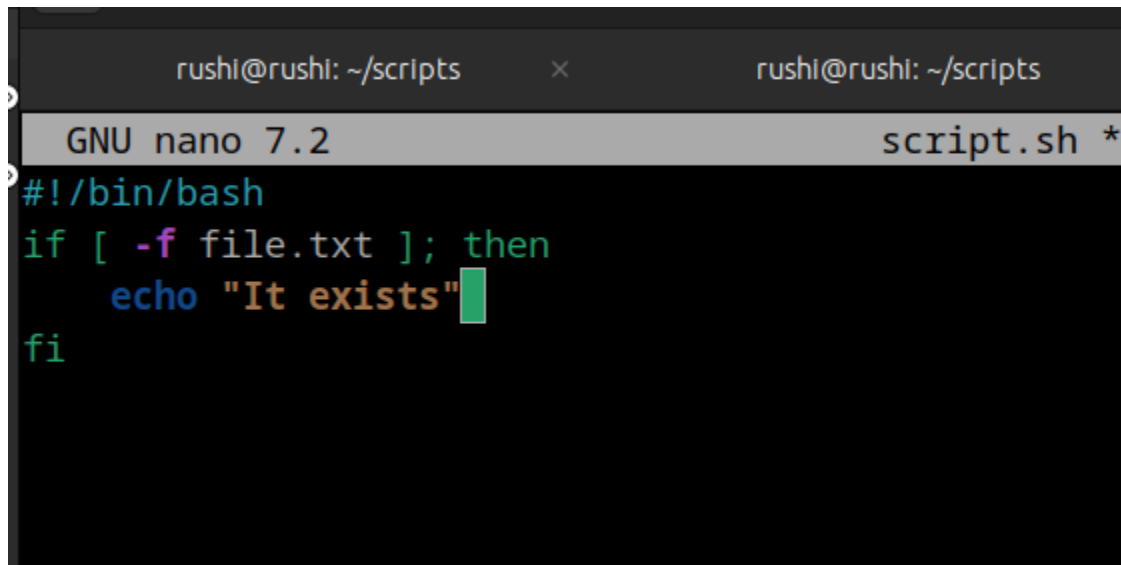

A screenshot of a terminal window showing the nano 7.2 editor editing a file named script.sh. The editor's title bar shows 'rushi@rushi: ~/scripts' and 'script.sh *'. The code inside the editor is a bash script that checks if a file named file.txt exists and prints 'It exists' if it does.

```
#!/bin/bash
if [ -f file.txt ]; then
    echo "It exists"
fi
```

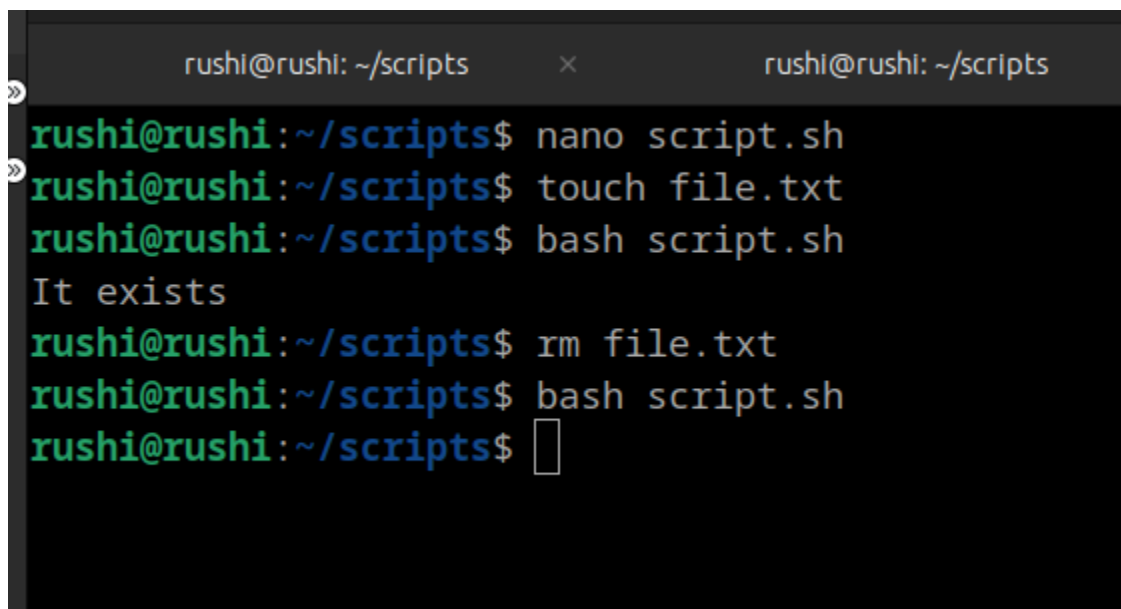

A screenshot of a terminal window showing the execution of the script. The user runs 'nano script.sh', 'touch file.txt', and 'bash script.sh'. The output is 'It exists'. Then the user runs 'rm file.txt' and 'bash script.sh' again, which results in no output.

```
rushi@rushi:~/scripts$ nano script.sh
rushi@rushi:~/scripts$ touch file.txt
rushi@rushi:~/scripts$ bash script.sh
It exists
rushi@rushi:~/scripts$ rm file.txt
rushi@rushi:~/scripts$ bash script.sh
rushi@rushi:~/scripts$
```

```
rushi@rushi: ~/scripts × rushi@rushi: ~/scripts
GNU nano 7.2 script.sh
#!/bin/bash
if [ -f file.txt ]; then
    echo "It exists"
else
    echo "Not exists"
fi
```

```
rushi@rushi:~/scripts$ rm file.txt
rushi@rushi:~/scripts$ bash script.sh
rushi@rushi:~/scripts$ nano script.sh
rushi@rushi:~/scripts$ bash script.sh
Not exists
rushi@rushi:~/scripts$
```

Q4. The Comparison that is always wrong

```
rushi@rushi: ~/scripts ×    rushi@rushi: ~/scripts ×    rushi@rushi:
rushi@rushi:~/scripts$ nano script.sh
rushi@rushi:~/scripts$ bash script.sh
big
rushi@rushi:~/scripts$ nano script.sh
rushi@rushi:~/scripts$ ls
10  greet.sh  script.sh
rushi@rushi:~/scripts$
```

```
rushi@rushi: ~/scripts ×    rushi@rushi: ~/scripts ×    rushi@rushi:
GNU nano 7.2                script.sh *
#!/bin/bash
count=15
if [ $count -gt 10 ]; then
    echo "big"
fi
```

```
rushi@rushi:~/scripts$ rm 10
rushi@rushi:~/scripts$ nano script.sh
rushi@rushi:~/scripts$ bash script.sh
big
rushi@rushi:~/scripts$ ls
greet.sh  script.sh
rushi@rushi:~/scripts$
```

Q5. The Loop that runs once

```
rushi@rushi:~/scripts$ nano script.sh
rushi@rushi:~/scripts$ bash script.sh
*.txt
rushi@rushi:~/scripts$
```

```
GNU nano 7.2 script.sh
#!/bin/bash
for f in *.txt; do
    echo "$f"
done
```

```
rushi@rushi:~/scripts$ nano script.sh
rushi@rushi:~/scripts$ bash script.sh
*.txt
rushi@rushi:~/scripts$ nano script.sh
rushi@rushi:~/scripts$ touch a.txt b.txt && bash script.sh
a.txt
b.txt
rushi@rushi:~/scripts$
```

Q6. The Loops that never ends

```
GNU nano 7.2 script.sh
#!/bin/bash
i=1
while [ $i -le 3 ]; do
    echo "$i"
    i=$((i+1))
done

rushi@rushi:~/scripts$ nano
rushi@rushi:~/scripts$ nano script.sh
rushi@rushi:~/scripts$ bash script.sh
1
2
3
rushi@rushi:~/scripts$
```

Q7. The Sum that is not a sum

```
rushi@rushi:~/scripts$ nano script.sh
rushi@rushi:~/scripts$ bash script.sh
3+4
rushi@rushi:~/scripts$
```

```
GNU nano 7.2 script.sh
#!/bin/bash
a=3
b=4
echo $((a+b))
```

```
rushi@rushi:~/scripts$ nano script.sh
rushi@rushi:~/scripts$ bash script.sh
7
rushi@rushi:~/scripts$
```