

EXPERIMENT NO. 7

MOTION ESTIMATION USING OPTICAL FLOW ALGORITHMS

IN VIDEO SEQUENCES

Name : Dev Sharma

UID : CU24250269

Course : B.Tech CSE

Section : CSE "A"

Roll No. : 17

AIM

To implement optical flow algorithms for estimating the motion of objects between consecutive video frames and analyze motion patterns for dynamic scene understanding using Python and OpenCV

GitHub link :- https://github.com/DevSharma1912/Computer_vision/tree/main/ComputerVision/Experiment7

STEP 1: IMPORT REQUIRED LIBRARIES

```
import cv2
import numpy as np
import matplotlib.pyplot as plt
from tkinter import Tk
from tkinter.filedialog import askopenfilename
```

STEP 2: UPLOAD VIDEO FROM COMPUTER

```
from google.colab import files

print("Please upload a video file (e.g., .mp4, .avi, .mov).")
uploaded = files.upload()

if not uploaded:
    print("No file uploaded.")
    exit()

video_filename = next(iter(uploaded)) # Get the name of the first uploaded file
print(f"Video file '{video_filename}' uploaded successfully.")
```

Please upload a video file (e.g., .mp4, .avi, .mov).
Choose Files | Animals bei... shorts.mp4
Animals being funny part 3 shorts.mp4(video/mp4) - 291026773 bytes, last modified: 7/7/2026 - 100% done
Saving Animals being funny part 3 shorts.mp4 to Animals being funny part 3 shorts (1).mp4
Video file 'Animals being funny part 3 shorts (1).mp4' uploaded successfully.

STEP 3: READ TWO CONSECUTIVE VIDEO FRAMES

```
import cv2
import numpy as np # Added numpy import for robustness

video = cv2.VideoCapture(video_filename)

if not video.isOpened():
    print(f"Error: Could not open video file '{video_filename}'. Please ensure it's a valid video format and that the upload cell was executed correctly.")
    exit()

ret1, frame1 = video.read()
ret2, frame2 = video.read()

video.release()

if not ret1 or not ret2:
    print("Unable to read two consecutive frames from the video. The video might be too short, corrupted, or not a valid video file.")
    exit()

# Convert frames to grayscale

gray1 = cv2.cvtColor(
    frame1,
    cv2.COLOR_BGR2GRAY
)

gray2 = cv2.cvtColor(
    frame2,
    cv2.COLOR_BGR2GRAY
)
```

STEP 4: DISPLAY CONSECUTIVE FRAMES

```
plt.figure(figsize=(10, 5))

plt.subplot(1, 2, 1)
plt.imshow(
```

```

    cv2.cvtColor(frame1, cv2.COLOR_BGR2RGB)
)
plt.title("First Frame")
plt.axis("off")

plt.subplot(1, 2, 2)
plt.imshow(
    cv2.cvtColor(frame2, cv2.COLOR_BGR2RGB)
)
plt.title("Second Frame")
plt.axis("off")

plt.tight_layout()
plt.show()

```



STEP 5: LUCAS-KANADE SPARSE OPTICAL FLOW

```

# Detect good feature points in the first frame

feature_params = dict(
    maxCorners=100,
    qualityLevel=0.3,
    minDistance=7,
    blockSize=7
)

points_old = cv2.goodFeaturesToTrack(
    gray1,
    mask=None,
    **feature_params
)

if points_old is None:
    print("No feature points detected.")
    exit()

# Lucas-Kanade parameters

lk_params = dict(
    winSize=(15, 15),
    maxLevel=2,
    criteria=(
        cv2.TERM_CRITERIA_EPS |
        cv2.TERM_CRITERIA_COUNT,
        10,
        0.03
    )
)

# Calculate optical flow

points_new, status, error = cv2.calcOpticalFlowPyrLK(
    gray1,
    gray2,
    points_old,
    None,
    **lk_params
)

# Select successfully tracked points

good_new = points_new[status == 1]
good_old = points_old[status == 1]

```

STEP 6: VISUALIZE LUCAS-KANADE MOTION VECTORS

```

lucas_kanade = frame2.copy()

for new, old in zip(good_new, good_old):

    x_new, y_new = new.ravel()
    x_old, y_old = old.ravel()

    x_new = int(x_new)
    y_new = int(y_new)

    x_old = int(x_old)
    y_old = int(y_old)

    # Draw motion arrow

    cv2.arrowedLine(
        lucas_kanade,
        (x_old, y_old),
        (x_new, y_new),
        (255, 0, 0),
        2,
        tipLength=0.3
    )

    # Draw feature point

    cv2.circle(
        lucas_kanade,
        (x_new, y_new),
        4,
        (0, 255, 0),
        -1
    )

# Display Lucas-Kanade result

plt.figure(figsize=(8, 6))

plt.imshow(
    cv2.cvtColor(
        lucas_kanade,
        cv2.COLOR_BGR2RGB
    )
)

plt.title("Lucas-Kanade Sparse Optical Flow")
plt.axis("off")
plt.show()

```

Lucas-Kanade Sparse Optical Flow



STEP 7: FARNEBACK DENSE OPTICAL FLOW

```

# Calculate dense optical flow

flow = cv2.calcOpticalFlowFarneback(
    gray1,
    gray2,
    None,
    0.5,
    3,
    15,
    3,
    5,
    1.2,
    0
)

```

STEP 8: CALCULATE MOTION MAGNITUDE AND DIRECTION

```

magnitude, angle = cv2.cartToPolar(
    flow[..., 0],
    flow[..., 1]
)

```

STEP 9: CREATE COLOR-CODED FARNEBACK OPTICAL FLOW

```

hsv = np.zeros_like(frame1)

hsv[..., 1] = 255

# Direction of motion

hsv[..., 0] = (
    angle * 180 / np.pi / 2
)

# Magnitude of motion

hsv[..., 2] = cv2.normalize(
    magnitude,
    None,
    0,
    255,
    cv2.NORM_MINMAX
)

# Convert HSV to BGR

farneback = cv2.cvtColor(
    hsv,
    cv2.COLOR_HSV2BGR
)

```

STEP 10: DISPLAY FARNEBACK DENSE OPTICAL FLOW

```


plt.figure(figsize=(8, 6))

plt.imshow(
    cv2.cvtColor(
        farneback,
        cv2.COLOR_BGR2RGB
    )
)

plt.title("Farneback Dense Optical Flow")
plt.axis("off")
plt.show()

```

Farneback Dense Optical Flow

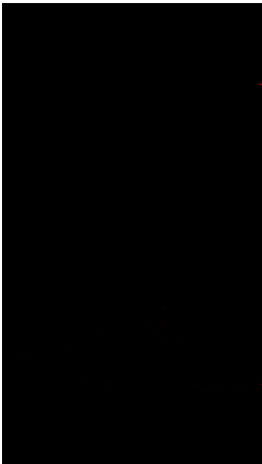

STEP 11: COMPARISON OF OPTICAL FLOW METHODS

```

plt.figure(figsize=(12, 6))

plt.subplot(1, 2, 1)

plt.imshow(
    cv2.cvtColor(
        lucas_kanade,
        cv2.COLOR_BGR2RGB
    )
)

plt.title("Lucas-Kanade Sparse Optical Flow")
plt.axis("off")

plt.subplot(1, 2, 2)

```

```
plt.imshow(
    cv2.cvtColor(
        farneback,
        cv2.COLOR_BGR2RGB
    )
)


plt.title("Farneback Dense Optical Flow")
plt.axis("off")

plt.tight_layout()
plt.show()
```

Lucas-Kanade Sparse Optical Flow



Farneback Dense Optical Flow

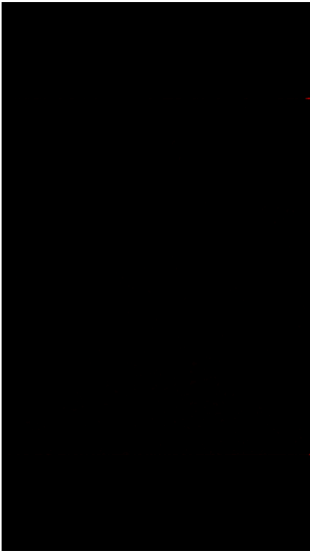

Q1. What is Optical Flow? Mention its applications.

Optical Flow is the apparent motion of pixels or objects between consecutive video frames.

Applications include:

Object tracking Video surveillance Autonomous navigation Motion analysis Human action recognition

Q2. Explain the basic principle of the Lucas-Kanade method.

Lucas-Kanade estimates the motion of selected feature points between two consecutive frames.

It assumes that the motion of pixels inside a small local window is approximately similar.

Q3. Differentiate between Dense and Sparse Optical Flow.

Sparse Optical Flow calculates motion only for selected feature points.

Dense Optical Flow calculates motion for almost every pixel.

Therefore, Sparse Optical Flow is generally faster, while Dense Optical Flow provides more complete motion information.

Q4. Compare Lucas-Kanade and Farneback Optical Flow.

Lucas-Kanade is a Sparse Optical Flow method that tracks selected feature points.

Farneback is a Dense Optical Flow method that estimates motion over the entire image.

Lucas-Kanade is generally simpler and faster, while Farneback provides more detailed motion information.

Q5. What assumptions are made in Optical Flow estimation?

The main assumptions are:

Brightness of a moving point remains approximately constant. Motion between consecutive frames is relatively small. Motion is locally smooth or consistent.

Q6. What factors affect the accuracy of Optical Flow?

The accuracy can be affected by:

Lighting changes Camera movement Object speed Image noise Motion blur Occlusion Texture of the object Video frame rate

Q7. List five real-world applications of Optical Flow.

Autonomous driving Video surveillance Object tracking Human action recognition Motion detection and analysis

Q8. Why are grayscale images commonly used for Optical Flow?

Grayscale images contain intensity information that is sufficient for most optical flow calculations.

Using grayscale also reduces computational complexity because three color channels do not need to be processed separately.

Q9. What are the limitations of Optical Flow methods?

Limitations include:

Sensitivity to lighting changes Difficulty with very large motion Problems caused by occlusion Motion blur can reduce accuracy Camera motion can affect estimation Textureless regions are difficult to track

Q10. How does Optical Flow contribute to autonomous driving, surveillance, and action recognition?

In autonomous driving, Optical Flow helps estimate the movement of vehicles, pedestrians and other objects.

In surveillance, it helps detect and track moving objects.

In action recognition, motion patterns can be used to identify activities and human movements.

Result

Thus, Lucas-Kanade Sparse Optical Flow and Farneback Dense Optical Flow were successfully implemented using Python and OpenCV.

Motion between consecutive video frames was estimated and visualized using motion vectors and color-coded optical flow.

The two methods were compared based on their motion estimation approach, computational complexity and applications.