

GE23131-Programming Using C-2024



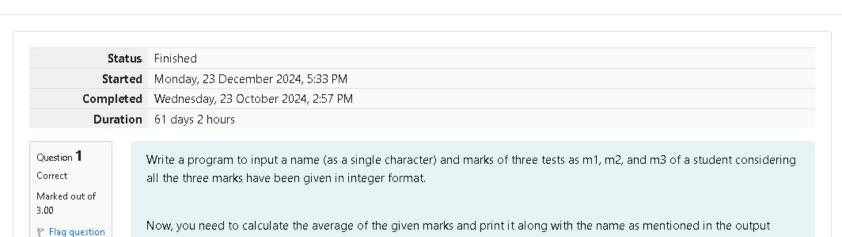

All the test marks are in integers and hence calculate the average in integer as well. That is, you need to print the integer part of the average only and neglect the decimal part.

Input format:

format section.

Line 1: Name(Single character)

Line 2: Marks scored in the 3 tests separated by single space.

Output format:

First line of output prints the name of the student.

Second line of the output prints the average mark.

Constraints

```
Marks for each student lie in the range 0 to 100 (both inclusive)
Sample Input 1:
Α
346
Sample Output 1:
Α
4
Sample Input 2:
Τ
738
Sample Output 2:
Τ
6
Answer: (penalty regime: 0 %)
   1 #include(stdio.h>
   2 int main()
   3 - {
       char ch;
   4
   5 int a,b,c,avg;
       scanf("%c\n",&ch);
   6
       scanf("%d%d%d",&a,&b,&c);
       a vg = (a+b+c)/3;
   8
       printf("%c\n",ch);
   9
```

10

11 12 13 printf("%d",avg);
return 0;



Passed all tests! 🗸

Question **2**Correct

Marked out of 5.00

Flag question

Some C data types, their format specifiers, and their most common bit widths are as follows:

- Int ("%d"): 32 Bit integer
- Long ("%ld"): 64 bit integer
- · Char ("%c"): Character type
- Float ("%f"): 32 bit real value
- Double ("%lf"): 64 bit real value

Reading

To read a data type, use the following syntax:

scanf("`format_specifier`", &val)

For example, to read a character followed by a double:

char ch;

double d;

scant("%c %lf", &ch, &d);

For the moment, we can ignore the spacing between format specifiers.

Printing

To print a data type, use the following syntax:

printf("`format_specifier`", val)

For example, to print a character followed by a double:

char ch = 'd';

double d = 234.432;

printf("%c %lf", ch, d);

Note: You can also use *cin* and *cout* instead of *scanf* and *printf*; however, if you are taking a million numbers as input and printing a million lines, it is faster to use *scanf* and *printf*.

Input Format

Input consists of the following space-separated values: int, long, char, float, and double, respectively.

Output Format

Print each element on a new line in the same order it was received as input. Note that the floating point value should be correct up to 3 decimal places and the double to 9 decimal places.

Sample Input

3 12345678912345 a 334.23 14049.30493

Sample Output

3

12345678912345

ě

334.230

14049.304930000

Explanation

Print int 3,

followed by long 12345678912345,

followed by char a,

followed by float 334.23,

followed by double 14049.30493.

Answer: (penalty regime: 0 %)

```
#include(stdio.h)
2
   int main()
3 → {
       int a;
4
5
       long b;
6
       char c;
7
       float d;
       double e;
8
       scanf("%d %ld %c %f %lf",&a,&b,&c,&d,&e);
9
       printf("%d\n%ld\n%c\n%.3f\n%.9lf\n",a,b,c,d,e);
10
       return 0;
11
12 }
```

	Input	Expected	Got	
~	3 12345678912345 a 334.23 14049.30493	3	3	~
		12345678912345	12345678912345	
		a	a	
		334.230	334.230	
		14049.304930000	14049.304930000	

Passed all tests! 🗸

Question **3**

Correct

Marked out of 7.00

F Flag question

Write a program to print the ASCII value and the two adjacent characters of the given character.

Input

Ε

Output

```
1 #include<stdio.h>
2 int main()
3 + {
```

```
4
     char a;
5
   scanf("%c",&a);
6
   printf("%d\n",a);
    printf("%c %c",a-1,a+1);
7
8
     return 0;
9 }
```

	Input	Expected	Got	
~	Е	69	69	~
		DF	DF	

Passed all tests! 🗸

69 DΕ

Answer: (penalty regime: 0 %)