


EXP:24

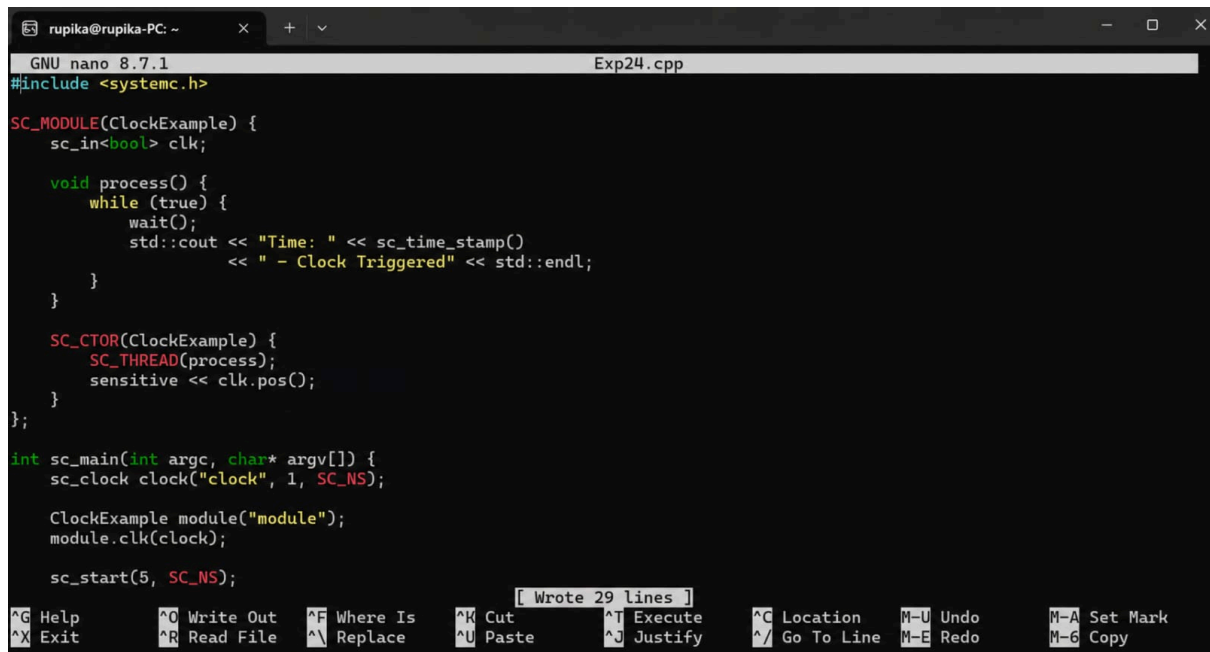

```
GNU nano 8.7.1 Exp24.cpp
#include <systemc.h>

SC_MODULE(ClockExample) {
    sc_in<bool> clk;

    void process() {
        while (true) {
            wait();
            std::cout << "Time: " << sc_time_stamp()
                << " - Clock Triggered" << std::endl;
        }
    }

    SC_CTOR(ClockExample) {
        SC_THREAD(process);
        sensitive << clk.pos();
    }
};

int sc_main(int argc, char* argv[]) {
    sc_clock clock("clock", 1, SC_NS);

    ClockExample module("module");
    module.clk(clock);

    sc_start(5, SC_NS);
}
```

[Wrote 29 lines]

^G Help	^O Write Out	^F Where Is	^K Cut	^T Execute	^C Location	M-U Undo	M-A Set Mark
^X Exit	^R Read File	^N Replace	^U Paste	^J Justify	^_ Go To Line	M-E Redo	M-G Copy

rupika@rupika-PC: ~

×

+

▼

```
rupika@rupika-PC:~$ nano Exp24.cpp
```

```
rupika@rupika-PC:~$ g++ -o Exp24 Exp24.cpp -lsystemc
```

```
rupika@rupika-PC:~$ ./Exp24
```

```
SystemC 3.0.2-Accellera --- Nov  5 2025 12:44:46
```

```
Copyright (c) 1996-2025 by all Contributors,
```

```
ALL RIGHTS RESERVED
```

```
Time: 0 s - Clock Triggered
```

```
Time: 1 ns - Clock Triggered
```

```
Time: 2 ns - Clock Triggered
```

```
Time: 3 ns - Clock Triggered
```

```
Time: 4 ns - Clock Triggered
```

```
rupika@rupika-PC:~$ |
```