


Repository Boundaries

One typed, read-only adapter per configured dataset.

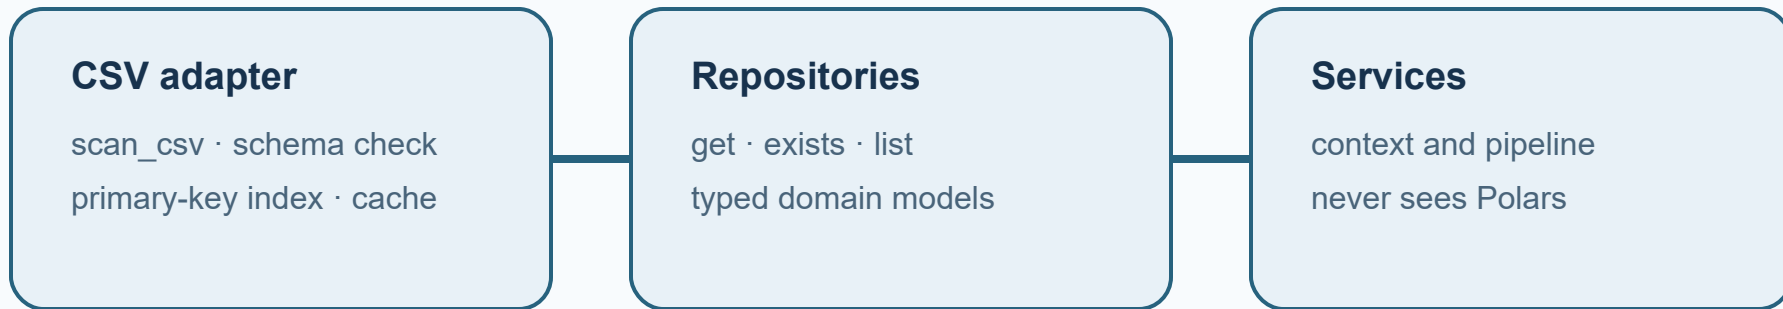

Caption: Repository isolation prevents raw tabular state from leaking into decision logic.