ITEC 235-940 System Administration


Red Hat Enterprise Command Line Interface

Introduction


Red Hat Enterprise Linux (RHEL) command line interface (CLI) provides a text interface for issuing commands to the RHEL system. The RHEL CLI is often referred to as the shell, terminal, console, or prompt. The RHEL follows the Filesystem Hierarchy Standard (FHS) for organizing files. The RHEL directory structure resembles an inverted tree, with the top of the tree represented as the root of the file directory. The tree branches represent subdirectories, and the leaves of the tree represent files. When viewing the file structure in the CLI, the root is represented by a forward slash character (/). Completing this lab will introduce you to the commands commonly used to navigate the RHEL CLI. The screen captures included in this lab are examples. Your results will be slightly different.

Lab


1. Start the RHEL virtual machine and login using your username and password.

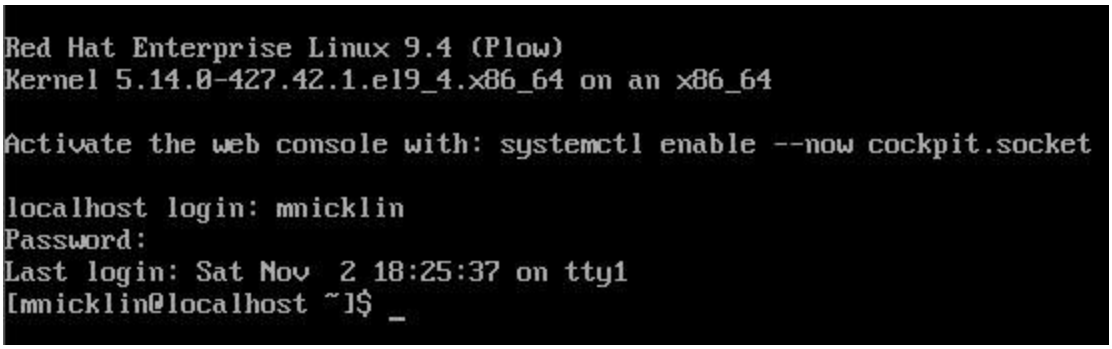

2. The substitute user command allows you to run commands using a different user account than the one currently logged in. When a user account is not specified, the substitute user command defaults to the root user account. Enter the **su** command followed by the root password. Notice that the prompt changes from $ to #.



3. Login to your Red Hat Subscription by entering the **`rhc connect`** command.

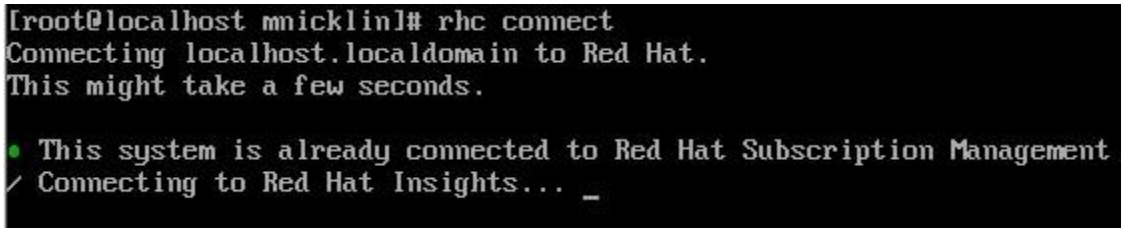

4. Update your RHEL system by entering the **`yum check-update`** command.

```
[root@localhost mnicklin]# yum check-update
Updating Subscription Management repositories.
Red Hat Enterprise Linux 9 for x86_64 - AppStream (RPMs)
```

5. Clear the console by entering the **`clear`** command.

6. Use the print working directory command to display the current directory. Enter the **`pwd`** command.

```
[root@localhost mnicklin]# pwd
/home/mnicklin
[root@localhost mnicklin]#
```

7. Move to the root directory by entering the **`cd /`** command.

```
[root@localhost mnicklin]# cd /
[root@localhost /]# _
```


8. Toggle between your home directory and root directory by entering the **`cd –`** command.

```
[root@localhost /]# cd -
/home/mnicklin
[root@localhost mnicklin]# cd -
/
[root@localhost /]# cd -
/home/mnicklin
[root@localhost mnicklin]# cd -
/
[root@localhost /]# _
```

9. Move to the root directory by entering the following command: **`cd /`**. Use the **`ls`** command to display a list of files and directories in the root directory.

```
[root@localhost mnicklin]# cd /
[root@localhost /]# ls
afs  bin  boot  dev  etc  home  lib  lib64  media  mnt  opt  proc
[root@localhost /]# _
```

10. Move to the fonts directory be entering the following command: **`cd etc/fonts`**. List the contents of the fonts directory by entering the **`ls`** command. Display the tree structure of the directory by entering the **`tree`** command.

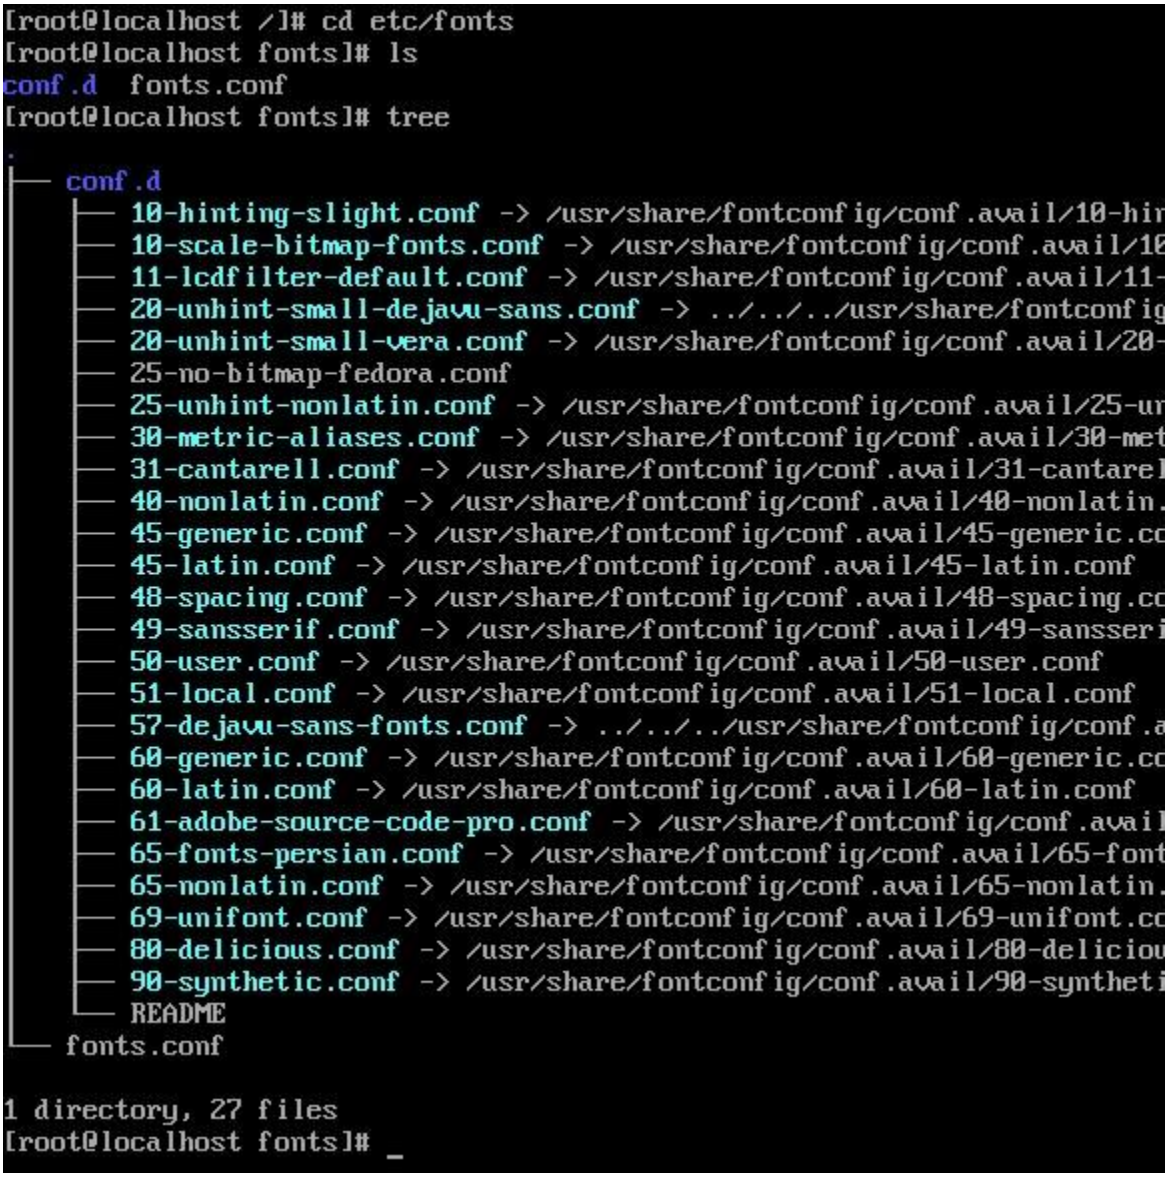

11. RHEL includes a complete set of manuals accessible from the CLI. Manual pages are viewed using the man command. Specific manual pages can be accessed by entering the man command followed by a specific command. Enter **`man ls`** to display the manual page for the ls command. Enter **q** to exit.

```
LS(1)

NAME
       ls - list directory contents

SYNOPSIS
       ls [OPTION]... [FILE]...

DESCRIPTION
       List information about the FILEs (the current directory by

       Mandatory arguments to long options are mandatory for short

       -a, --all
              do not ignore entries starting with .

       -A, --almost-all
              do not list implied . and ..

       --author
```

12. Return to the home directory by entering the **`cd home`** command. Enter the **`ls`** command to display the contents of the home directory. Locate your home directory. Move to your home directory using the **`cd`** command. For example, I entered cd mnicklin.

```
[root@localhost /]# cd home
[root@localhost home]# ls
mnicklin
[root@localhost home]# cd mnicklin
[root@localhost mnicklin]# _
```


13. View the system uptime using the **`uptime`** command.

```
[root@localhost home]# cd mnicklin
[root@localhost mnicklin]# uptime
 21:20:44 up  1:04,  1 user,  load average: 0.00, 0.00, 0.00
[root@localhost mnicklin]# _
```

14. Enter the **`history 30`** command to show the last thirty commands entered. Create a screen capture of the last thirty commands and upload it to the lab submission link.


[root@localhost mnicklin]# history 30
67 ls
68 tree
69 cd ..
70 ls
71 cd fonts
72 ls
73 tree
74 clear
75 cd /
76 cd etc/fonts
77 ls
78 tree
79 man ls
80 history
81 man history
82 history 20
83 history 30
84 clear
85 history 50
86 clear
87 cd ~
88 ls
89 cd home
90 cd /
91 cd home
92 ls
93 cd mnicklin
94 uptime
95 uname
96 history 30
[root@localhost mnicklin]# _

My Answer:

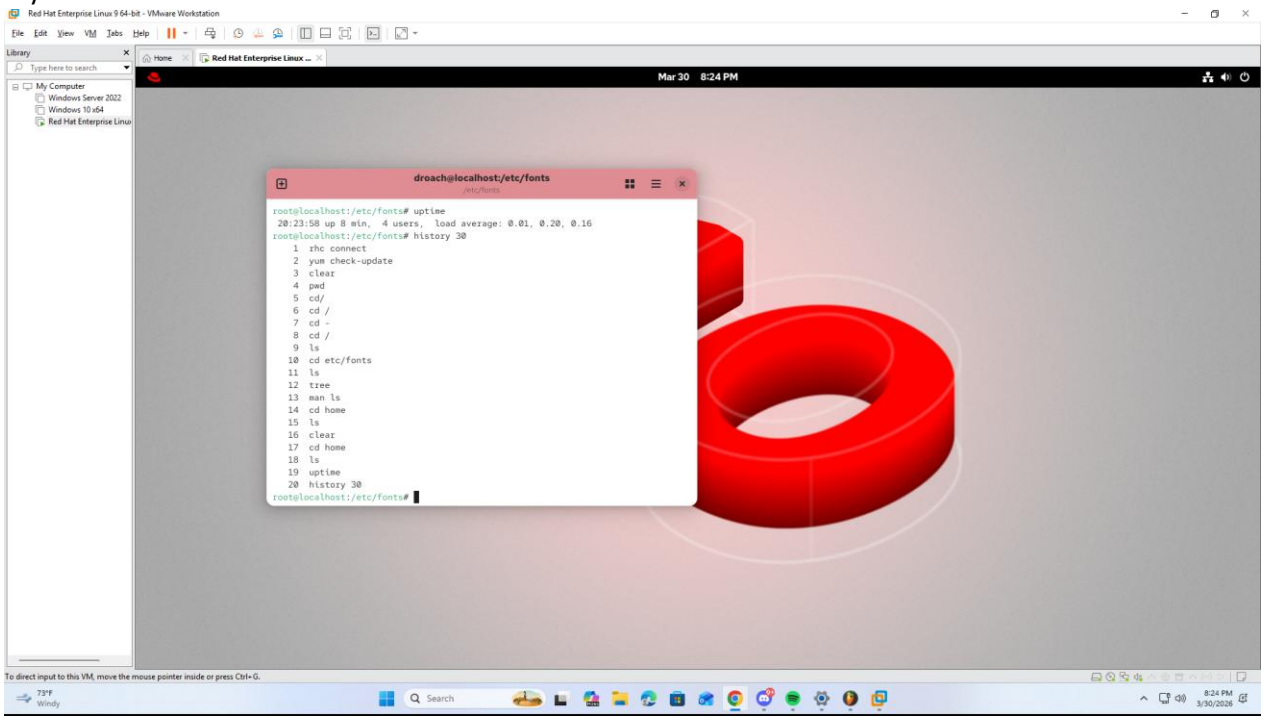

15. Use the **`poweroff`** command to shutdown your RHEL server.