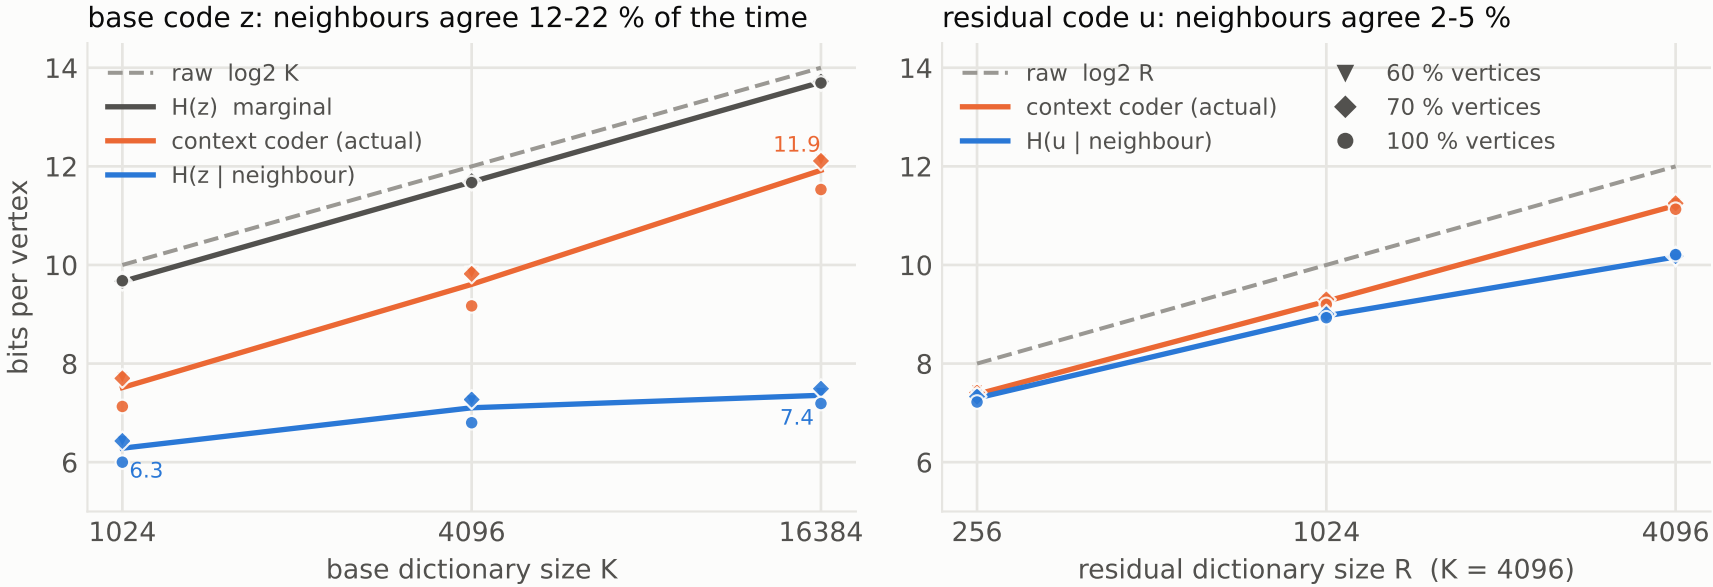

Room, stage2-v2 ctx format, vertex levels 60/70/100 % (80 % excluded: its sweep was coded with the v1 zstd coder). Marginal entropy H(z) sits at log2 K - 0.3: dictionary usage is uniform, there is no frequency skew to exploit. Conditioning on one mesh neighbour removes 3-6 bits from the base code (hit rate 0.12-0.22 vs 1e-3 to 1e-4 if independent, lift 100-780x) but under 1 bit from the residual code. H(z|nbr) at K=4096/16384 is a sparse estimate biased low; the K=1024 gap (coder 7.7 vs 6.4) is real headroom for a richer context.