

Anil Poonai

Github link for files and code: [https://github.com/DevonARP/DeepLearning\\_A2](https://github.com/DevonARP/DeepLearning_A2)

For question 1 I wrote out all my notes and work before writing them here, I'll add my work/notes at the end of each part for this question

Problem 1: Part A

$$L(w_1, w_2) = .5(aw_1^2 + bw_2^2)$$

$$\nabla L(w_1, w_2) = aw_1 + bw_2$$

$$\nabla^2 L(w_1, w_2) = a + b$$

I'm making  $a = 1$  and  $b = 2$  to keep the double derivate positive and keep the graph concave up so it has a minimum value.

$$\nabla^2 L(w_1, w_2) = a + b = 1 + 2 = 3$$

Now, we go back to the first derivative

$$\nabla L(w_1, w_2) = aw_1 + bw_2 = w_1 + 2w_2$$

I can use  $w_1 = -2$  and  $w_2 = 1$ , this gives the minimum value of 0.

References:

<https://study.com/learn/lesson/how-to-find-the-maximum-value-of-a-function.html#:~:text=We%20will%20set%20the%20first,will%20be%20a%20minimum%20value>

[https://www.ocf.berkeley.edu/~reinholz/ed/07fa\\_m155/lectures/second\\_derivative.pdf](https://www.ocf.berkeley.edu/~reinholz/ed/07fa_m155/lectures/second_derivative.pdf)

a.  $L(w_1, w_2) = .5(aw_1^2 + bw_2^2)$   
 $\nabla L(w_1, w_2) = aw_1 + bw_2$   
 $\nabla \nabla L(w_1, w_2) = a + b$   
 $\quad \quad \quad = a + b$   
making  $a=1$  &  $b=2$   
to keep it concave  
up & have a  
min value  
 $= 1 + 2$   
 $\rightarrow \quad \quad \quad = w_1 + 2w_2$   
 $\quad \quad \quad w_1 = -2 \quad w_2 = 1$

## Problem 1: Part B

$P_i$  is a dropout layer, I'll be using  $N$  for the dropout rate

Have to grab the derivative of  $L$  with respect to the corresponding weight

$W_i(t+1) = w_i(t) - N(\partial L / \partial w_i)$  This is being rearranged to follow the dropout rate argument formula

$$W_1 = w_1(t) - N a w_1(t) = w_1(t)(1 - N a) = p_1 w_1(t)$$

$$W_2 = w_2(t) - N b w_2(t) = w_2(t)(1 - N b) = p_2 w_2(t)$$

$$P_1 = 1 - N a$$

$$P_2 = 1 - N b$$

References:

<https://towardsdatascience.com/simplified-math-behind-dropout-in-deep-learning-6d50f3f47275#:~:text=In%20Keras%2C%20the%20dropout%20rate,can%20adversely%20affect%20the%20training.>

6.  $p$  is a dropout layer  
using  $N$  for dropout rate

$$w_i(t+1) = w_i(t) - N \frac{\partial L}{\partial w_i}$$

$\hookrightarrow$  following dropout rate argument formula  $\hookrightarrow N a w_1$   
 $N b w_2$

$$w_1 = w_1(t) - N a w_1(t)$$
$$w_1(t)(1 - N a) = p_1 w_1(t)$$
$$w_2 = w_2(t) - N b w_2(t)$$
$$w_2(t)(1 - N b) = p_2 w_2(t)$$
$$p_1 = 1 - N a$$
$$p_2 = 1 - N b$$

### Problem 1: Part C

It converges when the gradient of the cost function becomes 0.

In this case both  $|p_1|$  and  $|p_2|$  need to be less than 1

We can rearrange that to be  $|1 - Na|$  and  $|1 - Nb|$  need to both be less than 1


Then we can make it  $|Na|$  and  $|Nb|$  both need to be less than 2

And we can end off with  $|N|$  needs to be less than both  $2/a$  and  $2/b$ .

References:

<https://www.cs.umd.edu/~djacobs/CMSC426/GradientDescent.pdf>

<https://www.cs.ubc.ca/~schmidtm/Courses/540-W18/L4.pdf>

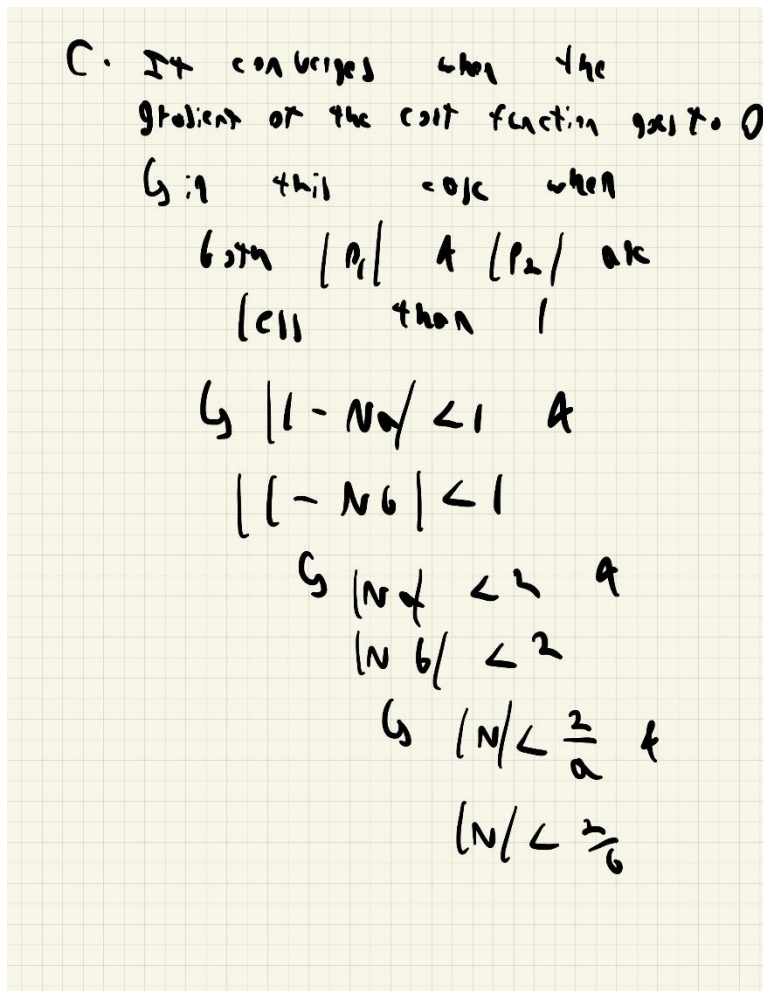

### Problem 1: Part D

When either  $a/b$  or  $b/a$  is very large, in the first case  $w_2$  will take significantly longer to converge as it will need more updates because  $N$  would be very small. Same can be said in the second case just with  $w_1$ .

d. When  $a/b$  is very large,  
 $w_2$  will take significantly  
longer to converge as  
it will need more  
updates as  $N$  would  
be very small. Same  
can be said for  
 $b/a$ , when it is  
very large just with  
 $w_1$  taking a  
longer time now

## Problem 2: Part A

I would use the Sobel filter, which uses two kernels, one for the horizontal edges and one for the vertical edges.

Horizontal edges

-1	0	1
-2	0	2
1	0	1

Vertical edges

-1	-2	-1
0	0	0
1	2	1

This works by looking for string changes in the image. The higher the sum of the numbers after the convolution, the more likely there is an edge there and the positive or negative sign indicates the direction of the edge. The output from both filters are then combined to see all the edges detected.

References:

[https://www.projectrhea.org/rhea/index.php/An\\_Implementation\\_of\\_Sobel\\_Edge\\_Detection](https://www.projectrhea.org/rhea/index.php/An_Implementation_of_Sobel_Edge_Detection)

<https://automaticaddison.com/how-the-sobel-operator-works/>

[https://www.cs.auckland.ac.nz/compsci373s1c/PatricesLectures/Edge%20detection-Sobel\\_2up.pdf](https://www.cs.auckland.ac.nz/compsci373s1c/PatricesLectures/Edge%20detection-Sobel_2up.pdf)

## Problem 2: Part B

I'm going to use a Box Blur Kernel because I end up mentioning the Gaussian Blur Kernel in Part D.

1	1	1
1	1	1
1	1	1

This works by giving each pixel the same weight and adding them all up then dividing by 9 in this case at the end, this makes it so that the output is a relative value to the other output points after the kernel as it adds up all of the points in a region and averages it out for every region.

References:

<https://medium.com/hackernoon/cv-for-busy-developers-convolutions-5c984f216e8c#:~:text=The%20convolution%20of%20a%20Gaussian,the%20kernel%20values%20is%2016.>

### Problem 2: Part C

I'm combining some concepts from regular sharpening and edge detection for this.

0	-1	0
0	2	0
0	-1	0

We're focusing on the horizontal sharpening by grabbing the middle row of the region, this focuses on the center primarily and the middle row right after, with no focus on anything else as those values on the filter are zero.

References:

<https://medium.com/@boelsmaxence/introduction-to-image-processing-filters-179607f9824a>

[https://en.wikipedia.org/wiki/Kernel\\_\(image\\_processing\)](https://en.wikipedia.org/wiki/Kernel_(image_processing))

### Problem 2: Part D

I'm going to use a Gaussian Blur Kernel, this can also be used to blur an image.

1	2	1
2	4	2
1	2	1

This works by giving the pixel near the center of the kernel more weight than the ones on the edges, this helps mute noise as the box blur would treat all the points with the same weight.

References:

<https://medium.com/hackernoon/cv-for-busy-developers-convolutions-5c984f216e8c#:~:text=The%20convolution%20of%20a%20Gaussian,the%20kernel%20values%20is%2016.>

### Problem 3: Part A

Jaccard similarity is supposed to find how similar 2 sets of data are, so it has to range between 0, no correlation at all, and 1, they are the exact same set. It can't be out of that range since the extremes would be either 0 and 1 for no relation and 100% relation, any number between 0 and 1 would represent a partial match with the higher the value being the higher match percentage. This can also be described as the IOU being the division of the overlap of the predicted and ground truth, so it can only be between the ranges 0 and 1.

$IOU = |A \cap B| / |A \cup B|$  #A is the predicted and B is the ground truth

B counts for all true positives, false negatives, and false positives while A counts for true positives

### Problem 3: Part B

IOU isn't differentiable inherently as it ranges from 0 to 1, which means it can't differentiate between distances from how similar sets are as you would need all real numbers available. It also isn't differentiable in the case mentioned because the parameters have no influence on it's gradient, so in the case of the top left to bottom right corners, the gradients are just going to be 0. Also, using the equation mentioned above indicates that the gradients would just be 0 everywhere as well, the parameters don't play a role in IOU calculation, it also is because the IOU metric itself isn't continuous natively.

### Problem 4:

Code and answers will be below in an attached pdf to this document

### Problem 5: Part A

Code and answers will be below in an attached pdf to this document

## Problem 5: Part B

Code will be below in an attached pdf to this document

The backbone model is slightly better regarding loss after training as it has a lower loss and loss classifier but when looking at the example image it actually picks up 1 less person than the finetuning model but it is more confident in its predictions. This also leads to the IOU metric being an indicator, with the higher values being given towards the finetuning model, meaning it actually ends up matching more objects with that model. I'm not saying which is better as that's depends on what outcome is wanted but I do like the results from the finetuning a model a bit more, the IOU metric helps a lot.

### Finetuning model

Epoch: [9] [59/60] eta: 0:00:00 lr: 0.000005 loss: 0.1793 (0.1891) loss\_classifier: 0.0253 (0.0269)  
loss\_box\_reg: 0.0378 (0.0417) loss\_mask: 0.1127 (0.1169) loss\_objectness: 0.0004 (0.0006)  
loss\_rpn\_box\_reg: 0.0029 (0.0030) time: 0.5977 data: 0.0096 max mem: 3778

### IoU metric: bbox

Average Precision (AP) @[ IoU=0.50:0.95 | area= all | maxDets=100 ] = 0.839

Average Precision (AP) @[ IoU=0.50 | area= all | maxDets=100 ] = 0.979

Average Precision (AP) @[ IoU=0.75 | area= all | maxDets=100 ] = 0.931

Average Precision (AP) @[ IoU=0.50:0.95 | area= small | maxDets=100 ] = 0.355

Average Precision (AP) @[ IoU=0.50:0.95 | area=medium | maxDets=100 ] = 0.659

Average Precision (AP) @[ IoU=0.50:0.95 | area= large | maxDets=100 ] = 0.860

Average Recall (AR) @[ IoU=0.50:0.95 | area= all | maxDets= 1 ] = 0.424

Average Recall (AR) @[ IoU=0.50:0.95 | area= all | maxDets= 10 ] = 0.877


Average Recall (AR) @[ IoU=0.50:0.95 | area= all | maxDets=100 ] = 0.877

Average Recall (AR) @[ IoU=0.50:0.95 | area= small | maxDets=100 ] = 0.467

Average Recall (AR) @[ IoU=0.50:0.95 | area=medium | maxDets=100 ] = 0.825

Average Recall (AR) @[ IoU=0.50:0.95 | area= large | maxDets=100 ] = 0.894



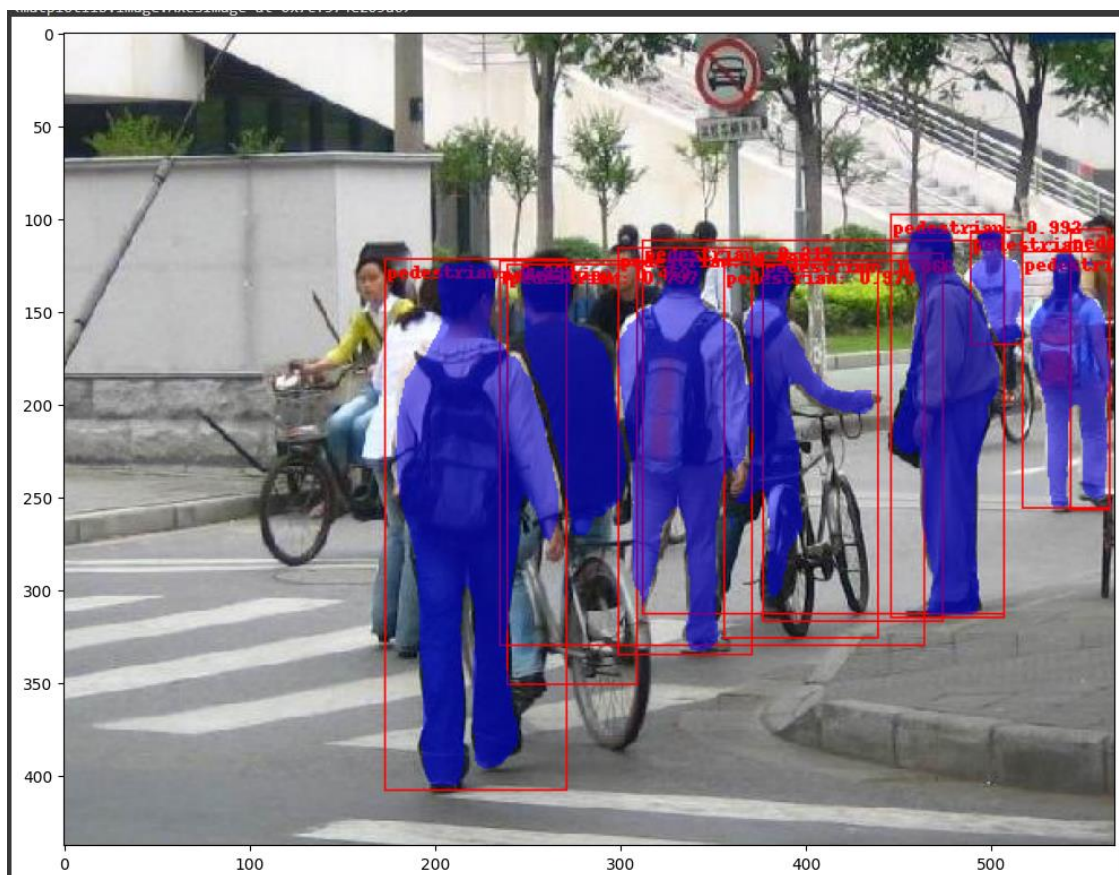

```

▶ pred_labels
[
  'pedestrian: 0.995',
  'pedestrian: 0.994',
  'pedestrian: 0.992',
  'pedestrian: 0.988',
  'pedestrian: 0.979',
  'pedestrian: 0.797',
  'pedestrian: 0.453',
  'pedestrian: 0.215',
  'pedestrian: 0.089',
  'pedestrian: 0.066',
  'pedestrian: 0.055'
]

[14] pred_boxes
tensor([[299, 116, 371, 335],
        [173, 122, 271, 408],
        [446, 98, 507, 315],
        [517, 118, 564, 256],
        [356, 125, 439, 326],
        [239, 125, 309, 351],
        [235, 123, 464, 330],
        [312, 112, 507, 313],
        [489, 107, 517, 168],
        [377, 119, 474, 317],
        [543, 106, 564, 257]], device='cuda:0')

```

## Backbone Model

Epoch: [9] [59/60] eta: 0:00:00 lr: 0.000005 loss: 0.1621 (0.1808) loss\_classifier: 0.0219 (0.0247)  
loss\_box\_reg: 0.0326 (0.0377) loss\_mask: 0.1089 (0.1143) loss\_objectness: 0.0002 (0.0011)  
loss\_rpn\_box\_reg: 0.0033 (0.0029) time: 0.5792 data: 0.0088 max mem: 3780

IoU metric: bbox

Average Precision (AP) @[ IoU=0.50:0.95 | area= all | maxDets=100 ] = 0.806

Average Precision (AP) @[ IoU=0.50 | area= all | maxDets=100 ] = 0.975

Average Precision (AP) @[ IoU=0.75 | area= all | maxDets=100 ] = 0.919

Average Precision (AP) @[ IoU=0.50:0.95 | area= small | maxDets=100 ] = 0.348

Average Precision (AP) @[ IoU=0.50:0.95 | area=medium | maxDets=100 ] = 0.700

Average Precision (AP) @[ IoU=0.50:0.95 | area= large | maxDets=100 ] = 0.830

Average Recall (AR) @[ IoU=0.50:0.95 | area= all | maxDets= 1 ] = 0.354


Average Recall (AR) @[ IoU=0.50:0.95 | area= all | maxDets= 10 ] = 0.853

Average Recall (AR) @[ IoU=0.50:0.95 | area= all | maxDets=100 ] = 0.853

Average Recall (AR) @[ IoU=0.50:0.95 | area= small | maxDets=100 ] = 0.467

Average Recall (AR) @[ IoU=0.50:0.95 | area=medium | maxDets=100 ] = 0.775

Average Recall (AR) @[ IoU=0.50:0.95 | area= large | maxDets=100 ] = 0.872

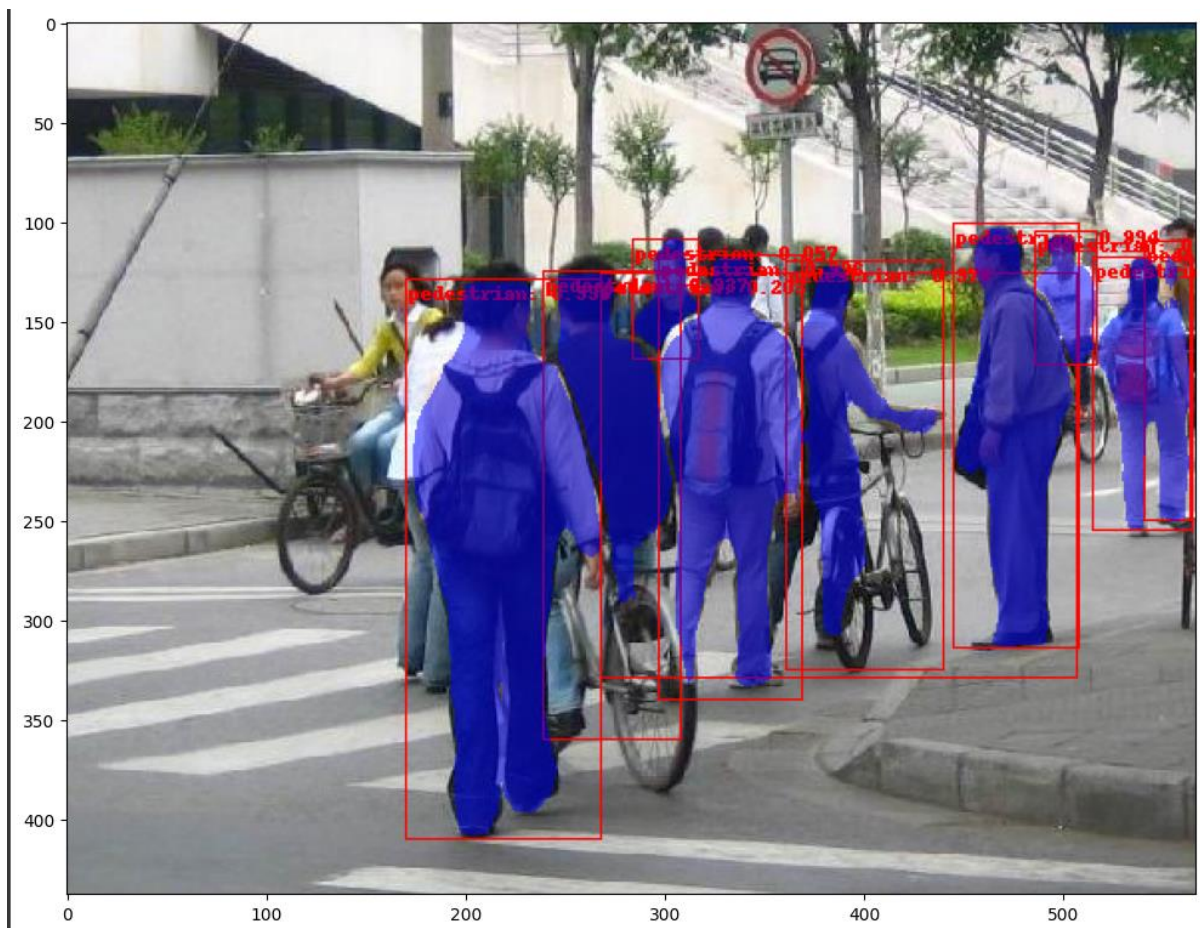

pred\_labels

```
[
  'pedestrian: 0.996',
  'pedestrian: 0.996',
  'pedestrian: 0.994',
  'pedestrian: 0.987',
  'pedestrian: 0.976',
  'pedestrian: 0.937',
  'pedestrian: 0.203',
  'pedestrian: 0.181',
  'pedestrian: 0.119',
  'pedestrian: 0.057'
]
```

[14] pred\_boxes


```
tensor([
  [170, 129, 268, 410],
  [297, 117, 369, 340],
  [445, 101, 508, 314],
  [515, 118, 565, 255],
  [361, 120, 440, 325],
  [239, 125, 308, 360],
  [268, 126, 507, 329],
  [486, 105, 517, 172],
  [541, 110, 564, 250],
  [284, 109, 317, 169]], device='cuda:0')
```

### Problem 5: Part C

Code will be below in an attached pdf to this document

There are 5 people in the photograph, 4 are in the center and easy to spot but there's a fifth on the right side a bit in the back, the finetuning model picked up on that and with low confidence but the backbone model only recognized 4 people, being the 4 Beatles members in the middle of the photograph. The finetuning model also picked up some errors, it had bounding boxes around multiple Beatles members as possible objects but gave it a really low confidence score. So the finetuning model performed better here as it caught the 4 members with high confidence, a person in the back with fairly low confidence and had 4 other bounding boxes with multiple people in them but gave those boxes a really low confidence score, I would calculate those as False Positives. The backbone model performed worst not only because it missed a person entirely but because the confidence it had about the 4 Beatles members in the center of the image was low, it gave George Harrison a confidence score of less than .5 but the rest as above .9. All that being said is it important to point out that the finetuning model does have a higher error rate. Again, I'm not saying which is better but I still like the finetuning model a bit more, it might have more errors but it is more confident about detecting objects and can pick up on hard to see objects.

## Finetuning Model

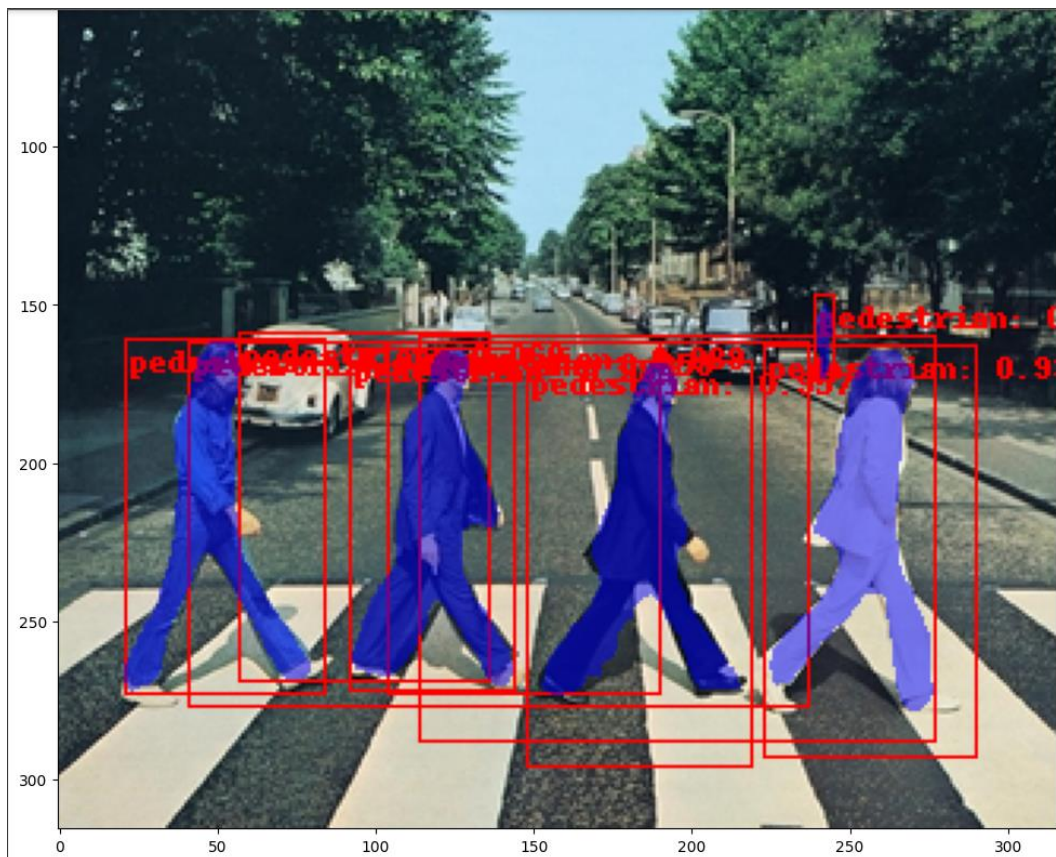

```
[10] pred_labels
```


```
['pedestrian: 0.987',  
 'pedestrian: 0.985',  
 'pedestrian: 0.957',  
 'pedestrian: 0.939',  
 'pedestrian: 0.103',  
 'pedestrian: 0.093',  
 'pedestrian: 0.089',  
 'pedestrian: 0.060',  
 'pedestrian: 0.059']
```


```
[11] pred_boxes
```


```
⇒ tensor([[ 21, 161,  84, 273],  
          [ 92, 164, 144, 272],  
          [148, 168, 219, 296],  
          [223, 163, 290, 293],  
          [ 41, 162, 237, 277],  
          [239, 147, 245, 174],  
          [114, 160, 277, 288],  
          [ 57, 159, 136, 269],  
          [104, 162, 190, 273]], device='cuda:0')
```



## Backbone Model

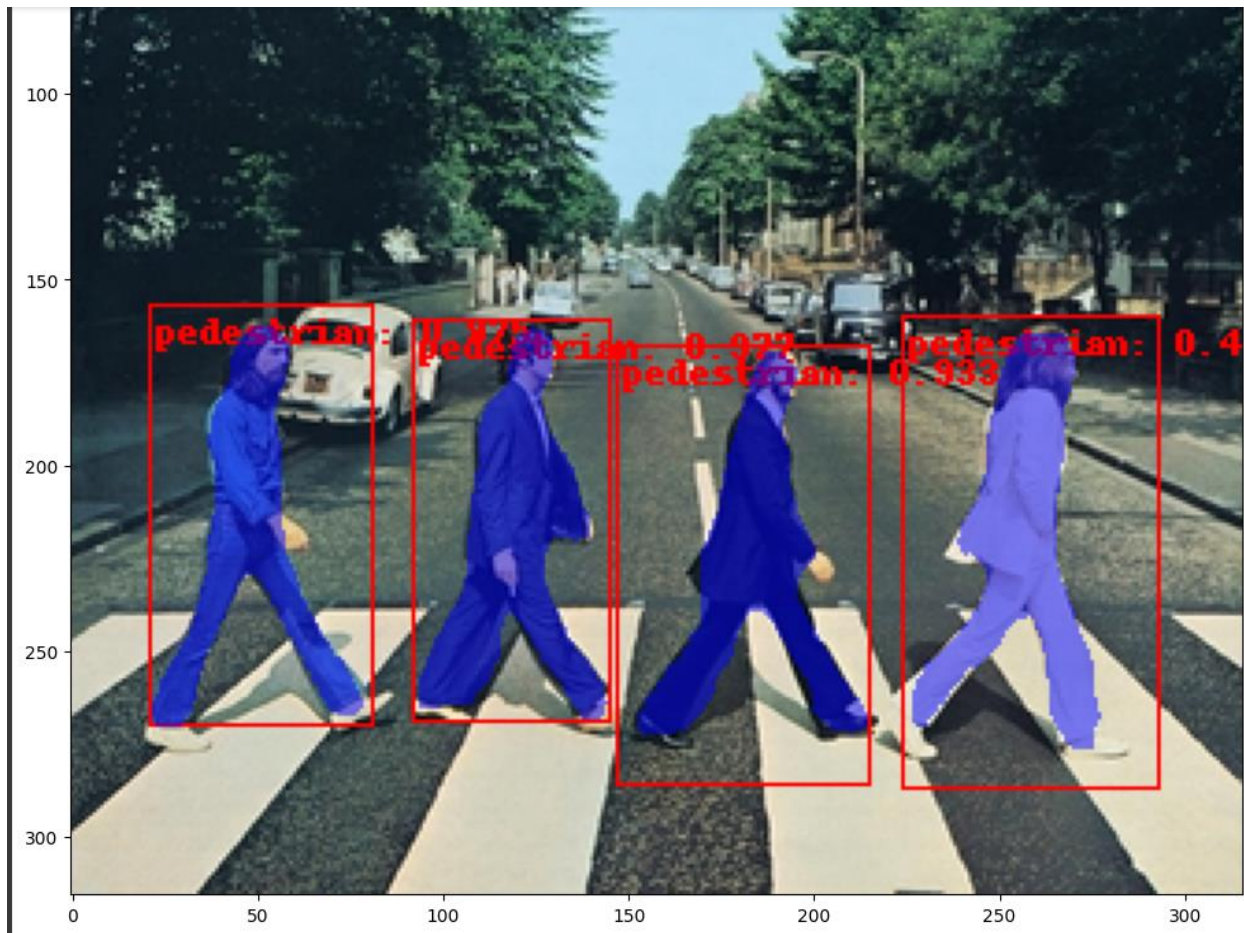

 `pred_labels`

 `['pedestrian: 0.977',  
'pedestrian: 0.975',  
'pedestrian: 0.933',  
'pedestrian: 0.496']`

`[11] pred_boxes`

```
tensor([[ 92, 161, 145, 269],  
        [ 21, 157,  81, 270],  
        [147, 168, 215, 286],  
        [224, 160, 293, 287]], device='cuda:0')
```