Evidence availability: coverage and read cost

All 64 controlled profiles, each repeated in three application domains

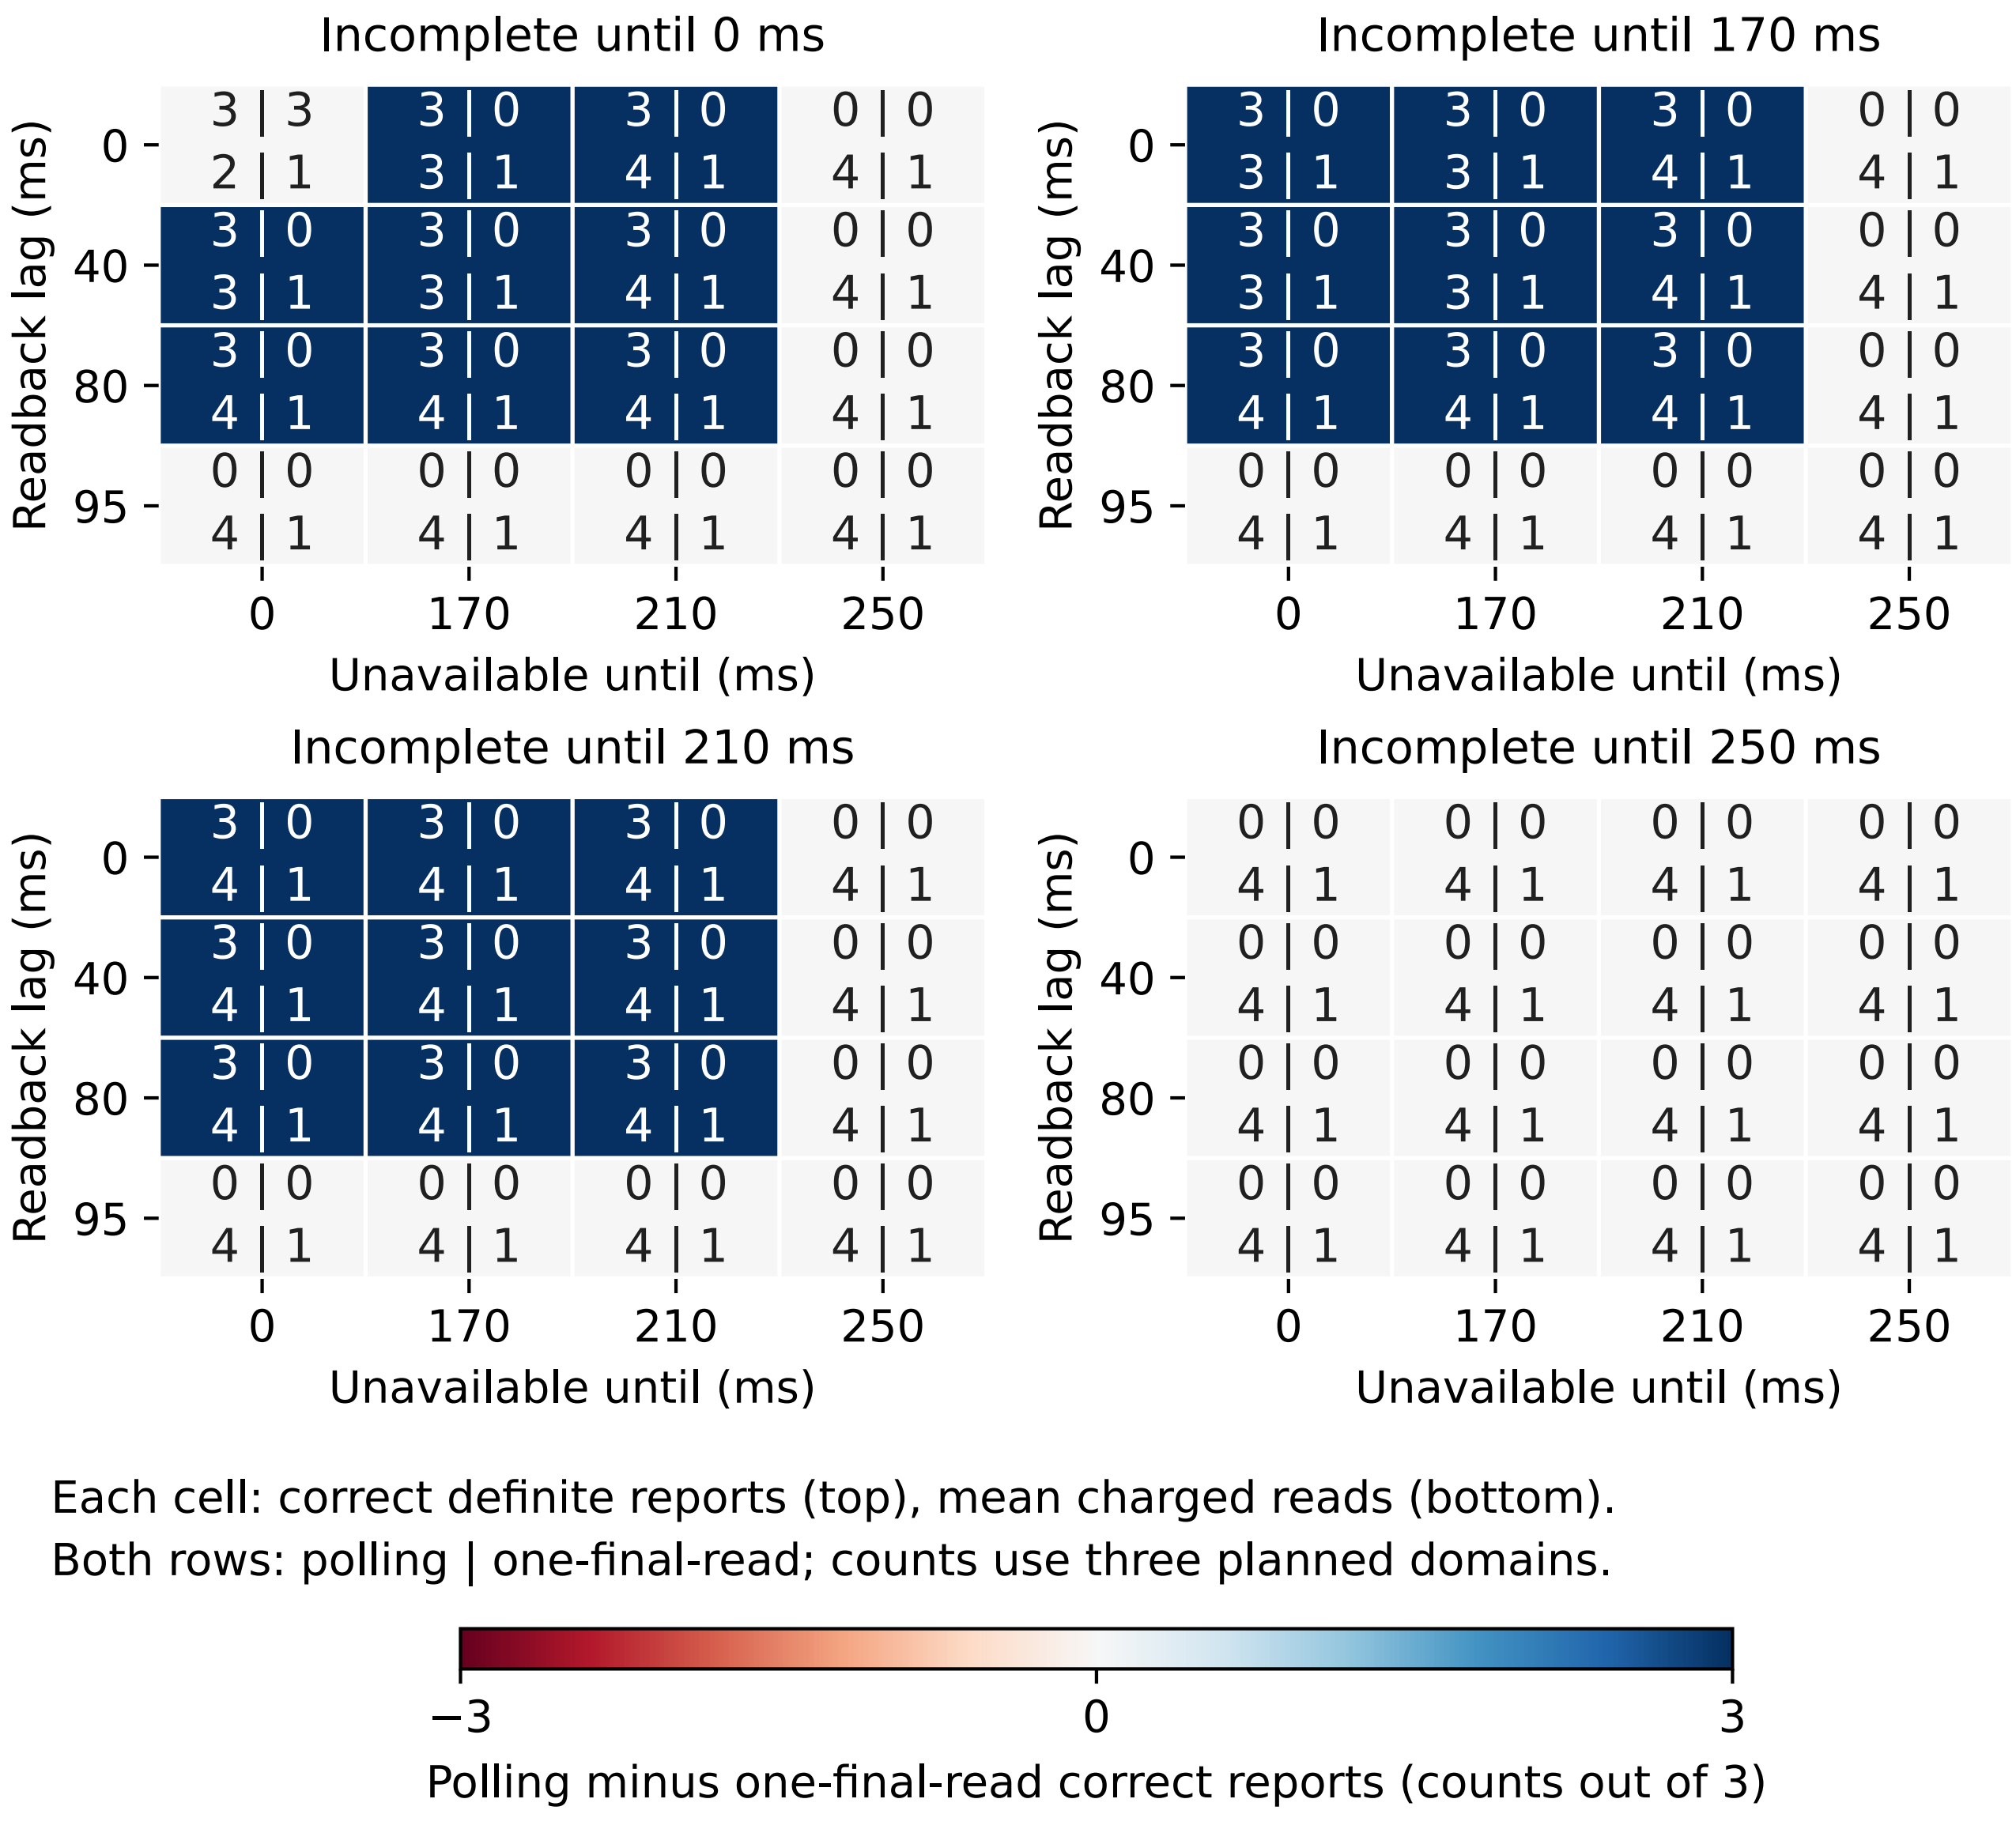

Incomplete until 0 ms

Readback lag (ms)	0	170	210	250
0	3 | 3 2 | 1	3 | 0 3 | 1	3 | 0 4 | 1	0 | 0 4 | 1
40	3 | 0 3 | 1	3 | 0 3 | 1	3 | 0 4 | 1	0 | 0 4 | 1
80	3 | 0 4 | 1	3 | 0 4 | 1	3 | 0 4 | 1	0 | 0 4 | 1
95	0 | 0 4 | 1	0 | 0 4 | 1	0 | 0 4 | 1	0 | 0 4 | 1

Incomplete until 170 ms

Readback lag (ms)	0	170	210	250
0	3 | 0 3 | 1	3 | 0 3 | 1	3 | 0 4 | 1	0 | 0 4 | 1
40	3 | 0 3 | 1	3 | 0 3 | 1	3 | 0 4 | 1	0 | 0 4 | 1
80	3 | 0 4 | 1	3 | 0 4 | 1	3 | 0 4 | 1	0 | 0 4 | 1
95	0 | 0 4 | 1	0 | 0 4 | 1	0 | 0 4 | 1	0 | 0 4 | 1

Incomplete until 210 ms

Readback lag (ms)	0	170	210	250
0	3 | 0 4 | 1	3 | 0 4 | 1	3 | 0 4 | 1	0 | 0 4 | 1
40	3 | 0 4 | 1	3 | 0 4 | 1	3 | 0 4 | 1	0 | 0 4 | 1
80	3 | 0 4 | 1	3 | 0 4 | 1	3 | 0 4 | 1	0 | 0 4 | 1
95	0 | 0 4 | 1	0 | 0 4 | 1	0 | 0 4 | 1	0 | 0 4 | 1

Incomplete until 250 ms

Readback lag (ms)	0	170	210	250
0	0 | 0 4 | 1	0 | 0 4 | 1	0 | 0 4 | 1	0 | 0 4 | 1
40	0 | 0 4 | 1	0 | 0 4 | 1	0 | 0 4 | 1	0 | 0 4 | 1
80	0 | 0 4 | 1	0 | 0 4 | 1	0 | 0 4 | 1	0 | 0 4 | 1
95	0 | 0 4 | 1	0 | 0 4 | 1	0 | 0 4 | 1	0 | 0 4 | 1

Each cell: correct definite reports (top), mean charged reads (bottom).
Both rows: polling | one-final-read; counts use three planned domains.

Domains repeat one mechanism; they are not independent task samples.
Reads use observed slots; u marks unavailable outcomes.
All five policies and exact endpoint counts remain in the tables.