Finite-suite recovery and global-state reports

24 authored cases x 128 seeds per method; no within-case recorded-metric variation

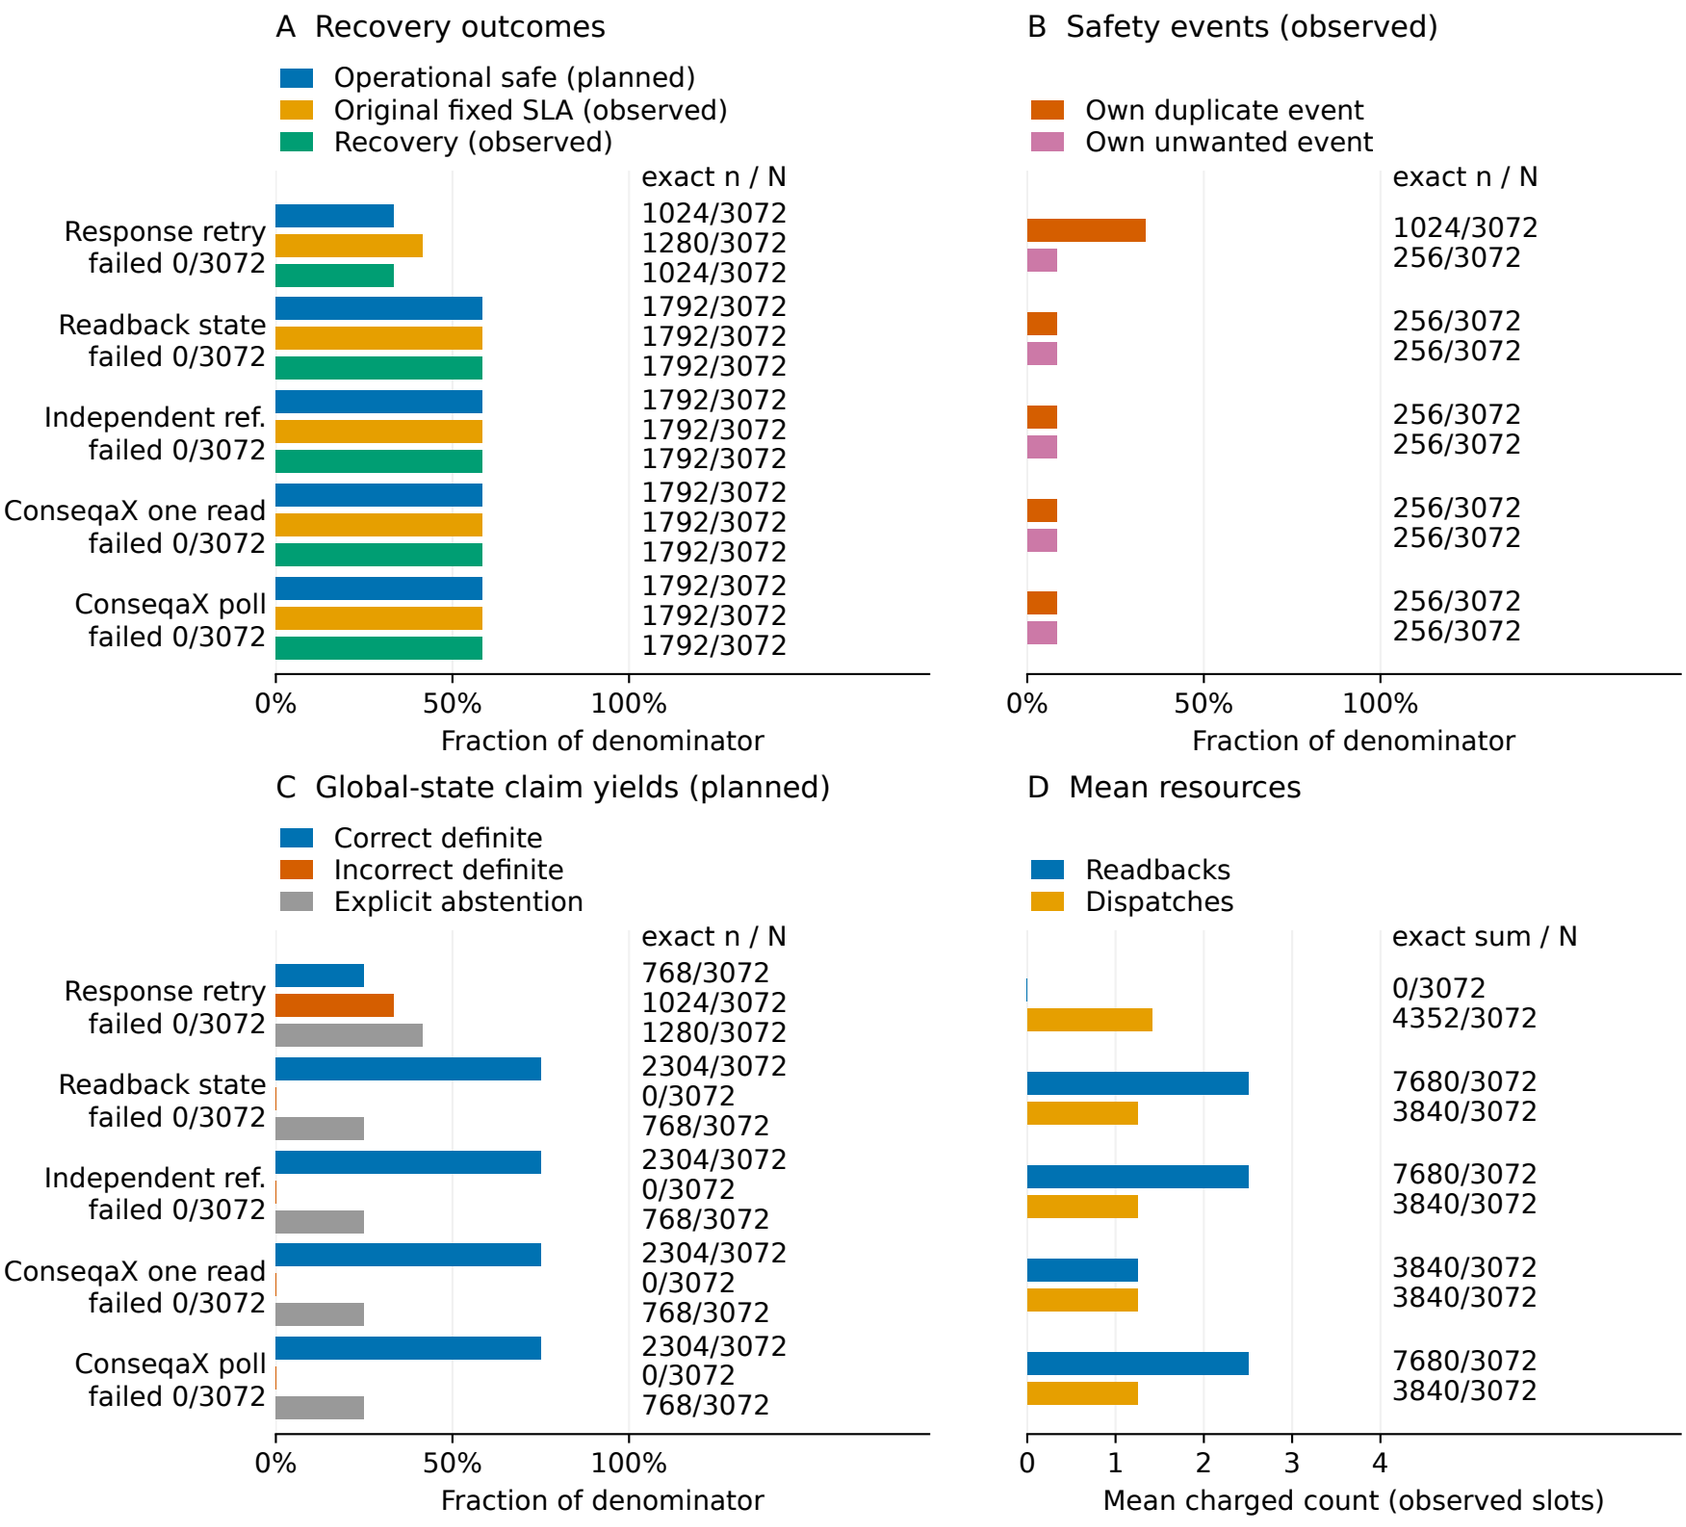

N is the displayed denominator; [U=n] marks unavailable semantic/resource slots (omitted when zero).

Operational safe uses every planned slot; failed execution counts as false. Original SLA stays fixed.

Claim yields use planned slots: correct + incorrect + abstention + unavailable = all planned.

Global-state false-success counts / observed: retry 768/3072; state 0/3072; reference 0/3072;
one read 0/3072; poll 0/3072. False success is a subset of incorrect definite claims.

Resources are charged counts. Logical decision time is exported separately; it is not wall latency.