CSS Positioning Properties

Property	Description	Possible Values	Default Value	Syntax / Example
position	Defines how an element is positioned in the document.	static, relative, absolute, fixed, sticky	**static**	position: absolute;
top	Distance between element and top edge of container.	Any CSS length (px, %, auto)	**auto**	top: 20px;
right	Distance between element and right edge of container.	Any CSS length (px, %, auto)	**auto**	right: 10px;
bottom	Distance between element and bottom edge of container.	Any CSS length (px, %, auto)	**auto**	bottom: 15px;
left	Distance between element and left edge of container.	Any CSS length (px, %, auto)	**auto**	left: 30px;
z-index	Controls stack order of overlapping elements.	Integer (auto, positive or negative values)	**auto**	z-index: 2; (Higher = on top)


- ✓ **static: Default, element follows normal document flow.**
- ✓ **relative: Moved relative to its normal position.**
- ✓ **absolute: Positioned relative to the nearest positioned ancestor.**
- ✓ **fixed: Stays fixed in place even when scrolling.**
- ✓ **z-index: Controls which element appears on top of others.**

Example to understand position

```
<html>
<head>
  <style>
.container{
  margin-top: 50px;
  height: 800px;
  border: 1px solid red;
  position: relative;
}
.container1{
  margin-top: 30px;
  height: 1000px;
  border: 2px solid black;
}
```

```
.test {
    margin-left: 20px;
    height: 100px;
    width : 100px;
    text-align: center;
    font-size:30px;
}
#test1{
    background-color: aqua;
}
#test2{
    background-color: rgb(76, 0, 255);
    position: relative;
    top: 50px;
    left:40px;
    z-index: 1;
}
#test3{
    background-color: rgb(255, 0, 140);
    position: absolute;
    top: 100px;
    right: 0px;
}
#test4{
    background-color: rgb(208, 255, 0);
    position: fixed;
    top: 50px;
    right: 0;
}
#test5{
    background-color: rgb(255, 0, 0);
    position: sticky;
    top: 0px;
}
    </style>
</head>
<body>
    <div class="container">
        <div class="test" id="test1">1</div>
        <div class="test" id="test2">2</div>
```

```
    <div class="test" id="test3">3</div>
    <div class="test" id="test4">4</div>
    <div class="test" id="test5">5</div>
  </div>
  <div class="container1"></div>
</body>
</html>
```

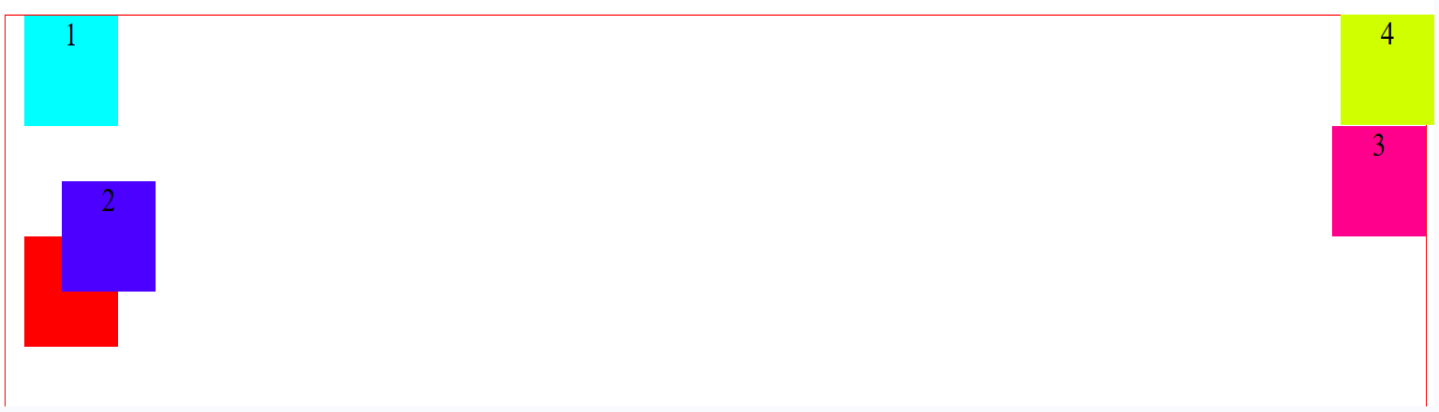

Selector	Position Type	Behavior / Explanation
#test1	static (default)	No positioning applied follows normal document flow.
#test2	relative	Moved **50px down** and **40px right** *from its normal position*. The original space is still reserved.
#test3	absolute	Placed **100px from top** and **0px from right** of the **nearest positioned ancestor** (.container has position: relative, so that's the reference).
#test4	fixed	Positioned **50px from top and right of the viewport**, stays **fixed even when scrolling**.
#test5	sticky	Acts like a normal element until the page is scrolled then it **sticks to the top (0px)** of its container.