INTERNET PROGRAMMING

LAB EXPERIMENTS

CSA4301

SLOT-D

UNIT-1

LAB PROGRAMS (1-6)

Name: D Dhanuja

Reg.No: 192311427

Experiment 1: Library Management System

Aim

To design a simple library management webpage that allows users to search books and view their availability.

HTML Code


```
<!DOCTYPE html>
<html>
<head>
<title>Library Management</title>
<style>
body{font-family:Arial;background:#eef3f8;margin:0;color:#203047}
header{background:#173b5e;color:white;padding:22px;text-align:center}
main{max-width:850px;margin:30px
auto;background:white;padding:24px;border-radius:12px}
input,button{padding:11px;margin:6px 3px;border:1px solid #bbc7d4;border-
radius:6px}
button{background:#176b83;color:white;cursor:pointer}
table{width:100%;border-collapse:collapse;margin-top:18px}
th,td{padding:12px;border:1px solid #ccd5df;text-align:left}
th{background:#dcebf3}
#msg{color:#176b58;font-weight:bold}
</style>
</head>
<body>
<header><h1>📚 Library Management System</h1><p>Search and view
books</p></header>
<main>
<h2>Book Catalog</h2>
<input id="search" placeholder="Search by title or author">
<button onclick="searchBooks()">Search</button>
<table>
<thead><tr><th>Book</th><th>Author</th><th>Status</th></tr></thead>
```

```
<tbody id="books"></tbody>
</table>
<h2>Student Login (Demo)</h2>
<input id="email" type="email" placeholder="Student email">
<input id="password" type="password" placeholder="Password">
<button onclick="login()">Login</button>
<p id="msg"></p>
</main>
<script>
const data=[
 {title:"Web Technology",author:"R. Kumar",status:"Available"},
 {title:"Java Programming",author:"S. Devi",status:"Issued"},
 {title:"Database Systems",author:"A. Raj",status:"Available"},
 {title:"Computer Networks",author:"M. John",status:"Available"}
];
function show(list){
 document.getElementById("books").innerHTML=list.map(b=>
 `<tr><td>${b.title}</td><td>${b.author}</td><td>${b.status}</td></tr>`
 ).join("");
}
function searchBooks(){
 const q=document.getElementById("search").value.toLowerCase();
 show(data.filter(b=>(b.title+" "+b.author).toLowerCase().includes(q)));
}
function login(){
 const e=document.getElementById("email").value;
 const p=document.getElementById("password").value;
 document.getElementById("msg").textContent=e&&p?
 "Demo login form submitted. Backend authentication is not connected.":
 "Enter email and password.";
}
show(data);
</script>
```

</body>
</html>

Output

A library webpage appears with a searchable book table, availability status, and a demo login form.

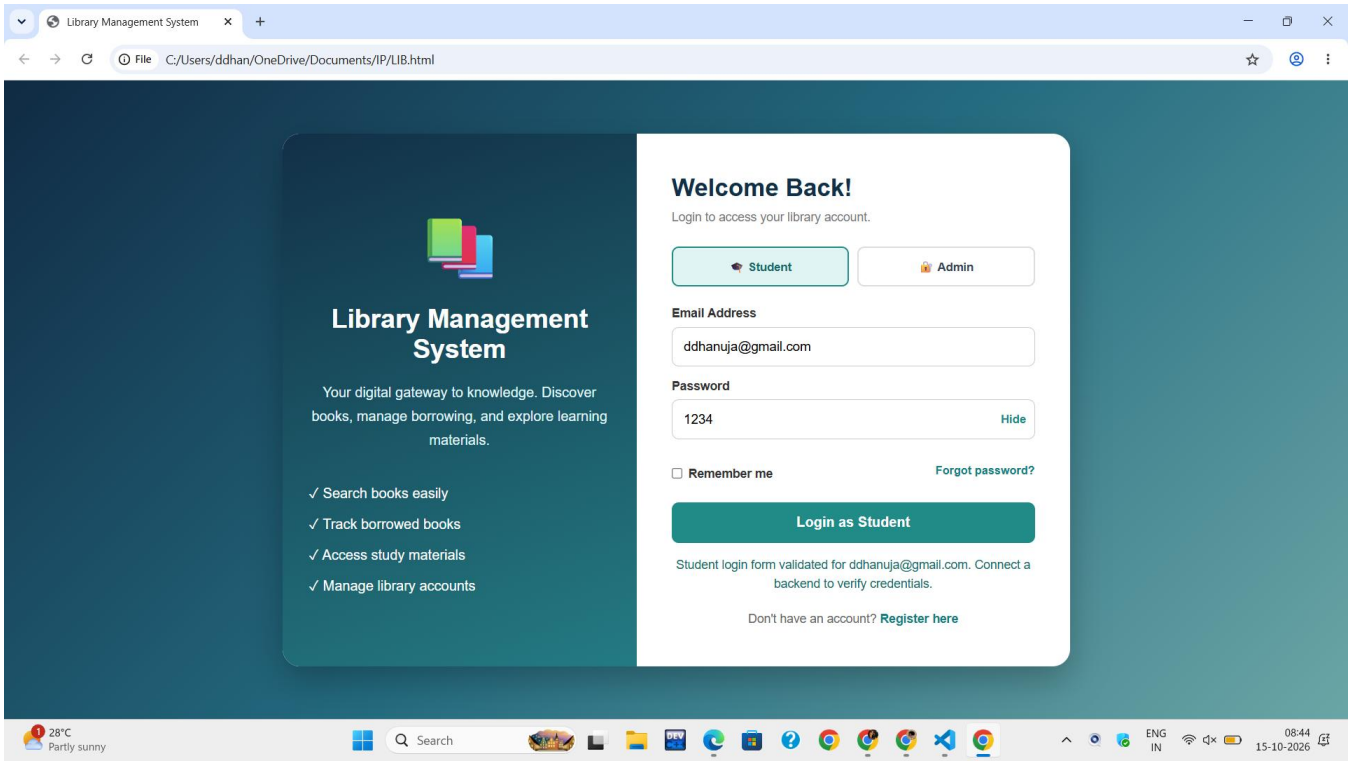

Result

Thus, a library management webpage with book search and a demo login form was created successfully.

Experiment 2: Hotel Room Booking System

Aim

To create a hotel booking webpage that displays room types, prices, and accepts a demo booking request.


HTML Code

```
<!DOCTYPE html>
<html>
<head>
<title>Hotel Booking</title>
<style>
body{font-family:Arial;background:#fff7ee;margin:0;color:#49352a}
header{background:#68452f;color:white;text-align:center;padding:24px}
main{max-width:800px;margin:30px
auto;padding:22px;background:white;border-radius:12px}
.room{border:1px solid #e1cbb8;padding:15px;margin:12px 0;border-
radius:8px}
input,select,button{padding:11px;margin:7px 0;width:100%;box-
sizing:border-box}
button{background:#95613e;color:white;border:0;border-
radius:6px;cursor:pointer}
#result{color:#176b4d;font-weight:bold}
</style>
</head>
<body>
<header><h1>🏨 Grand Stay Hotel</h1><p>Find your comfortable
stay</p></header>
<main>
<h2>Available Room Types</h2>
<div class="room"><h3>Standard Room</h3><p>Wi-Fi • One double bed •
₹1800/night</p></div>
<div class="room"><h3>Deluxe Room</h3><p>Wi-Fi • City view •
₹2800/night</p></div>
```

```
<div class="room"><h3>Family Suite</h3><p>Two beds • Living area • ₹4200/night</p></div>
<h2>Book a Room</h2>
<form id="booking">
<label>Guest Name</label><input id="name" required placeholder="Full name">
<label>Check-in Date</label><input id="date" type="date" required>
<label>Number of Guests</label><input id="guests" type="number" min="1" max="8" value="1" required>
<label>Room Type</label>
<select id="room">
<option value="1800">Standard - ₹1800/night</option>
<option value="2800">Deluxe - ₹2800/night</option>
<option value="4200">Family Suite - ₹4200/night</option>
</select>
<label>Nights</label><input id="nights" type="number" min="1" max="30" value="1" required>
<button>Calculate Demo Booking</button>
</form>
<p id="result"></p>
<script>
document.getElementById("booking").onsubmit=function(e){
 e.preventDefault();
 const total=Number(room.value)*Number(nights.value);
 result.textContent="Demo booking request received for "+name.value+
 ". Estimated total: ₹"+total+". No room has been actually reserved.";
};
</script>
</main>
</body>
</html>
```

Output

A hotel page displays three room types and a booking form. Submitting the form displays an estimated room cost.

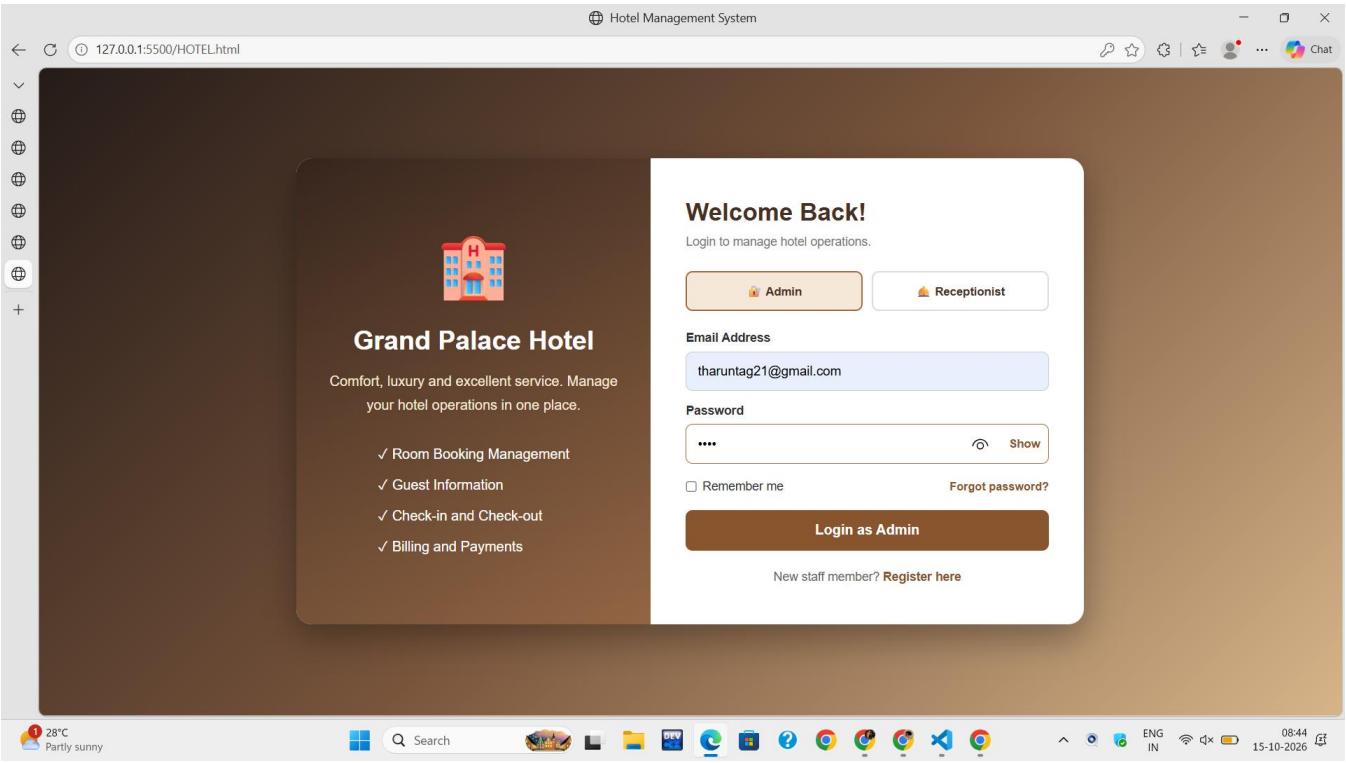

Result

Thus, a hotel room booking webpage with room selection and cost calculation was created successfully.

Experiment 3: Online Bus Ticket Booking System

Aim

To design a bus ticket booking webpage with route selection, passenger count, and fare calculation.


HTML Code

```
<!DOCTYPE html>
<html>
<head>
<title>Bus Ticket Booking</title>
<style>
body{font-family:Arial;background:#eef6f6;margin:0;color:#203b43}
header{background:#176b70;color:white;text-align:center;padding:24px}
main{max-width:700px;margin:30px
auto;background:white;padding:25px;border-radius:12px}
label{display:block;margin-top:12px}
input,select,button{padding:11px;width:100%;margin-top:6px;box-
sizing:border-box}
button{background:#176b70;color:white;border:0;border-
radius:6px;cursor:pointer}
#result{background:#e3f7ee;padding:15px;margin-top:18px}
</style>
</head>
<body>
<header><h1>🚌 GoBus Ticket Booking</h1><p>Plan your next
journey</p></header>
<main>
<h2>Search and Book a Bus</h2>
<form id="busForm">
<label>From</label><select
id="from"><option>Chennai</option><option>Madurai</option><option>C
oimbatore</option></select>
<label>To</label><select
```

```
id="to"><option>Bengaluru</option><option>Chennai</option><option>Madurai</option></select>
<label>Journey Date</label><input id="date" type="date" required>
<label>Bus Type</label><select id="type"><option>AC Sleeper</option><option>Non-AC Seater</option><option>AC Seater</option></select>
<label>Passengers</label><input id="count" type="number" min="1" max="6" value="1" required>
<button>Calculate Fare</button>
</form>
<div id="result">Enter journey details to calculate the demo fare.</div>
<script>
document.getElementById("busForm").onsubmit=function(e){
 e.preventDefault();
 if(from.value===to.value){result.textContent="Choose different cities.";return;}
 const rate=type.value==="AC Sleeper"?850:type.value==="AC Seater"?650:450;
 const total=rate*Number(count.value);
 result.textContent="Route: "+from.value+" to "+to.value+
 " | Date: "+date.value+" | "+type.value+" | Total demo fare: ₹"+total+
 ". This is not a real ticket.";
};
</script>
</main>
</body>
</html>
```

Output

The bus booking page accepts route, date, bus type, and passenger count, then displays a sample fare.

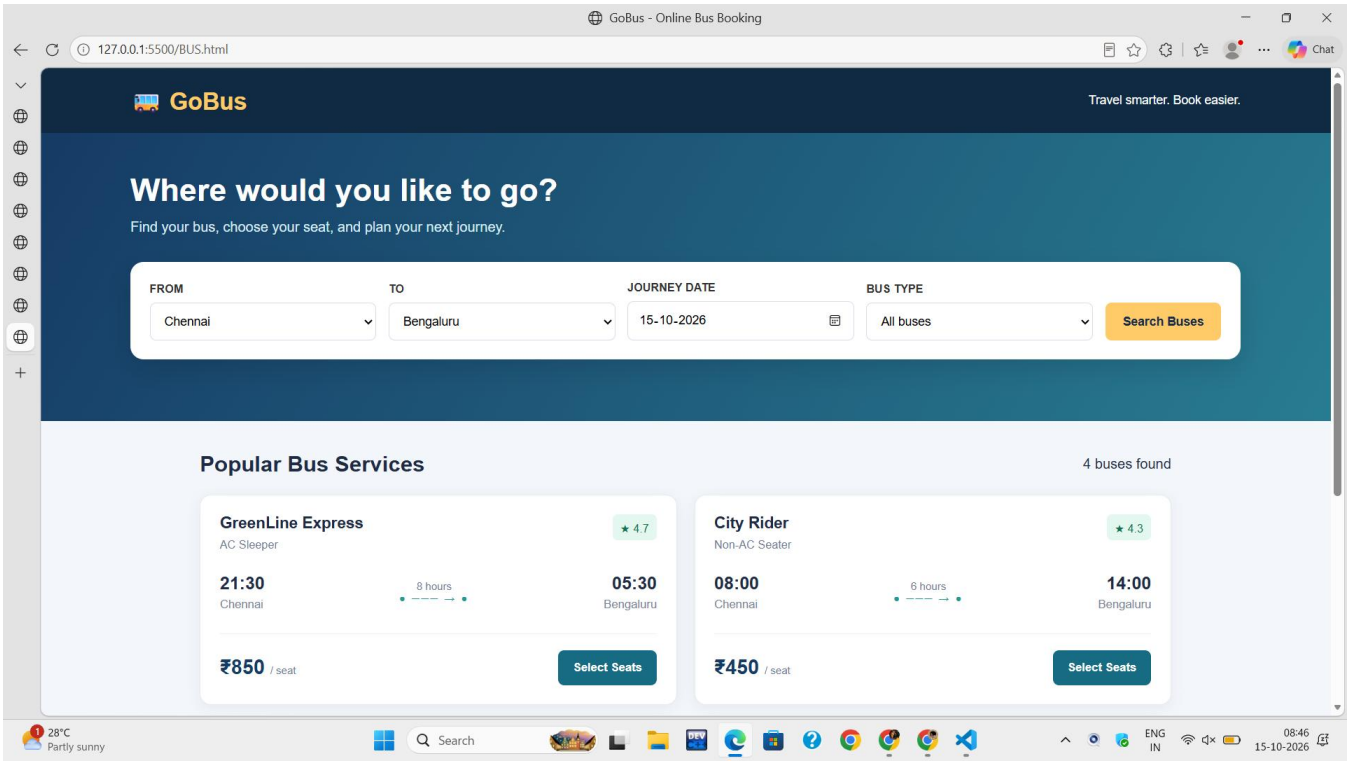

Result

Thus, an online bus booking webpage with journey details and fare calculation was created successfully.

Experiment 4: Online Train Reservation System

Aim

To create a train reservation webpage that accepts journey details and calculates a sample ticket fare.


HTML Code

```
<!DOCTYPE html>
<html>
<head>
<title>Train Reservation</title>
<style>
body{font-family:Arial;background:#f0f4fa;margin:0;color:#243650}
header{background:#203f68;color:white;text-align:center;padding:24px}
main{max-width:720px;margin:30px
auto;background:white;padding:25px;border-radius:12px}
label{display:block;margin-top:12px}
input,select,button{padding:11px;width:100%;margin-top:6px;box-
sizing:border-box}
button{background:#267b83;color:white;border:0;border-
radius:6px;cursor:pointer}
#ticket{margin-top:20px;padding:15px;background:#e7f8ef}
</style>
</head>
<body>
<header><h1>🚆 RailConnect</h1><p>Online Train Reservation
Demo</p></header>
<main>
<h2>Journey Details</h2>
<form id="trainForm">
<label>Origin Station</label><select
id="origin"><option>Chennai</option><option>Bengaluru</option><option
>Madurai</option></select>
<label>Destination Station</label><select
```

```
id="destination"><option>Bengaluru</option><option>Chennai</option><op
tion>Coimbatore</option></select>
<label>Journey Date</label><input id="date" type="date" required>
<label>Passenger Name</label><input id="name" required>
<label>Travel Class</label><select id="classType"><option
value="500">Sleeper - ₹500</option><option value="1000">AC 3 Tier -
₹1000</option><option value="1600">AC 2 Tier - ₹1600</option></select>
<label>Passengers</label><input id="count" type="number" min="1"
max="6" value="1" required>
<button>Generate Demo Ticket</button>
</form>
<div id="ticket">Your demo ticket will appear here.</div>
<script>
document.getElementById("trainForm").onsubmit=function(e){
 e.preventDefault();
 if(origin.value===destination.value){ticket.textContent="Select different
stations.";return;}
 const pnr="DEMO"+Math.floor(100000+Math.random()*900000);
 ticket.textContent="Demo PNR: "+pnr+" | Passenger: "+name.value+
 " | "+origin.value+" to "+destination.value+" | "+date.value+
 " | Estimated fare: ₹"+(Number(classType.value)*Number(count.value))+
 ". This is not an official railway ticket.";
};
</script>
</main>
</body>
</html>
```

Output

The train reservation form accepts origin, destination, date, passenger name, class, and passenger count. It displays a sample PNR and fare.

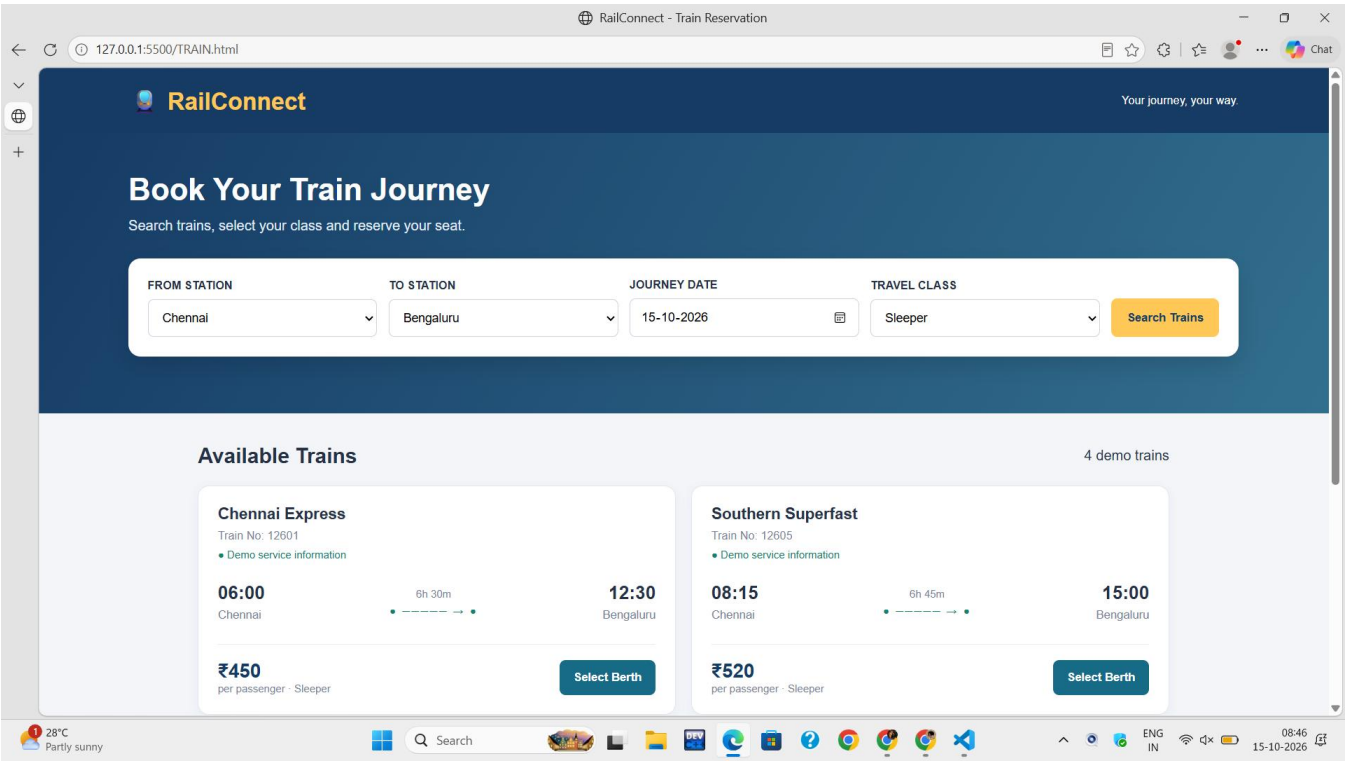

Result

Thus, a train reservation webpage with passenger details and sample ticket generation was created successfully.

Experiment 5: Online Flight Reservation System

Aim

To develop a flight reservation webpage that searches sample flights and calculates fares based on cabin class and passenger count.


HTML Code

```
<!DOCTYPE html>
<html>
<head>
<title>Flight Reservation</title>
<style>
body{font-family:Arial;background:#f1f6fb;margin:0;color:#20344f}
header{background:#142b49;color:white;text-align:center;padding:24px}
main{max-width:760px;margin:30px
auto;background:white;padding:25px;border-radius:12px}
label{display:block;margin-top:12px}
input,select,button{padding:11px;width:100%;margin-top:6px;box-
sizing:border-box}
button{background:#168c91;color:white;border:0;border-
radius:6px;cursor:pointer}
#result{padding:16px;margin-top:20px;background:#e3f7f4;line-height:1.8}
</style>
</head>
<body>
<header><h1>✈ SkyNova Flight Booking</h1><p>Find your next
flight</p></header>
<main>
<h2>Search Flights</h2>
<form id="flightForm">
<label>From</label><select
id="from"><option>Chennai</option><option>Mumbai</option><option>D
elhi</option></select>
<label>To</label><select
```

```
id="to"><option>Mumbai</option><option>Chennai</option><option>Delhi
</option></select>
<label>Departure Date</label><input id="date" type="date" required>
<label>Cabin Class</label><select id="cabin"><option
value="1">Economy</option><option value="1.5">Premium
Economy</option><option value="3">Business</option></select>
<label>Passengers</label><input id="count" type="number" min="1"
max="6" value="1" required>
<button>Search Flights</button>
</form>
<div id="result">Search to view sample flight details.</div>
<script>
document.getElementById("flightForm").onsubmit=function(e){
 e.preventDefault();
 if(from.value===to.value){result.textContent="Choose different
cities.";return;}
 const fare=Math.round(4200*Number(cabin.value)*Number(count.value));
 result.textContent="Sample flight: SkyNova SN204 | "+from.value+" to
"+to.value+
 " | Date: "+date.value+" | Passengers: "+count.value+
 " | Estimated total: ₹"+fare+
 ". Demo only; no real flight is booked.";
};
</script>
</main>
</body>
</html>
```

Output

The flight reservation page collects route, date, cabin class, and passenger count, then shows sample flight information and estimated fare.

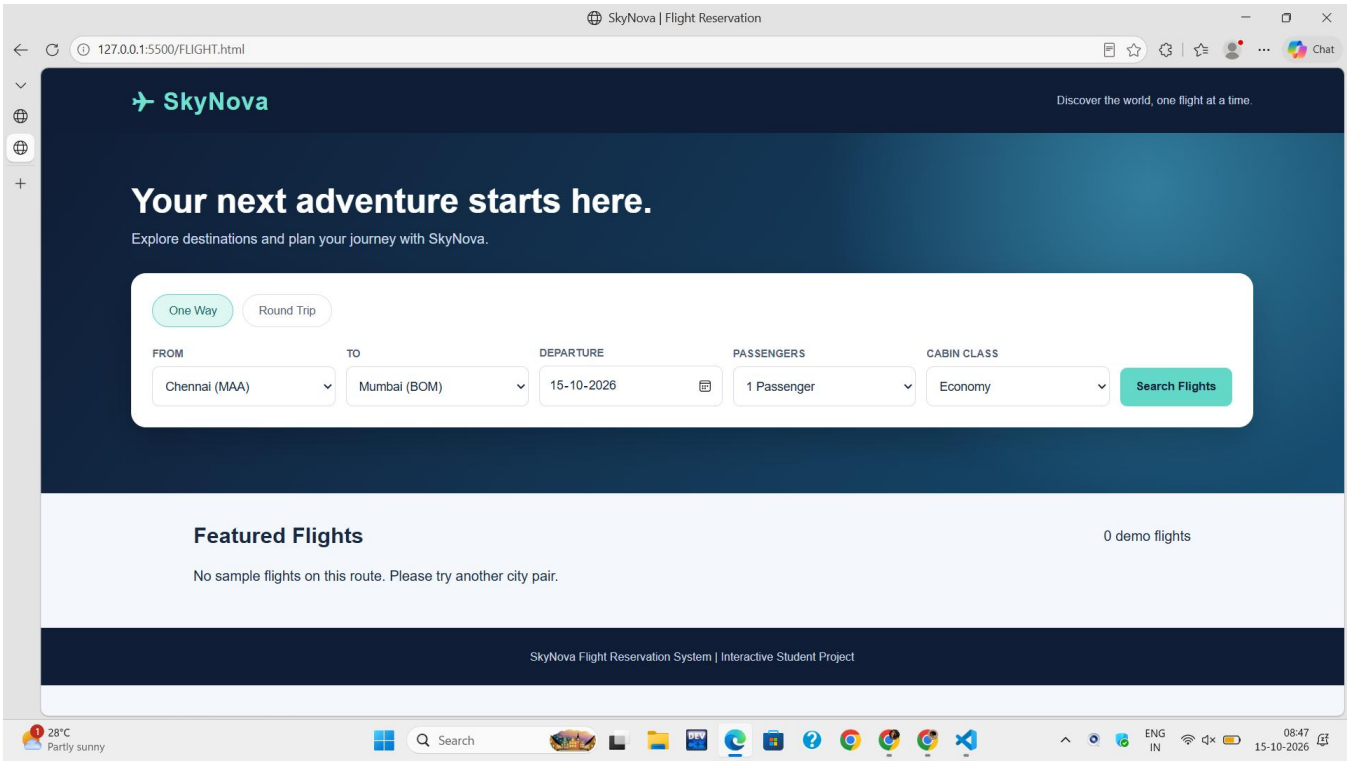

Result

Thus, a flight reservation webpage with flight search and class-based fare calculation was created successfully.

Experiment 6: Online Cake Ordering System

Aim

To develop an online cake ordering webpage where users can browse cakes, choose quantities, enter delivery details, and calculate the total.


HTML Code

```
<!DOCTYPE html>
<html>
<head>
<title>Sweet Crumbs Cake Shop</title>
<style>
body{font-family:Arial;background:#fff6f7;margin:0;color:#573943}
header{background:#a84667;color:white;text-align:center;padding:24px}
main{max-width:800px;margin:30px
auto;background:white;padding:25px;border-radius:12px}
.cake{padding:13px;margin:10px 0;background:#fff0f3;border-radius:8px}
label{display:block;margin-top:12px}
input,select,button{padding:11px;width:100%;margin-top:6px;box-
sizing:border-box}
button{background:#a84667;color:white;border:0;border-
radius:6px;cursor:pointer}
#result{margin-top:20px;background:#e8f8ee;padding:15px;line-height:1.8}
</style>
</head>
<body>
<header><h1>🍰 Sweet Crumbs</h1><p>Online Cake
Ordering</p></header>
<main>
<h2>Choose Your Cake</h2>
<div class="cake">🍫 Chocolate Cake — ₹650</div>
<div class="cake">🍓 Strawberry Cake — ₹750</div>
<div class="cake">🍰 Vanilla Cake — ₹500</div>
```

```
<form id="cakeForm">
<label>Cake Type</label>
<select id="cake"><option value="650">Chocolate - ₹650</option><option
value="750">Strawberry - ₹750</option><option value="500">Vanilla -
₹500</option></select>
<label>Quantity</label><input id="quantity" type="number" min="1"
max="20" value="1" required>
<label>Customer Name</label><input id="name" required
placeholder="Your name">
<label>Delivery Address</label><textarea id="address" required
placeholder="Enter address"></textarea>
<label>Delivery Date</label><input id="date" type="date" required>
<label>Cake Message</label><input id="message" maxlength="40"
placeholder="Happy Birthday!">
<button>Place Demo Order</button>
</form>
<div id="result">Your order summary will appear here.</div>
<script>
document.getElementById("cakeForm").onsubmit=function(e){
 e.preventDefault();
 const total=Number(cake.value)*Number(quantity.value);
 result.textContent="Demo order for "+name.value+" | "+quantity.value+
 " cake(s) | Delivery: "+date.value+" | Message: "+
 (message.value||"None")+" | Total: ₹"+total+
 ". No real payment or delivery has been arranged.";
};
</script>
</main>
</body>
</html>
```

Output

The cake ordering webpage displays cake choices and accepts quantity, customer name, delivery address, date, and message. It calculates and displays the demo order total.

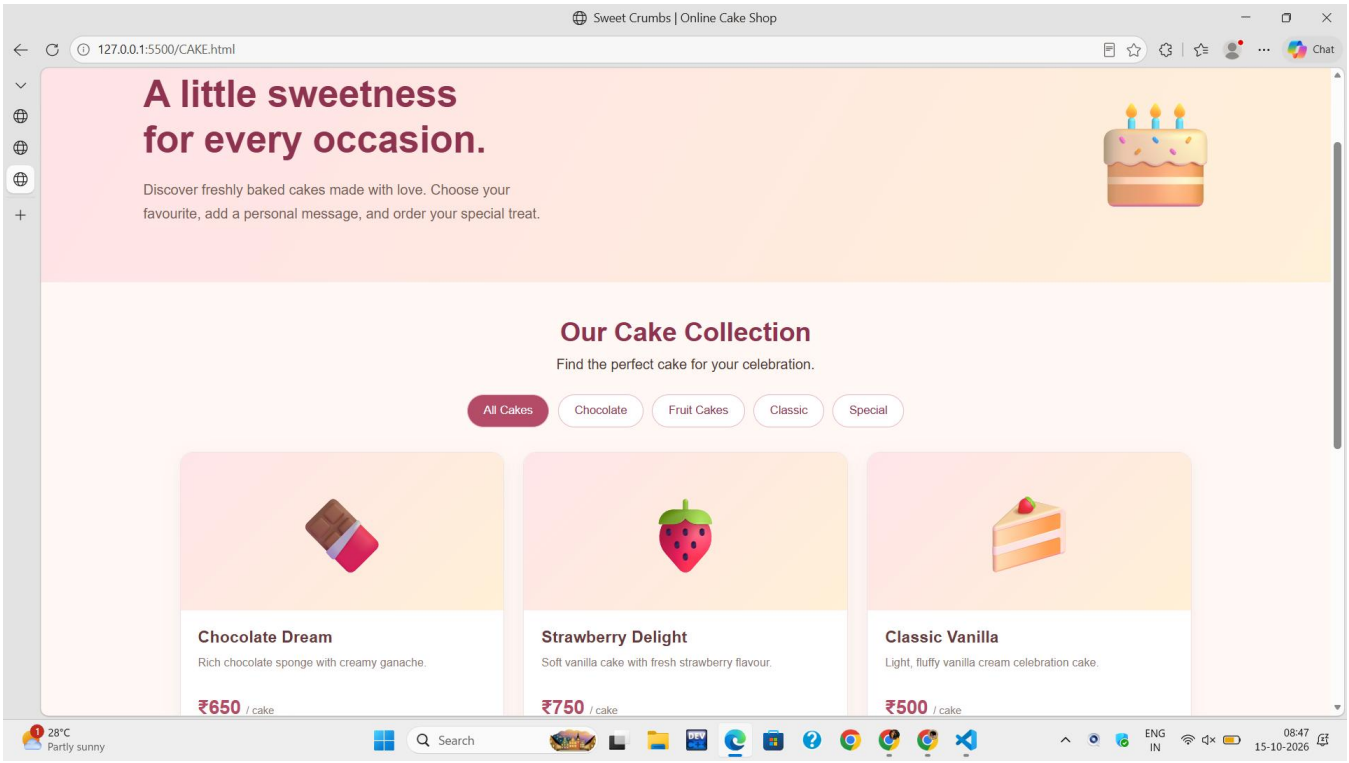

Result

Thus, an online cake ordering webpage with cake selection, delivery details, and total price calculation was created successfully.