

K-MEANS CLUSTERING ALGORITHM

AIM

To understand the K-Means clustering algorithm by grouping the Iris flowers into clusters for a given data set.

PROGRAM

```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
from sklearn.cluster import KMeans
from sklearn.metrics import silhouette_score

df = pd.read_csv('Iris.csv')
print(df.head())
features = df.iloc[:, :-1].values      # label is not used for clustering

# Elbow method
wcss = []
for k in range(1, 11):
    km = KMeans(n_clusters=k, init='k-means++', n_init=10, random_state=23)
    km.fit(features)
    wcss.append(km.inertia_)
    print(f"K = {k}<3} WCSS = {km.inertia_:.2f}")

plt.plot(range(1, 11), wcss, marker='o')
plt.title('Elbow method')
plt.xlabel('Number of clusters (K)')
plt.ylabel('WCSS')
plt.show()

# Final model with K = 3
kmeans = KMeans(n_clusters=3, init='k-means++', n_init=10, random_state=23)
labels = kmeans.fit_predict(features)


print("\nCluster centres:\n", kmeans.cluster_centers_.round(3))
print("Cluster sizes :", np.bincount(labels))
print("Silhouette score:", round(silhouette_score(features, labels), 4))

# Comparison with the actual species
print("\nClusters vs actual species:")
print(pd.crosstab(df['variety'], labels, colnames=['cluster']))

# Visualization (petal length vs petal width)
fig, ax = plt.subplots(1, 2, figsize=(11, 4))
ax[0].scatter(features[:, 2], features[:, 3], c=labels, cmap='viridis')
ax[0].scatter(kmeans.cluster_centers_[:, 2], kmeans.cluster_centers_[:, 3],
              s=200, c='red', marker='X', label='Centroids')
ax[0].set_title('K-Means clusters')
ax[0].set_xlabel('petal.length')
ax[0].set_ylabel('petal.width')
ax[0].legend()
actual = df['variety'].astype('category').cat.codes
ax[1].scatter(features[:, 2], features[:, 3], c=actual, cmap='viridis')
ax[1].set_title('Actual species')
ax[1].set_xlabel('petal.length')
ax[1].set_ylabel('petal.width')
plt.tight_layout()
plt.show()
```

OUTPUT


	sepal.length	sepal.width	petal.length	petal.width	variety
0	5.1	3.5	1.4	0.2	Setosa
1	4.9	3.0	1.4	0.2	Setosa
2	4.7	3.2	1.3	0.2	Setosa
3	4.6	3.1	1.5	0.2	Setosa
4	5.0	3.6	1.4	0.2	Setosa
K = 1 WCSS = 681.37					
K = 2 WCSS = 152.35					
K = 3 WCSS = 78.85					
K = 4 WCSS = 57.23					
K = 5 WCSS = 46.45					
K = 6 WCSS = 39.04					
K = 7 WCSS = 34.41					
K = 8 WCSS = 32.10					
K = 9 WCSS = 28.32					
K = 10 WCSS = 26.81					

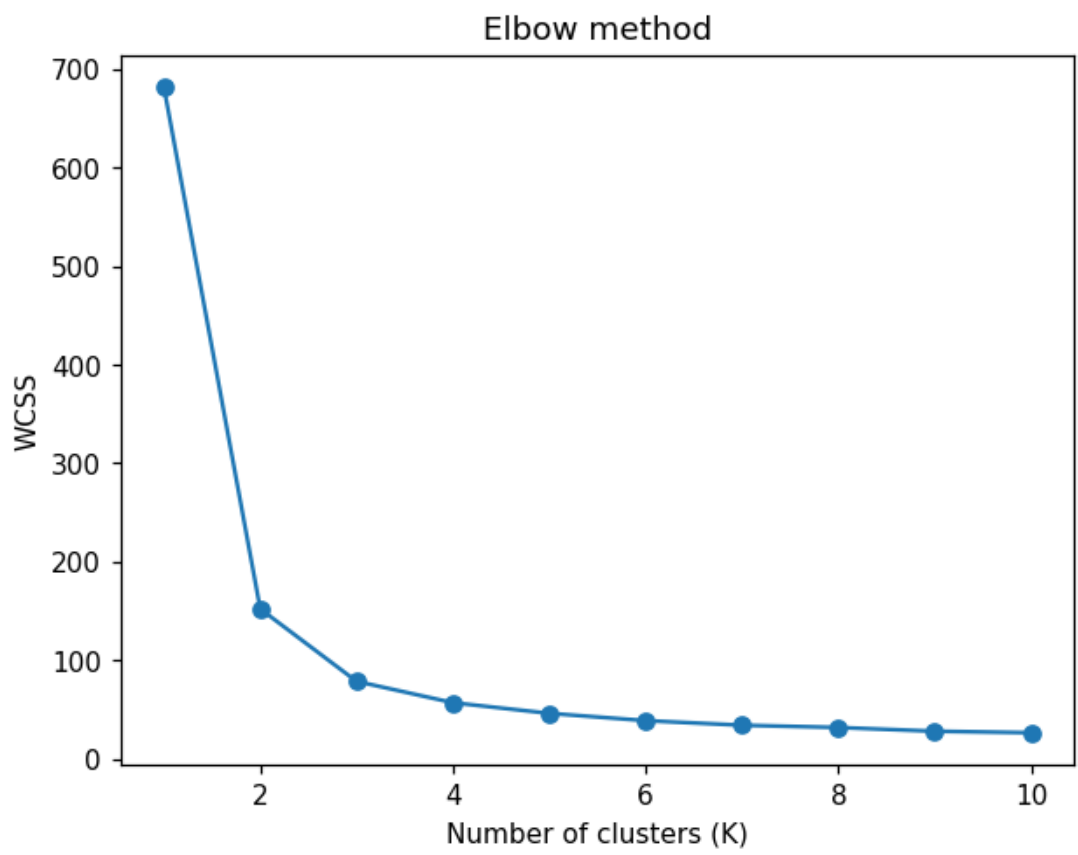

Cluster centres:
[[5.902 2.748 4.394 1.434]
[5.006 3.428 1.462 0.246]
[6.85 3.074 5.742 2.071]]
Cluster sizes : [62 50 38]
Silhouette score: 0.5528

Clusters vs actual species:

cluster	0	1	2
variety			
Setosa	0	50	0
Versicolor	48	0	2
Virginica	14	0	36

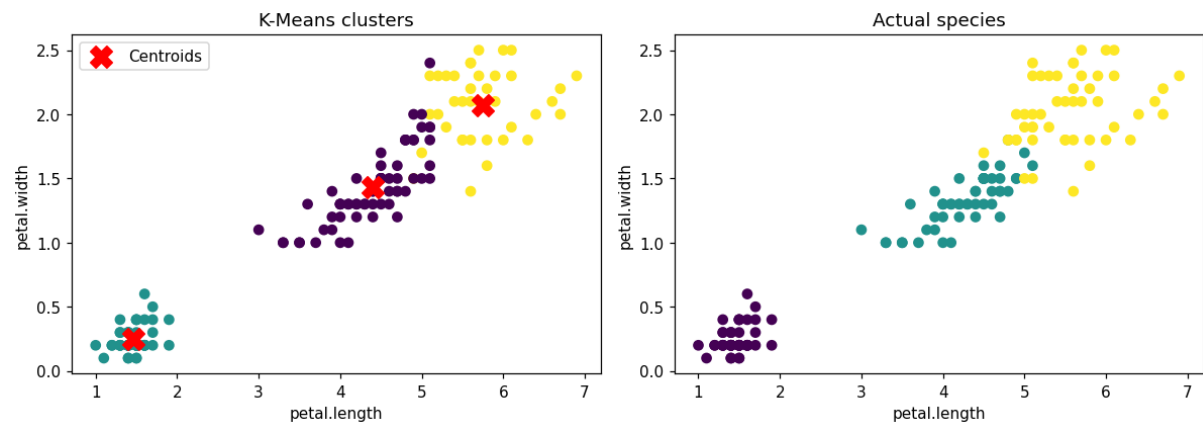

RESULT

Thus the K-Means clustering algorithm was implemented on the Iris data set. The Elbow method gave $K = 3$ and the clusters closely match the three actual species.