

1. **Open Git bash shell and create a new folder “GitDemo” and initialize as git repository**

```
dharanesh.r@PTPLL512 MINGW64 /d (master)
$ mkdir GitDemo
```

```
dharanesh.r@PTPLL512 MINGW64 /d (master)
$ cd GitDemo
```

2. **Git bash initializes the “GitDemo” repository.**

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ git init
Initialized empty Git repository in D:/GitDemo/.git/
```

3. **Create a file “welcome.txt” and add content to the file (use echo or cat command)**

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ echo "Welcome to Git Demo!" > welcome.txt
```

4. **To verify if the file “welcome.txt” is created, execute ls-al**

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ ls -al
total 9
drwxr-xr-x 1 dharanesh.r 1049089  0 Jul 21 16:47 ./
drwxr-xr-x 1 dharanesh.r 1049089  0 Jul 21 16:45 ../
drwxr-xr-x 1 dharanesh.r 1049089  0 Jul 21 16:46 .git/
-rw-r--r-- 1 dharanesh.r 1049089 21 Jul 21 16:47 welcome.txt
```

5. **To verify the content, execute the command cat filename**

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ cat welcome.txt
Welcome to Git Demo!
```

6. **Execute git status**

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ git status
On branch master
```

No commits yet


Untracked files:

(use "git add <file>..." to include in what will be committed)

welcome.txt

nothing added to commit but untracked files present (use "git add" to track)

7. Signup with GitHub and create a remote repository "GitDemo"

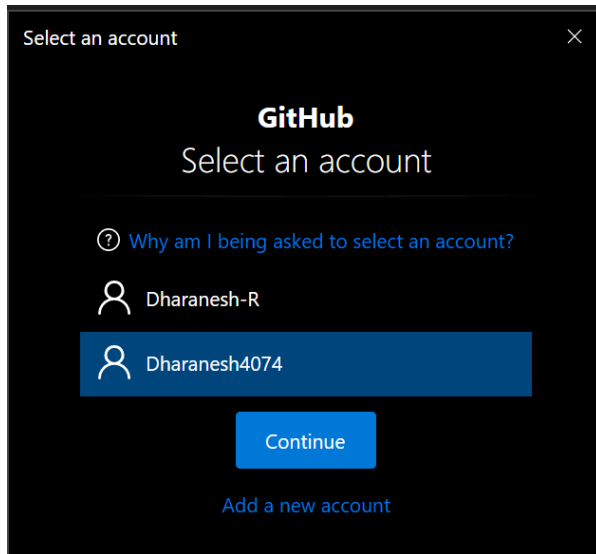

8. Add remote origin

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ git config --global user.name "Dharanesh4074"
```

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ git config --global user.email "dharanesh.r@payoda.com"
```

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ git remote add origin https://github.com/Dharanesh4074/git-training.git
```

9. Create files and push the local to remote repository.

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ git add .
warning: in the working copy of 'welcome.txt', LF will be replaced by CRLF the next time Git touches it
```

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ git commit -m "first"
[master (root-commit) 6723644] first
1 file changed, 1 insertion(+)
create mode 100644 welcome.txt
```

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ git branch main
```

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ git push -u origin main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 233 bytes | 116.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/Dharanesh4074/git-training.git
* [new branch]    main -> main
branch 'main' set up to track 'origin/main'.
```

10. Make changes in the remote and pull the changes to the local.

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ git pull origin main
From https://github.com/Dharanesh4074/git-training
* branch          main    -> FETCH_HEAD
Already up to date.
```

11. Create a .gitignore file to ignore contents of temp folder

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ mkdir temp
```

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ echo "temp/" > .gitignore
```

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$
```

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ git add .gitignore
warning: in the working copy of '.gitignore', LF will be replaced by CRLF the ne
xt time Git touches it
```

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ git commit -m "gitignore"
[master ec69a29] gitignore
1 file changed, 1 insertion(+)
create mode 100644 .gitignore
```

```
dharanesh.r@PTPLL512 MINGW64 /d/GitDemo (master)
$ git push -u origin main
branch 'main' set up to track 'origin/main'.
Everything up-to-date
```

1. What is Docker-compose.yaml file? Give sample docker-compose file.

Docker-compose.yaml is a configuration file used with Docker Compose to define and run multi-container Docker applications.

Sample docker-compose.yaml:

```
yaml
CopyEdit
version: '3'
services:
  web:
    image: nginx
    ports:
      - "8080:80"
  db:
    image: mysql:5.7
    environment:
      MYSQL_ROOT_PASSWORD: example
```

2. What is Docker hub?

Docker Hub is a cloud-based repository where Docker users can:

- Store and share container images
- Use official images from Docker
- Automate builds and deployment