Amazon S3

Buckets
General purpose buckets
Directory buckets
Table buckets
Vector buckets

Files
File systems

Access management and security
Access Points
Access Points for FSx
Access Grants
IAM Access Analyzer

Storage management and insights
Storage Lens
Batch Operations

Buckets

General purpose buckets | All AWS Regions | Directory buckets

General purpose buckets (1) Info

Buckets are containers for data stored in S3.

Copy ARN | Empty | Delete | Create bucket

dhaval-gandhi-sagemaker-practical-11-2026

0 matches

1

Name	AWS Region	Creation date

No matches

We can't find a match.

Clear filters

Account snapshot Info

View dashboard

Updated daily

Storage Lens provides visibility into storage usage and activity trends.

External access summary Info

Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

© 2026, Amazon Web Services, Inc. or its affiliates.

Successfully created bucket "dhaval-gandhi-sagemaker-practical-11-2026"

dhaval-gandhi-sagemaker-practical-11-2026 Info

Objects | Metadata | Properties | Permissions | Metrics | Management | File systems | Access Points

Objects (0)

Copy S3 URI | Copy URL | Download | Open | Delete | Actions | Create folder | Upload

Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more

Find objects by prefix

1

Name	Type	Last modified	Size	Storage class

No objects

You don't have any objects in this bucket.

Upload

Create folder Info

Use folders to group objects in buckets. When you create a folder, S3 creates an object using the name that you specify followed by a slash (/). This object then appears as folder on the console. Learn more

Your bucket policy might block folder creation
If your bucket policy prevents uploading objects without specific tags, metadata, or access control list (ACL) grantees, you will not be able to create a folder using this configuration. Instead, you can use the upload configuration to upload an empty folder and specify the appropriate settings.

Folder

Folder name

data /

Folder names can't contain "/". See rules for naming

Server-side encryption Info

Server-side encryption protects data at rest.

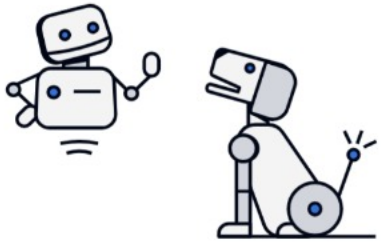
The following encryption settings apply only to the folder object and not to sub-folder objects.

Server-side encryption

Don't specify an encryption key

© 2026, Amazon Web Services, Inc. or its affiliates.

Setting up your managed AI development environment.



Set up SageMaker Studio

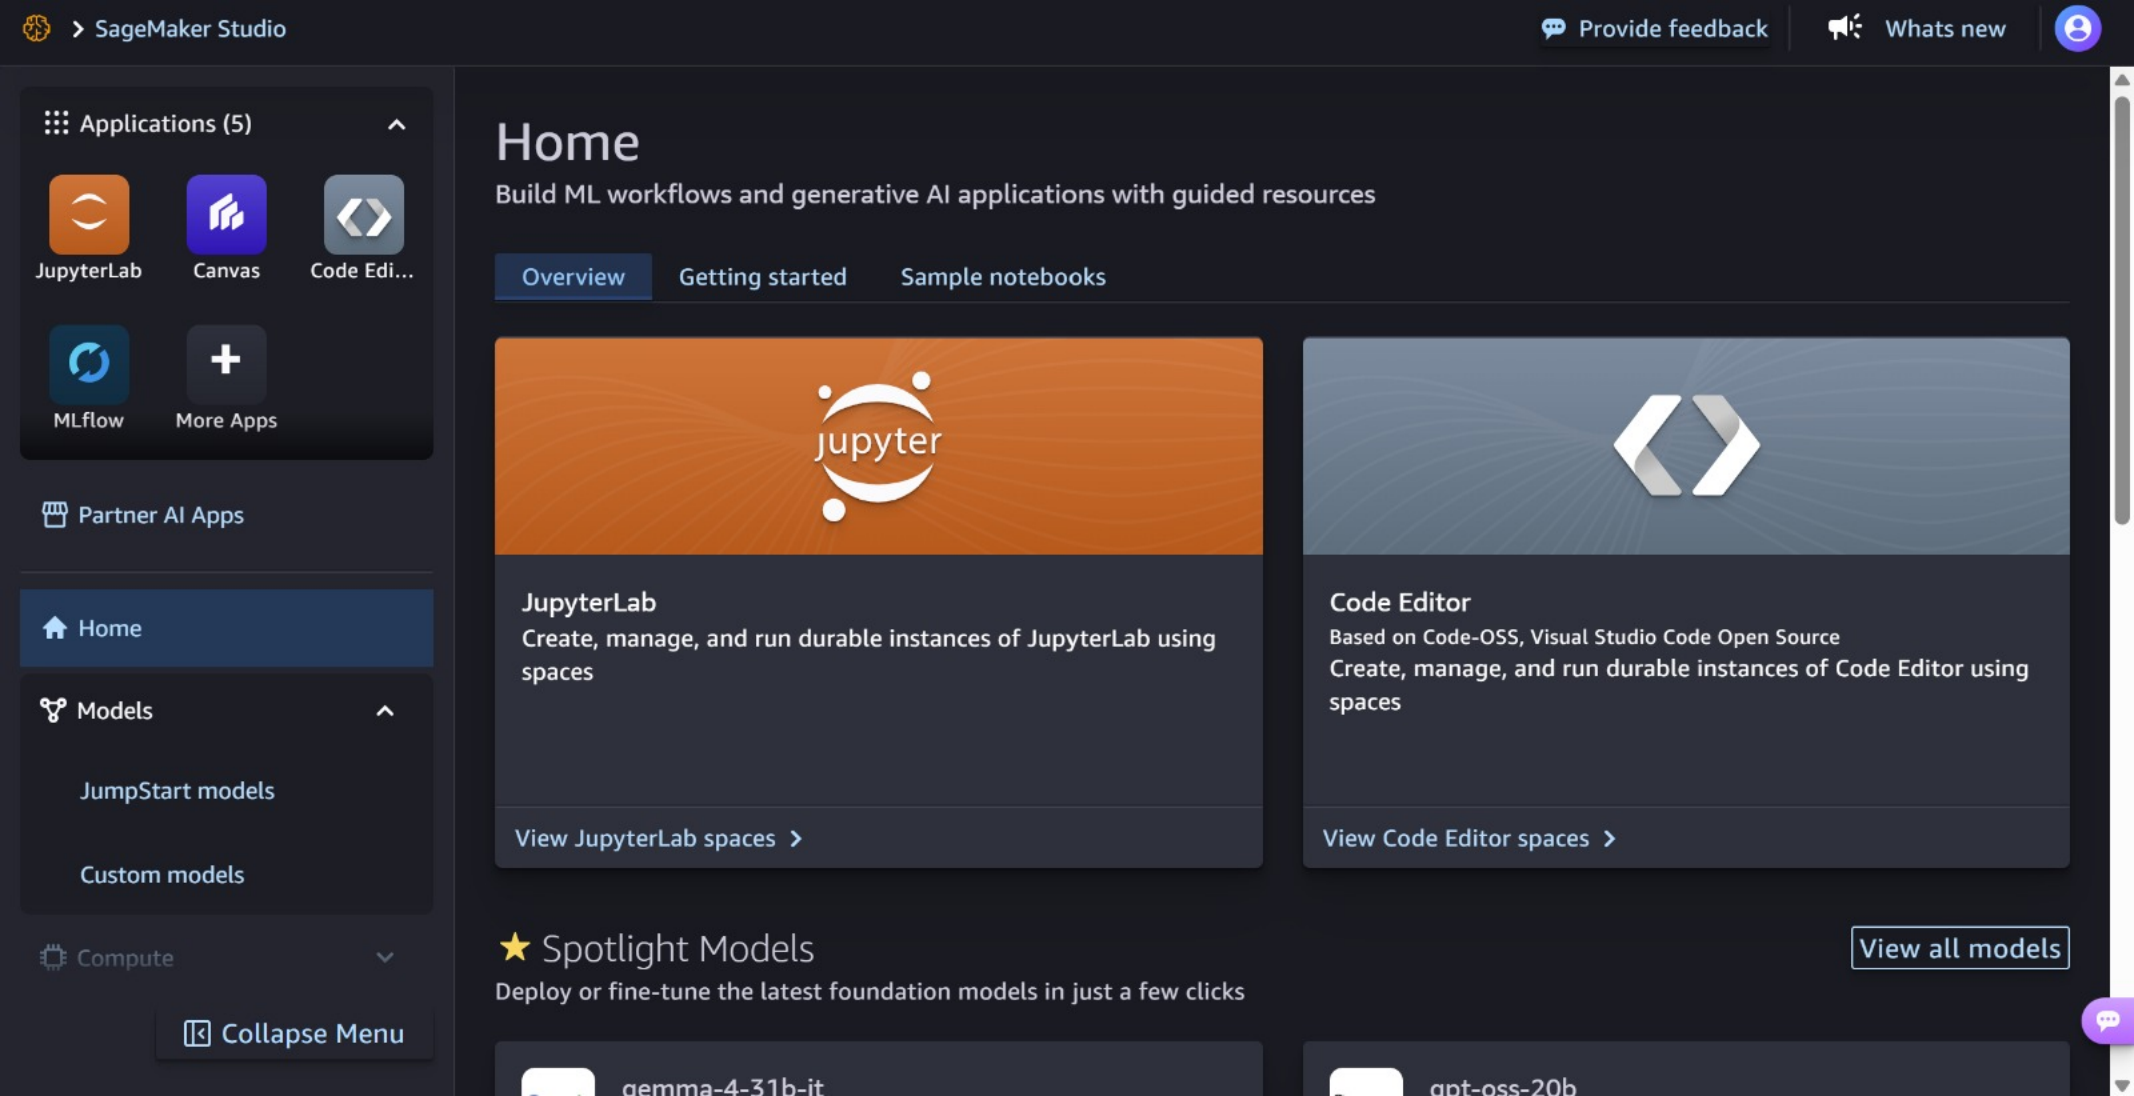
A free Studio environment will be set up for you to start building.

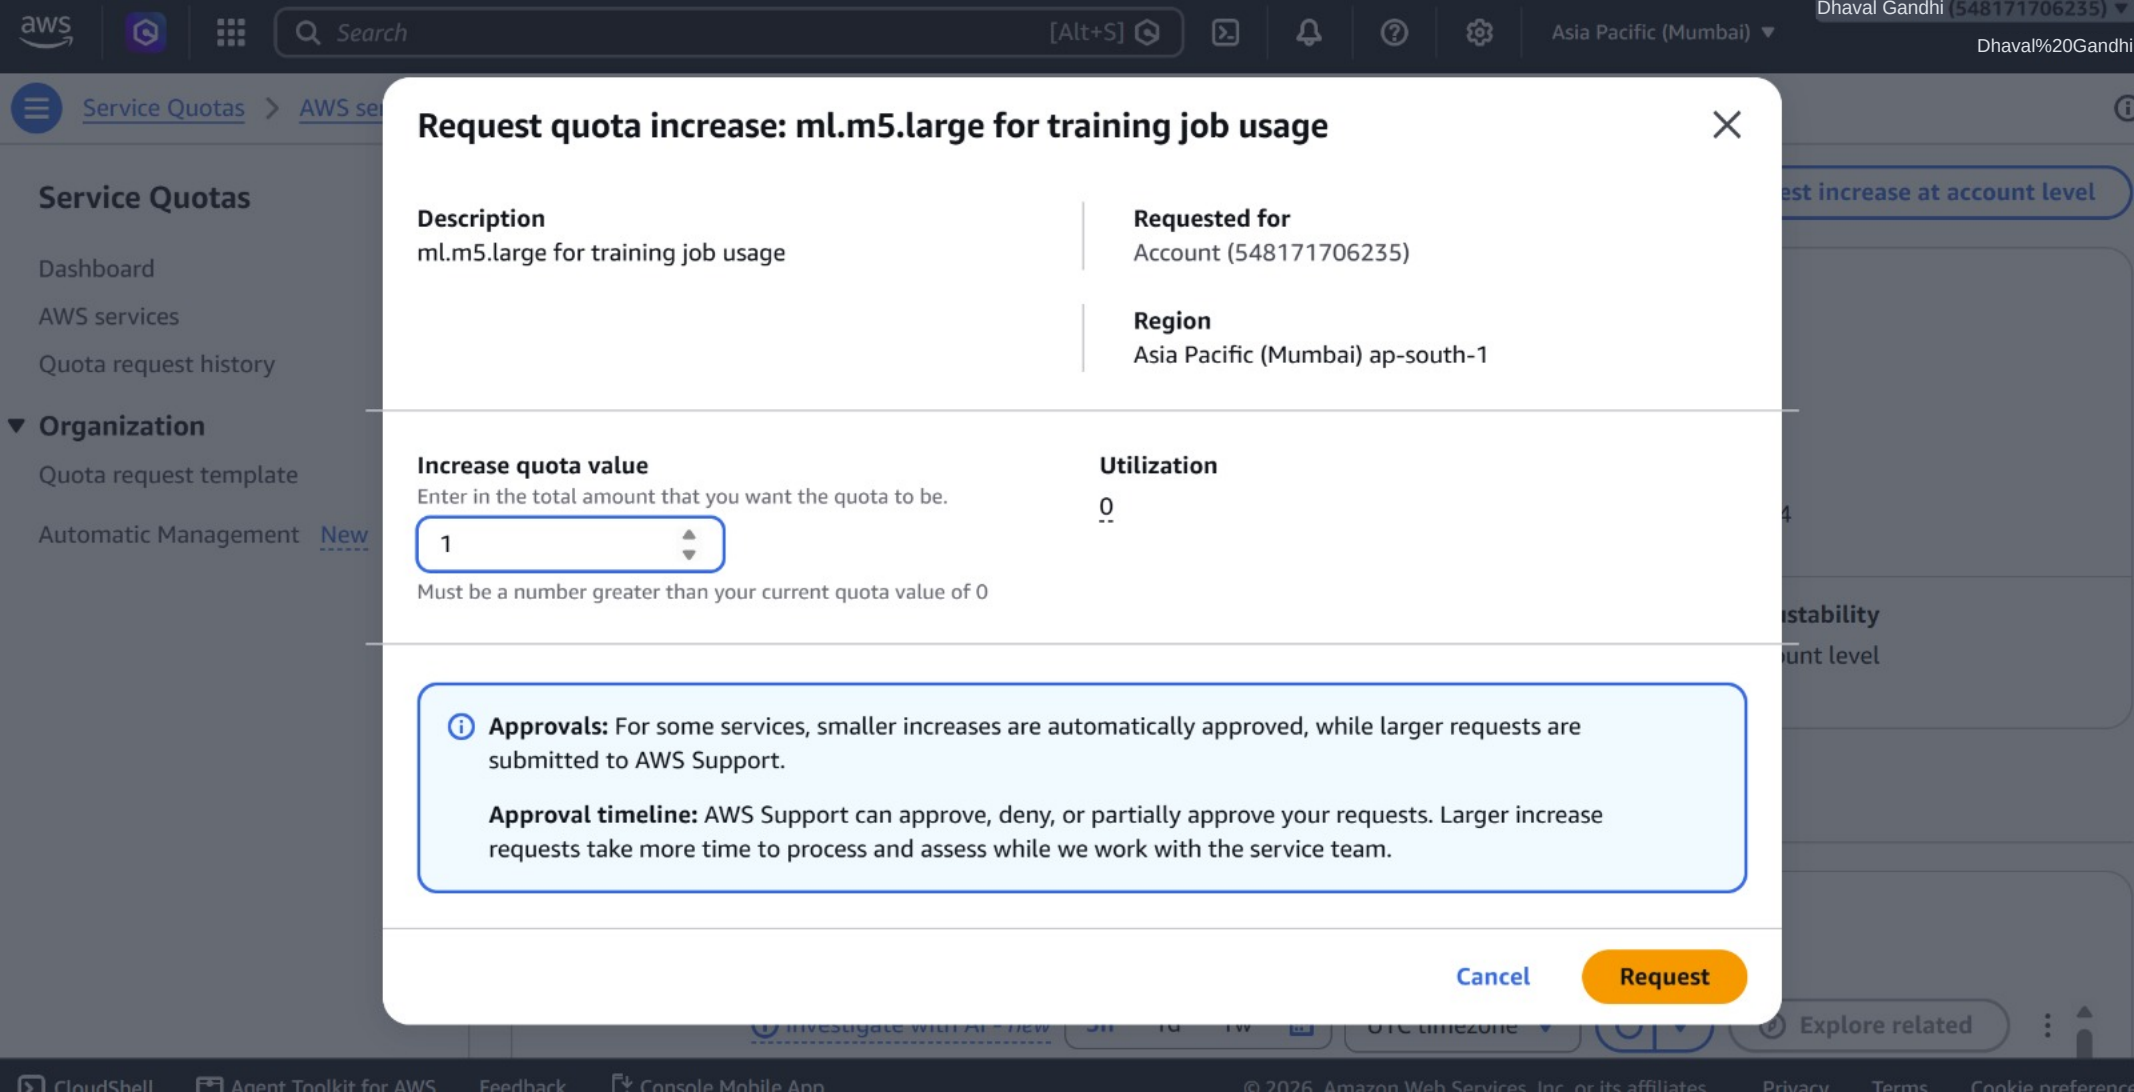
What gets created?

- New IAM role with AmazonSageMakerFullAccess policy
- Public internet access through secure gateway
- Secure workspace with standard encryption
- All SageMaker Studio applications and IDEs

32%

This process takes about 20 seconds to complete. Don't close this page during setup to avoid incomplete environment creation.


SageMaker Studio
Provide feedback
Whats new
Applications (5)
JupyterLab
Canvas
Code Edi...
MLflow
More Apps
Partner AI Apps
Home
Models
JumpStart models
Custom models
Compute
Collapse Menu
Home
Build ML workflows and generative AI applications with guided resources
Overview
Getting started
Sample notebooks
JupyterLab
Create, manage, and run durable instances of JupyterLab using spaces
View JupyterLab spaces
Code Editor
Based on Code-OSS, Visual Studio Code Open Source
Create, manage, and run durable instances of Code Editor using spaces
View Code Editor spaces
Spotlight Models
Deploy or fine-tune the latest foundation models in just a few clicks
View all models
gemma-4-31b-it
gpt-oss-20b


Request quota increase: ml.m5.large for training job usage
Description
ml.m5.large for training job usage
Requested for
Account (548171706235)
Region
Asia Pacific (Mumbai) ap-south-1
Increase quota value
Enter in the total amount that you want the quota to be.
1
Must be a number greater than your current quota value of 0
Utilization
0
Approvals: For some services, smaller increases are automatically approved, while larger requests are submitted to AWS Support.
Approval timeline: AWS Support can approve, deny, or partially approve your requests. Larger increase requests take more time to process and assess while we work with the service team.
Cancel
Request

Service Quotas

Dashboard
AWS services
Quota request history

Organization
Quota request template
Automatic Management New

Quota increase requested for ml.m5.large for training job usage. Your support case is 179050311800413. Go to Case

ml.m5.large for training job usage

Request increase at account level

Details

Description
ml.m5.large for training job usage

Quota code
L-611FA074

Quota ARN
arn:aws:servicequotas:ap-south-1:548171706235:sagemaker/L-611FA074

Utilization	Applied account-level quota value	AWS default quota value	Adjustability
0	0	0	Account level

Monitoring | Request history | Alarms | Tags

Monitoring

This displays a customizable CloudWatch embedded graph. Learn more

© 2026, Amazon Web Services, Inc. or its affiliates.

Quota increase requested for ml.m5.large for training job usage. Your support case is 179050311800413. Go to Case

Monitoring

This displays a customizable CloudWatch embedded graph. Learn more

Investigate with AI - new | 3h | 1d | 1w | UTC timezone | Explore related

ml.m5.large for training job usage - (Utilization %)

No data available.
Try adjusting the dashboard time range.

07:00 07:30 08:00 08:30 09:00 09:30 10:00

% Utilization

/

Name	Modified
.agent	5m ago
.cache	4m ago
.claude	7m ago
.config	4m ago
.ipython	4m ago
.jupyter	6m ago
.kiro	7m ago
.local	7m ago
.npm	7m ago
.sagemaker_sql_...	7m ago
.virtual_docume...	4m ago
.bashrc	7m ago
iris_model.joblib	4m ago
model.tar.gz	4m ago
Practical_11_Sag...	5m ago
test.csv	33m ago
train.csv	39m ago
untitled.chat	46m ago
xgboost-model	4m ago

Practical_11_SageMaker_Iri | Terminal 1 | Launcher

Code | Notebook | Cluster

[45]:
```
import time

while True:
    status = sm.describe_endpoint(
        EndpointName=final_endpoint
    )["EndpointStatus"]

    print("Endpoint status:", status)

    if status in ["InService", "Failed"]:
        break

    time.sleep(20)
```

```
Endpoint status: Creating
Endpoint status: Creating
Endpoint status: Creating
Endpoint status: Creating
Endpoint status: Creating
Endpoint status: Creating
Endpoint status: Creating
Endpoint status: InService
```

[46]:
```
import boto3
import json

runtime = boto3.client("sagemaker-runtime", region_name="YOUR_REGION")

response = runtime.invoke_endpoint(
    EndpointName="YOUR_ENDPOINT_NAME",
    ContentType="application/json"
```

New chat | Select a chat

UNTITLED

Kiro 15:06

You're not signed in to Kiro yet. Please run the following command in a terminal to sign in:

```
kiro-cli login --use-device-flow
```

I've opened a new terminal to help with that.

Would you like to get notified about official Jupyter news?

Open privacy policy | Yes | No

/

Name	Modified
.agent	5m ago
.cache	4m ago
.claude	7m ago
.config	4m ago
.ipython	4m ago
.jupyter	6m ago
.kiro	7m ago
.local	7m ago
.npm	7m ago
.sagemaker_sql_...	7m ago
.virtual_docume...	4m ago
.bashrc	7m ago
iris_model.joblib	4m ago
model.tar.gz	4m ago
Practical_11_Sag...	5m ago
test.csv	33m ago
train.csv	39m ago
untitled.chat	46m ago
xgboost-model	4m ago

Practical_11_SageMaker_Iri | Terminal 1 | Launcher

Code | Notebook | Cluster

[53]:
```
import boto3

runtime = boto3.client(
    "sagemaker-runtime",
    region_name="ap-south-1"
)

# Iris features:
# sepal length, sepal width, petal length, petal width
data = "5.1,3.5,1.4,0.2"

response = runtime.invoke_endpoint(
    EndpointName="iris-final-endpoint-11",
    ContentType="text/csv",
    Body=data
)

result = response["Body"].read().decode("utf-8")

print("Prediction:", result)
```

```
Prediction: 0.0
```

[54]:
```
import boto3

runtime = boto3.client(
    "sagemaker-runtime",
    region_name="ap-south-1"
```

+ New chat | Select a chat

UNTITLED

Kiro 15:06

You're not signed in to Kiro yet. Please run the following command in a terminal to sign in:

```
kiro-cli login --use-device-flow
```

I've opened a new terminal to help with that.

Would you like to get notified about official Jupyter news?

Open privacy policy | Yes | No

File Edit View Run Kernel Git Tabs Settings Help

default-20260927T143735 / practical-11

Practical_11_SageMaker_Iri | Terminal 1 | Launcher

Code | Notebook | Cluster

```
print("Prediction:", result)
```

```
Prediction: 0.0
```

[54]:

```
import boto3

runtime = boto3.client(
    "sagemaker-runtime",
    region_name="ap-south-1"
)

data = "5.1,3.5,1.4,0.2"

response = runtime.invoke_endpoint(
    EndpointName="iris-final-endpoint-11",
    ContentType="text/csv",
    Body=data
)

result = response["Body"].read().decode("utf-8")

print("Prediction:", result)
```

```
Prediction: 0.0
```

[ ]:

/

Name	Modified
.agent	5m ago
.cache	4m ago
.claude	7m ago
.config	4m ago
.ipython	4m ago
.jupyter	6m ago
.kiro	7m ago
.local	7m ago
.npm	7m ago
.sagemaker_sql_...	7m ago
.virtual_docume...	4m ago
.bashrc	7m ago
iris_model.joblib	4m ago
model.tar.gz	4m ago
Practical_11_Sag...	4m ago
test.csv	33m ago
train.csv	39m ago
untitled.chat	46m ago
xgboost-model	4m ago

New chat | Select a chat

UNTITLED

Kiro 15:06

You're not signed in to Kiro yet. Please run the following command in a terminal to sign in:

```
kiro-cli login --use-device-flow
```

I've opened a new terminal to help with that.

Would you like to get notified about official Jupyter news?

Open privacy policy | Yes | No

Simple 1 1 Python 3 (ipykernel) | Idle Fully initialized Instance MEM 56% Cookie Preferences Mode: Edit Ln 1, Col 1 Practical_11_SageMaker_Iris.ipynb