16/7/26
Ex 1

BASIC NETWORKING COMMANDS

AIM:

Study of various Network commands used in Linux windows.

BASIC NETWORKING COMMANDS:

1. arp-a:

ARP is a short form of address resolution protocol. It will show the IP address of your computer along with the IP address & MAC address of your router

2. hostname:

This is the simplest of all TCP/IP commands. Displays name of computer

3. nbtstat -a:

This command helps solve problem with NetBIOs name resolution (nbt - NET BIOS over TCP/IP)

4. ipconfig:

This command display detailed config info about TCP/IP

5. nslookup:

This is a tool used to perform DNS lookups in Linux to display DNS details

6. pathping


Traces route to destination address then launch a 25 second test of each route along the way

7. Ping: (Packet Internet Groups)

It tests connectivity b/w 2 nodes

8. Route:

Used to show/manipulate the IP routing table

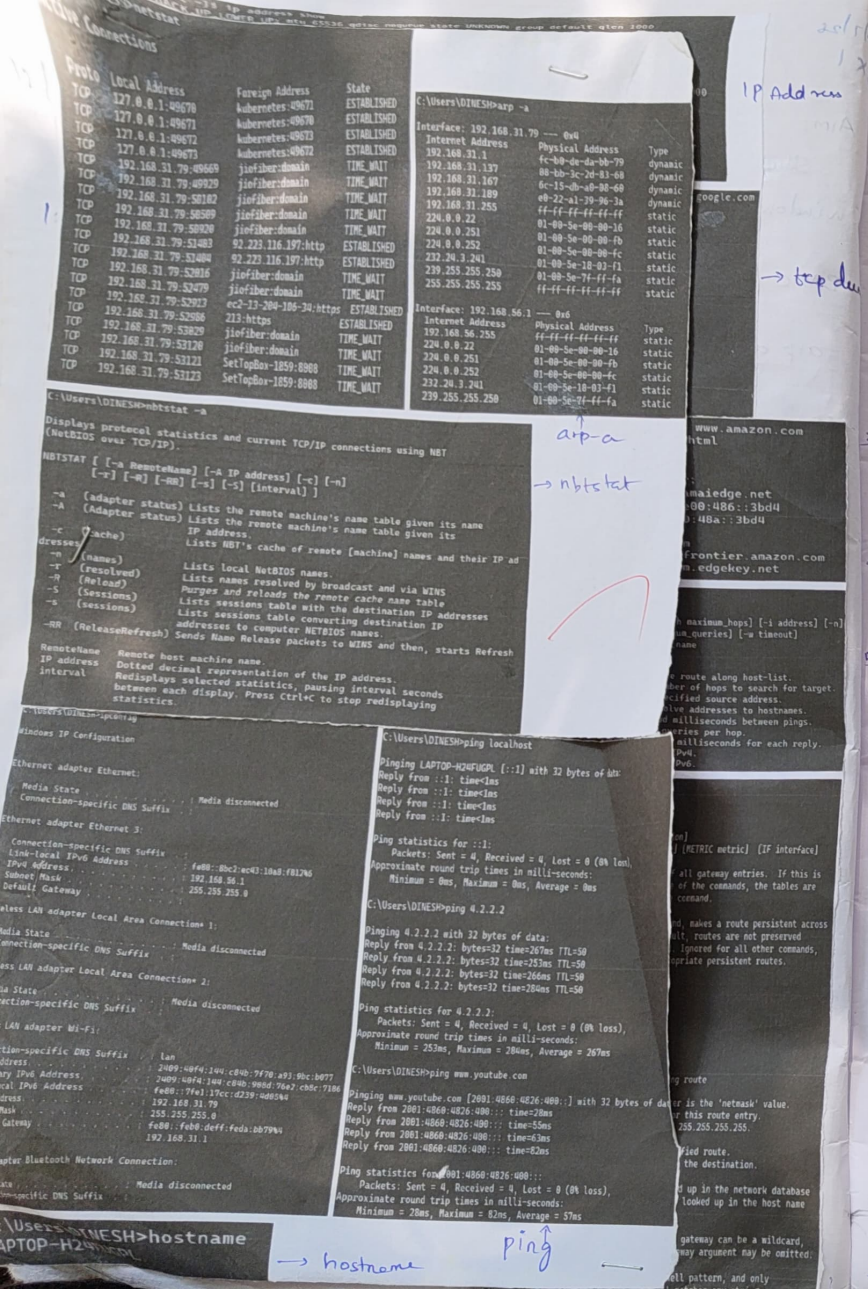

IP Address

→ tcp dump

google.com

arp -a

→ nbtstat

www.amazon.com

→ hostname

ping

Linux Networking Commands

1. ip:

Basic command which admins trate the need in daily work from setting up new systems and assigning IPs to troubleshooting existing system

2. ipconfig:

It is a staple in many sysadmin's tool belt for configuring and troubleshooting networks. It has since been replaced by the ip command discussed above

3. mtr:

MTR is a program with a command-line interface that serves as a network diagnostic & troubleshooting tool.

4. tcpdump:

It is designed for capturing & displaying packets

5. ping:

A tool that verifies IP-level connectivity to another TCP/IP computer by sending Internet Control Message Protocol (ICMP) Echo Request messages. Ping is the primary TCP/IP command used to troubleshoot

Result:

The linux & windows networking commend has been executed successfully