Unit – 5 Implementation and Maintenance

Introduction

- System Implementation is the process of converting the physical system specification into working and reliable software and hardware document the work that has been done and provide help for current as working computer code by the programming team.
- Depending on the size and complexity of the system, coding can be involved, intensive activity.
- Once coding has begun, the testing process can begin and proceed in parallel. As each program module is produced, it can be tested individually, then as part of a larger program, and then as part of a larger system.
- Although testing is done during implementation, we must begin planning for testing earlier in the project.
- Planning involves determining what needs to be tested and collecting test data. This is often done during the analysis phase
 Lecause testing requirements are related to system requirements


System Implementation



- **Installation** is the process during which the current system is replaced by the new system. This includes conversion of existing data, software, documentation, and work procedures to those consistent with the new system.
- Although the process of documentation proceeds throughout the life cycle, it receives, formal attention during the implementation phase because the end of implementation largely marks the end of the analysis team's involvement in systems development.
- Larger organizations also tend to provide training and support to computer users throughout the organization. Some of the training and support is very specific to particular application systems, whereas the rest is general to particular operating systems or off-the-shell software packages.



Implementation

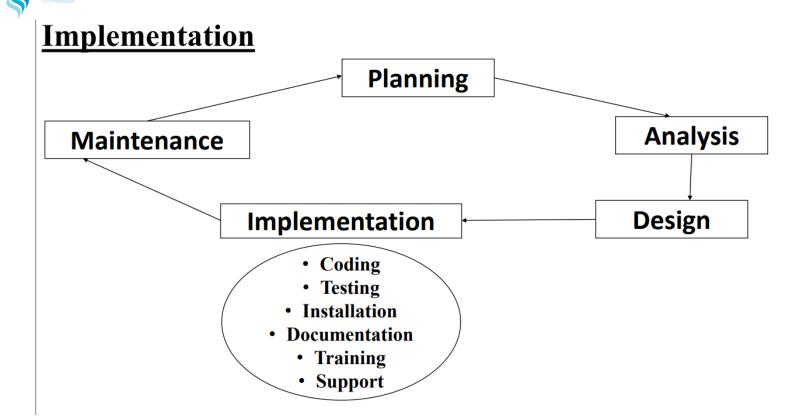



Process of Database Design



- Software testing can be stated as the process of verifying and validating that a software or application is bug free, meets the technical requirements as guided by it's design and development and meets the user requirements effectively and efficiently with handling all the exceptional and boundary cases.
- Software testing is a method of assessing the functionality of a software program. The process of software testing aims not only at finding faults in the existing software but also at finding measures to improve the software in terms of efficiency, accuracy and usability.
- It mainly aims at measuring specifications, functionality and performance of a software program or application.



Application of Software Testing

- 1. Cost E
- 1. Cost Effective Development: Early testing saves time and cost in many aspects, however reducing the cost without testing may result in improving design of a software application rendering the product useless.
- 2. Product Improvement: During the SDLC phases, testing is never a time-consuming process. However diagnosing and fixing the errors, identified during proper testing is a time consuming but productive activity.
- 3. Test Automation: It reduces testing time, but it is not possible to start test automation at any time during software development. It should be started when the software has been manually tested and is stable to some extent.

 Moreover, test automation can never be used if requirements keep changing.
- 4. Quality Check: Software testing helps in determining following set of properties of any software such as:
- Functionality
- Reliability
- Usability
- Efficiency
- Maintainability
- Portability



- 1. Inspections: A testing technique in which participant examine program code for predictable language specific error. Syntax, grammar and some other routine errors can be checked by automated inspection software. 60-90 % of all software effect as well as provide programmers with feedback that enables them to avoid making the same types of errors in future work.
- 2. Desk Checking: It is an informal manual test that programmers can use to verify coding and algorithm logic before a program launch. This enables them to spot errors that might prevent a program from working as it should. Modern debugging tools make desk checking less essential than it was in the past, but it can be still be a useful way of spotting logic errors.
- It refers to the manual approach of reviewing source code (sitting a desk), rather than running it through a debugger or another automated process, in some cases, a programmer may even use a pencil and paper to record the process and output of function within a program. For example, the developer may track the value of one or more variables in a function from beginning to end. Manually going through a code line by line help a programmer catch improper logic or inefficiencies that a software debugger would not.
- While desk checking is useful for uncovering logic errors and other issues within a programs source code, it is time consuming and subject to human error. Therefore, an IDE or debugging tool is better suited for detecting small problems, such as syntax errors. It is also helpful to have more than one developer desk check a program to reduce the likelihood or overlooking errors in the source code.
- A testing technique in which a programmer or someone else who understands the logic of the program works through the code with a paper and a pencil. The reviewer acts as the computer, mentally checking meach-steps and its results for the entire set of computer instructions.

- **3. Unit Testing:** It focuses on smallest unit of software design. In this we test an individual unit or group of inter related units. It is often done by programmer by using sample input and observing its corresponding outputs. Automated technique whereby each module is tested alone in an attempt to discover any errors that may exist in the module's code.
- **4. Integration Testing**: The process of bringing together more than one modules that a program comprises for testing purposes. Integration testing is testing in which a group of components are combined to produce output. Also, the interaction between software and hardware is tested in integration testing if software and hardware components have any relation. It may fall under both while both white box testing and black box testing.
- 5. System Testing: The process of bringing together of all the programs that a system comprises for testing purposes. System testing is the testing to ensure that by putting the software in different environments (e.g. Operating Systems) it still works. System testing is done with full system implementation and environment. Programs are typically integrated in a top-down incremental fashion. The system can be tested in two ways:



- A) Black Box Testing: It is defined as a testing technique in which functionality of the Application Under Test is tested without looking at the internal code structure, implementation details and knowledge of internal paths of the software. This type of testing is based entirely on software requirements and specifications. In this testing, we just focus on inputs and output of the software system without bothering about internal knowledge of the software program. In Black box test (also called functional test) internal code of the program are tested. It is called black box testing because the test cases are totally hidden for the general users.
- B) White Box Testing: White Box Testing is a testing technique that examines the program structure and derives test data from the program logic/code. It is a software testing methodology that uses a program's source code to design tests and test cases for quality assurance (QA). The code structure is known and understood by the tester in white box testing. White box testing is also called glass box testing because the test cases are totally visible to the general users and they can also make test cases.

Difference between Black Box Testing and White Box Testing

100		
	11/12	

Black Box Testing	White Box Testing
It is the software testing method which is used to test the software without knowing the internal structure of code or program.	It is the software testing method in which internal structure is being known to tester who is going to test the software.
This type of testing is carried out by testers	Generally, this type of testing is carried out by software developers
Implementation Knowledge is not required to carry out Black Box Testing	Implementation Knowledge is required to carry out White Box Testing
Programming Knowledge is not required to carry out Black Box Testing	Programming Knowledge is required to carry out White Box Testing
Testing is applicable on higher levels of testing like System Testing, Acceptance Testing.	Testing is applicable on lower level of testing like Unit Testing, Integration Testing.



Difference between Black Box Testing and White Box Testing

Black Box Testing	White Box Testing
It means functional test or external testing.	It means structural test or interior testing.
Testing is primarily concentrate on the functionality of the system under test.	Testing is primarily concentrated on the testing of program code of the system under test like code structure, branches, conditions, loops etc.
The main aim of this testing is to check on what functionality is performing by the system under test.	The main aim of this testing is to check on how system is performing.
It can be started based on Requirement Specifications documents.	It can be started based on Detail Design documents.
The Functional testing, Behavior testing, Close box testing is carried out under Black Box Testing, so there is no required of the programming knowledge.	The Structural testing, Logic testing, Path testing, Loop testing, Code coverage testing, Open box testing is carried out under White Box Testing, so there is compulsory to know about programming knowledge.



- 6. Stub Testing A technique used in testing modules, especially where modules are written and tested in a top down fashion, where a few lines of codes are used to substitute for subordinate modules. Top-level modules contain many call to subordinate modules, we may wonder how they can be tested if the lower level modules haven't been written yet. This is called stub testing.
- 7. User Acceptance Testing:
- Once the system tests have been satisfactorily completed, the system is ready for acceptance testing, which is testing the system in the environment where it will eventually be used.
- A) Alpha Testing: User testing of a complete information system using simulated data. The types of tests performed during alpha testing include the following:
- i. Recovery Testing: Forces the software to fail in order to verify that recovery is properly performed.
- ii. Security Testing: Verifies that protection mechanisms built into the system will protect it from improper penetration.
- iii. Stress Testing: Tries to break the system (e.g. What happens when a record is written to the database with incomplete information or what happens under extreme online transaction loads or with a large number of concurrent users).
- iv. Performance Testing: Determines how the system performs in the range of possible environments in which it may be used (e.g. different hardware configurations, networks, operating systems).



• B) Beta

• **B) Beta Testing:** User testing of a completed information system using real data in the real user environment. The intent of the beta test is to determine whether the software, documentation, technical support and training activities work as intended. Beta testing can be viewed as a rehearsal of the installation phase.



Installation

- The process of moving from the current information system to the new one is called installation.
- In this activity, all the users must give up their reliance (dependence / confidence / trust) on the current system and begin to rely on new system.
- There are different ways and an approach an organization decides to use will depend on the scope and complexity of the change associated with the new system and the organization's risk factor. Different ways of installation are:
- 1. Direct Installation: Changing over from the old information system to a new one by turning off the old system when the new one is turned on. Any errors resulting from the new system will have a direct impact on the users. If the new system fails, considerable delay may occur until the old system can again be made operational and business transactions are reentered to make the database up to date. Direct installation can be very risky. Direct installation requires a complete installation of the whole system.
- For a large system, this may mean a long time until the new system can be installed, thus delaying system benefits or even missing the opportunities that motivated the system request. It is the least expensive installation method, and it creates considerable interest in making the installation a success.



Installation

- 2. Parallel Installation: Running the old information system and the new one at the same time until management decides the old system can be turned off. All of the work done by the old system is concurrently performed by the new system. Outputs are compared to help determine whether the new system is performing as well as the old. Errors discovered in the new system do not cost the organization much, if anything, because errors can be isolated and the business can be supported with the old system.
- Because all work is essentially done twice, a parallel installation can be very expensive, running two systems implies employing two staffs to operate and maintain. A parallel approach can also be confusing to users because they must deal with both systems. A parallel approach may not be feasible, especially if the users of the system cannot tolerate redundant effort or if the size of the system is large.
- **3. Pilot Installation**: It is also known as single-location installation. Rather than converting all of the organization at once, single location installation involves changing from the current to the new system in only one place or in a series of separate sites over time. The single location may be a branch office, a single factory, or one department, and the actual approach used for installation in that location may be any of the other approaches. The key advantage to single location installation is that it limits potential damage and potential cost by limiting the effects to a single site.



Installation

- 3. Pilot Installation: Once management has determined that installation has been successful at one location, the new system may be deployed in the rest of the organization, possibly continuing with installation at one location at a time. Problems with the system can be resolved before deployment to other sites. Even though the single location approach may be simpler for users, it still places a large burden on information system staff to support two versions of the system. Problems are isolated at one site at a time. If staff members can devote all of their efforts to success at the pilot site. If different locations require sharing of data, extra programs will need to be written to synchronize the current and new systems.
- **4. Phased Installation**: It is also called staged installation. Different parts of the old and new systems are used in cooperation until the whole new system is installed. By converting gradually, the organization's risk is spread out over time and place. Also phased installation allows for some benefits from the new system before the whole system is ready. For example, a new data-capture methods can be used before all reporting modules are ready. For a phased installation, the new and replaced systems must be able to coexist and probably share data. Thus, bridge programs connecting old and new databases and programs often must be built. Sometimes the new sand old systems are so incompatible that pieces of the old system cannot be incrementally replaced so this strategy is not feasible. A phased approach requires careful version control, repeated conversations at each phase, and a long period of change, which may be frustrating and confusing to users.



Documenting the System

- Documentation is the process of collecting, organizing, storing and maintaining a complete record of system and other documents used or prepared during the different phases of the life cycle of system. System cannot be considered to be complete, until it is properly documented. Proper documentation of system is necessary due to the following reasons:
 - 1. It solves the problem of indispensability of an individual for an organization. Even if the person, who has designed or developed the system, leaves the organization, the documented knowledge remains with the organization, which can be used for the continuity of that software.
 - 2. It makes system easier to modify and maintain in the future. The key to maintenance
 is proper and dynamic documentation. It is easier to understand the concept of a
 system from the documented records.
 - 3. It helps in restarting a system development, which was postponed due to some reason. The job need not be started from scratch, and old ideas may still be easily recapitulated from the available documents, which avoids duplication of work, and saves lot of times and effort.



Types of Documentation



System Documentation: System documentation records detailed information about a system's design specification, its internal workings and its functionality. System documentation is intended primarily for maintenance programmers. It contains the following information:

- A description of the system specifying the scope of the problem, the environment in which it functions, its limitation, its input requirement, and the form and type of output required.
- Detailed diagram of system flowchart and program flowchart.
- A source listing of all the full details of any modifications made since its development.
- Specification of all input and output media required for the operation of the system.
- Problem definition and the objective of developing the program.
- Output and test report of the program.
- Upgrade or maintenance history, if modification of the program is made.

Types of Documentation



System Documentation: There are two types of system documentation. They are:

- i. Internal Documentation: Internal documentation is part of the program source code or is generated at compile time.
- **ii. External Documentation:** External documentation includes the outcome of structured diagramming techniques such as dataflow and entity-relationship diagrams.

User Documentation: User documentation consists of written or other visual information about an application system, how it works and how to use it. User documentation is intended primarily for users. It contains the following information:

- i. Set up and operational details of each system.
- ii. Loading and unloading procedures.
- iii. Problems which could arise, their meaning reply and operation action.
- iv. Special checks and security measures.
 - Quick reference guides about operating a system in a short, concise format.

Training and Supporting Users

- - The type of training needed will vary by system type and user expertise. Types of training methods are:
 - Resident expert
- Traditional instructor-led classroom training
- E-learning/distance learning
- Blended learning (combination of instructor-led and e-learning)
- Software help components
- Electronic performance support system: component of a software package or an application in which training and educational information is embedded.
- External sources, such as vendors





Training and Supporting Users

- Samo
 - Computing supports for users has been provided in one of a few forums:
- i. Automating support: Online support forums provide users access to information on new releases, bugs and tips for more effective users access to information on new releases, bugs and tips form more effective usage. Forums are offered over the internet or over company intranets.
- ii. Providing support through a help desk: A help desk is an information systems department function and is staffed by IS personnel. The help desk is the first place users should call when they need assistance with an information system. The help desk staff members either deal with the users questions or refer the users to the most appropriate person.



12/30/2022

System Maintenance

- The process of monitoring, evaluating, and modifying of existing information systems to make required or desirable improvements may be termed as System Maintenance.
- System maintenance is an ongoing activity, which covers a wide variety of activities, including removing program and design errors or significant enhancement to correct specification errors or accommodate new requirements.
- When a system is in the maintenance phase, some person within the systems
 development group is responsible for collecting maintenance requests from users users and
 other interested parties, such as system auditors, data center and network management
 staff, and data analysts.
- Once collected, each request is analyzed to better understand how it will alter the system and what business benefits and necessities will result from such a change.
- • If the change request is approved, a system change is designed and then implemented. The results obtained from the evaluation process help the organization to determine whether its information systems are effective and efficient or otherwise.





System Maintenance



- There are four major activities occur within maintenance:
- 1. Obtain maintenance requests: In this step a formal process be established whereby users can submit system change requests. When developing the procedures for obtaining maintenance requests, organizations must also specify an individual within the organization to collect these requests and manage their dispersal to maintenance personnel.
- 2. Transforming requests into changes: Once a request is received, analysis must be performed to identify the of the scope of the request. It must be determined how the request will affect the current system and how long such a project will take. As with the initial development of a system, the size of a maintenance request can be analyzed for risk and feasibility.
- **3. Designing changes:** Next, a change request can be transformed into a formal design change, which can then be fed into the maintenance implementation phase.
- **4. Implementing changes**: In this activity once the change design is approved, proposed changes are implemented in respective components of the system.



Analogy between SDLC and System Maintenance


- Many similarities exist between the SDLC and the activities within the maintenance process.
- The first phase of the SDLC planning in analogous to the maintenance process of obtaining a maintenance request.
- The SDLC analysis phase is analogous to the maintenance process of transforming requests into a specific system change.
- The SDLC design phase, of course, equates to the designing changes process (step 3).
- Finally, the SDLC phase implementation equates to step 3, implementing changes.
- This similarity between the maintenance process and the SDLC is no accident.
- The concept and technique used to initially develop a system are also used to maintain it





Analogy between SDLC and System Maintenance



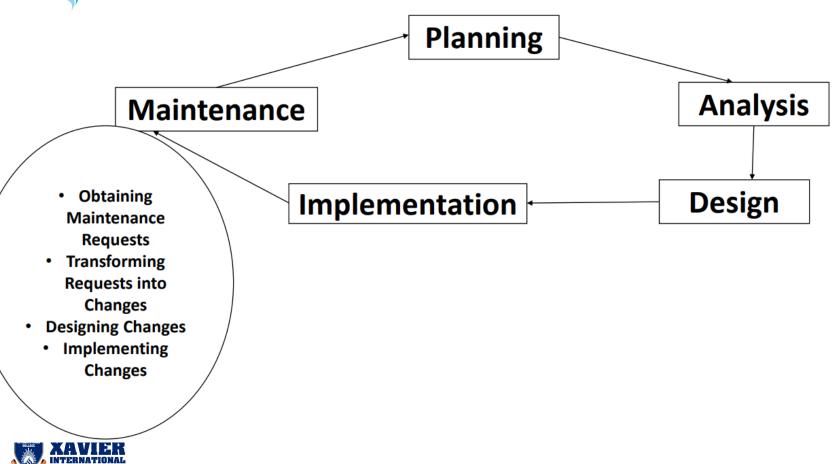




Conducting Maintenance

- A significant portion of the expenditures for information systems within organizations does
 not go to the development of new systems but to the maintenance of existing systems. We
 will describe various types of maintenance, factors influencing the complexity and cost of
 maintenance, and alternatives for managing maintenance.
- Maintenance processes vary considerably depending on the type of system being maintained, the development process used in the organization and the people involved in the process. However, the maintenance process is triggered by a set of change requests from system users, management or customers.
- The cost and impact of these changes are assed to see how much the system is affected by the change and how much it might costs to implement the change. If the proposed changes are accepted, new release of the system is planned.
- During release planning, all the proposed changes are considered.
- A decision is then made on which changes to implement in the next version of the system. The changes are implemented and validated.



The Maintenance Process



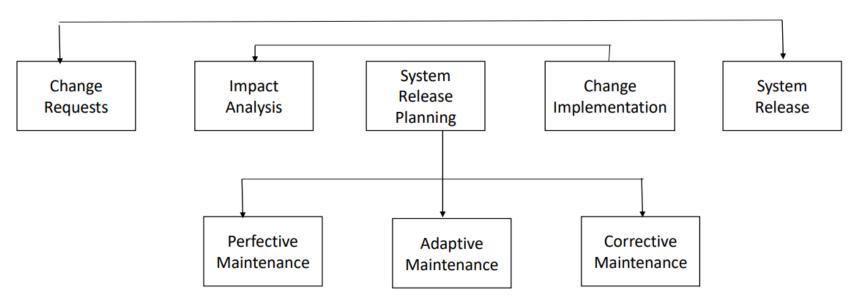






- We can perform several types of maintenance on an information system. By maintenance, we mean the fixing or enhancing of an information system.
- **1. Corrective Maintenance:** It refers to changes made to repair defects in the design, coding, or implementation of the system. This type of maintenance implies removing errors in a program, which might have crept in the system due to faulty design or wrong assumptions. Thus, in corrective maintenance, processing or performance failures are repaired.
- For example: If you had recently purchased a new home, corrective
 maintenance would involve repairs made to things that had never worked as
 designed, such as a faulty electrical outlet or a misaligned door. Most corrective
 maintenance problems surface soon after installation. When corrective
 maintenance problems surface, they are typically urgent and need to be resolved
 to curtail/reduce possible interruptions in normal business activities.



- 2. Adaptive Maintenance: In adaptive maintenance, program functions are changed to enable the information system to satisfy the information needs of the user. It involves making changes to an information system to evolve its functionality to changing business needs or to migrate it to a different operating environment. Within a home, adaptive maintenance might be adding storm windows to improve the cooling performance of an air conditioner.
- Adaptive maintenance is usually less urgent than corrective maintenance because business and technical changes typically occur over some period of time.
- This type of maintenance may become necessary because of organizational changes which may include:
 - a. Change in the organizational procedures
 - b. Change in organizational objectives, goals, policies etc.
 - c. Change in forms,
 - d. Change in information needs of managers.



- 3. Perfective Maintenance: Perfective maintenance means adding new programs or modifying the existing programs to enhance the performance of the information system. This type of maintenance undertaken to respond to user's additional needs which may be due to the changes within or outside of the organization. Outside changes are primarily environmental changes, which may in the absence of system maintenance, render the information system ineffective and inefficient. These environmental changes include:
- a) Changes in governmental policies, laws, etc.
- b) Economic and competitive conditions and
- c) New technology.
- It involves making enhancements to improve processing performance or interface usability or to add desired, but not necessarily required, system features ("bells and whistles"). In our home example, perfective maintenance would be adding a new room. Many systems professionals feel that perfective maintenance is not really maintenance but rather new development.



- 4. Preventive Maintenance: Preventive changes refer to changes made to increase the understanding and maintainability of your software in the long run. Preventive changes are focused in decreasing the deteriorating of your software in the long run.
- Restructuring, optimizing code and updating documentation are common preventive changes. Executing preventive changes reduces the amount of unpredictable efforts software can have in the long term and helps it become scalable, stable, understandable and maintainable.
- It involves changes made to a system to reduce the chance of future system failure.
- An example of preventive maintenance might be to increase the number of records that a
 system can process far beyond what is currently needed or to generalize how a system sends
 report information to a printer so that the system can easily adapt to changes in printer
 technology. In our home example, preventive maintenance could be painting the exterior to
 better protect the home from severe weather conditions. As with adaptive maintenance,
 both perfective and preventive maintenance are typically a much lower priority than
 corrective maintenance.



The Cost of Maintenance

- The cost of maintenance represent a large proportion of the budget of most organization that use the software system. For some organizations, as much as 60 to 80 percent of their information systems budget is allocated to maintenance activities. These huge maintenance costs are due to the fact that many organizations have accumulated more and more older legacy systems that require more and more maintenance. More maintenance means more maintenance work for programmers. In addition, about one-third of the costs of establishing and keeping a presence on the Web go to programming maintenance.
- Maintenance cost as a proportion cost of development costs vary from one application domain to another. For business application system, maintenance cost were broadly comparable with system development cost. For embedded real time systems, maintenance cost may be up to four times higher than development cost.
- So while developing system, good software engineering techniques such as precise specification, use of object oriented development and configuration management are used that contribute to maintenance cost reduction.



Factors Influencing Maintenance Cost

- Numerous factors influence the maintainability of a system. These factors, or cost elements, determine the extent to which a system has high or low maintain-ability. Of these factors, three are most significant: the number of latent defects, the number of customers, and documentation quality. The others personnel, tools, and software structure have noticeable but less, influence.
- Latent defects: This is the number of unknown errors existing in the system after it is installed. Because corrective maintenance accounts for most maintenance activity, the number of latent defects in a system influences most of the costs associated with maintaining a system.
- **Number of customers for a given system:** In general, the greater the number of customers, the greater the maintenance costs. For example, if a system has only one customer, problem and change requests will come from only one source. Also, training, error reporting, and support will be simpler. Maintenance requests are less likely to be contradictory or incompatible.
- Quality of system documentation: Without quality documentation, maintenance efforts can increase
 exponentially. High-quality documentation leads reduction in the system maintenance effort when
 compared with average-quality documentation. In other words, quality documentation makes it easier to
 find code that needs to be changed and to understand how the code needs to be changed. Good
 documentation also explains why a system does what it does and why alternatives were not feasible,
 which saves wasted maintenance efforts.



Factors Influencing Maintenance Cost

- - Maintenance personnel: In some organizations, the best programmers are
 assigned to maintenance. Highly skilled programmers are needed because the
 maintenance programmer is typically not the original programmer and must
 quickly understand and carefully change the software.
- Tools: Tools that can automatically produce system documentation where none
 exists can also lower maintenance costs. Also, tools that can automatically
 generate new code base on system specification changes can dramatically reduce
 maintenance time an costs.
- Well-structured programs: Well-designed system are easier to understand and fix.




Managing Maintenance

 As maintenance activities consume more and more of the systems development budget, maintenance management has become increasingly important. Today, far more programmers worldwide are working on maintenance than on new development. In other words, maintenance is the largest segment of programming personnel, and this implies the need for careful management. We will address this concern by discussing several topics related to the effective management of system maintenance



Managing Maintenance Peronnel

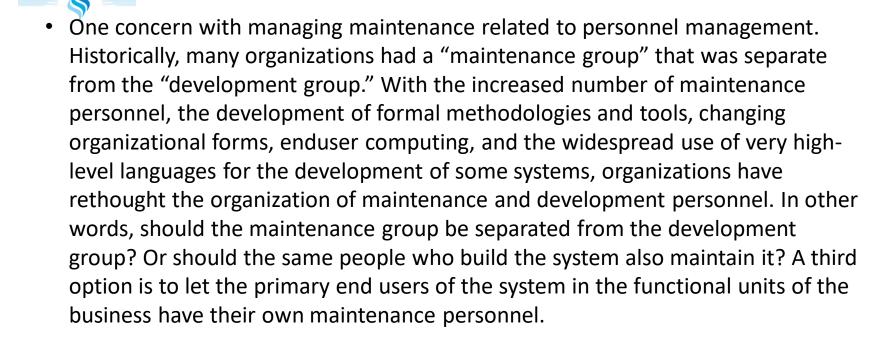



Measurin Maintenance Effetiveness

- A second management issue is the measurement of maintenance effectiveness. As with the
 effective management of personnel, the measurement of maintenance activities is
 fundamental to understanding the quality of the development efforts. To measure
 effectiveness, you must measure the following factors:
- Number of failures
- Time between each failure
- Type of failure
- Measuring the number of failures and time between failures will provide you with the basis to calculate a widely used measure of system quality. This metric is referred to as the Mean Time Between Failures (MTBF).
- The MTBF metric shows the average length of time between the identification of one system failure and the next. Over time, you should expect the MTBF value to rapidly increase after a few months of use (and corrective maintenance) of the system. Tracking the types of failures also provides important management information for future projects.



Measurin Maintenance Effetiveness

- For e
 - For example, if a higher frequency of errors occurs when a particular development environment is used, such information can help guide personnel assignments; training courses; or the avoidance of a particular package, language, or environment during future development.
- The primary lesson here is that without measuring and tracking maintenance activities, you cannot gain the knowledge to improve or know how well you are doing relative to the past. To effectively manage and to continuously improve, you must measure and assess performance over time.



Controlling Maintenance Requests

- Another maintenance activity is managing maintenance requests. There are various types of
 maintenance requests some correct minor or severe defects in the systems, whereas
 others improve or extend system functionality. From a management perspective, a key issue
 is deciding which requests to perform and which to ignore. Because some requests will be
 more critical than others, some methods of prioritizing requests must be determined.
- **Configuration Management:** An aspect of managing maintenance is configuration management, which is the process of ensuring that only authorized changes are made to a system.
- **Configuration Management (CM)** is a systems engineering process for establishing and maintaining consistency of a product's performance, functional, and physical attributes with its requirements, design, and operational information throughout its life.
- A configuration management (CM) is used to keep track of an organization's hardware, software and related information. This includes software versions and updates installed on the organization's computer system.
- • CM also involves logging the network addresses belonging to the hardware devices used.



Controlling Maintenance Requests

- Software is available for all of these tracking tasks. Once a system has been implemented and installed, the programming code used to construct the system represents the baseline modules of the system.
- The baseline modules are the software modules for the most recent version of a system whereby each module has passed the organization's quality assurance process and documentation standards.
- A system librarian controls the checking out and checking in of the baseline source code modules. If maintenance personnel are assigned to make changes to a system, they must first check out a copy of the baseline system modules no one is allowed to directly modify the baseline modules.
- Only these modules that have been tested and have gone through a formal check-in process can reside in the library.
- Before any code can be checked back in to the librarian, the code must pass the quality control procedures, testing, and documentation standards established by the organization.



Controlling Maintenance Requests

- When various maintenance personnel working on different maintenance tasks complete each task, the librarian notifies those still working that updates have been made to the baseline modules. This means that all tasks being worked on must now incorporate the latest baseline modules before being approved for check-in. Following a formal process of checking modules become out and in, a system librarian helps to ensure that only tested and approved modules become part of the baseline system.
- It is also the responsibility of the librarian to keep copies of all prior versions of all system modules, including the build routines needed to construct any version of the system that has even existed. It may be important to reconstruct old versions of the system if new ones fail or to support users that cannot run newer versions on their computer system.
- Special software systems have been created to manage system configuration and version control activities. This software is becoming increasingly necessary as the change control process becomes ever more complicated in organizations deploying several different networks, operating systems, languages, and database management systems in which there may be many concurrent versions of an application, each for a different platform.
- One function of this software is to control access to modules in the system library. Each time a module is checked out or in, this activity is recorded, after being authorized.

Role of CASE in Maintenance

- In traditional systems development, much of the time is spent on coding and testing. When software changes are approved, code is first changed and then tested. Once the functionality of the code is assured, the documentation and specification documents are updated to reflect system changes. Over time, the process of keeping all system documentation "current" can be a very boring and time-consuming activity that is often neglected. This neglect makes future maintenance by the same or different programmers difficult at best.
- A primary objective of using automated tools for systems development and maintenance is to radically change the way in which code and documentations are modified and updated. When using an integrated development environment, analysts maintain design documents such as data flow diagrams and screen designs, not source code.
- One of the biggest advantages to using automated tools, for example, is its usefulness in system maintenance.
- Two special purpose tools, reverse engineering and reengineering tools, are used to maintain older systems that have complete documentation. These tools are often referred to as design recovery tools because their primary benefit is to create high level design
 Toomments of a program by reading and analyzing its source code.

Role of CASE in Maintenance



- Reverse engineering tools are those that can create a representation of a system or program
 module at a design level of abstraction. For example, reverse engineering tools read
 program source code as input; perform an analysis; and extract information such as program
 control structures, data structures, and data flow.
- Once a program is represented at a design level using both graphical and textual representations, the design can be more effectively restructured to current business needs or programming practices by an analysts. For example, Microsoft's Visual Studio.NET can be used to reverse engineer applications into UML (Unified Modeling Language) or other development programs.
- Similarly, reengineering tools extend reverse engineering tools by automatically (or interactively with a systems analyst) altering an existing system in an effort to improve its quality or performance. As reserve and reengineering capabilities are included in more popular development environments, the ability to extend the life and evolve the capabilities of existing systems will be enhanced.



