HDOC Day-75 (13-Nov-26)

Name: Dhruv Pandey **SAP ID: 590037660** **Batch: 15**

13 Nov 2026 | Enumeration in C

1. Assign explicit values starting from 10 in an enumeration and print them.

Input: Nil **Expected Output:** A=10, B=11, C=12

```
#include <stdio.h>

enum Values {
    A = 10,
    B,
    C
};

int main()
{
    printf("A=%d, B=%d, C=%d\n", A, B, C);
    return 0;
}
```

Output

```
A=10, B=11, C=12
```

Since **A** is explicitly assigned 10, the next enumeration constants automatically become B=11 and C=12.

2. Use enumeration to represent menu choices and perform operations using switch.

Operations: ADD, SUBTRACT, MULTIPLY

Sample Input: ADD 10 20 **Expected Output:** 30

```
#include <stdio.h>
#include <string.h>

enum Operation {
    ADD,
    SUBTRACT,
    MULTIPLY
};

int main()
{
    char choice[20];
    int a, b;
    enum Operation op;

    scanf("%s %d %d", choice, &a, &b);

    if (strcmp(choice, "ADD") == 0)
        op = ADD;
    else if (strcmp(choice, "SUBTRACT") == 0)
        op = SUBTRACT;
    else if (strcmp(choice, "MULTIPLY") == 0)
        op = MULTIPLY;
    else {
        printf("Invalid operation");
        return 0;
```

```
    }

    switch (op)
    {
        case ADD:
            printf("%d\n", a + b);
            break;
        case SUBTRACT:
            printf("%d\n", a - b);
            break;
        case MULTIPLY:
            printf("%d\n", a * b);
            break;
    }

    return 0;
}
```

Sample Input

```
ADD 10 20
```


Sample Output

```
30
```

The input word is converted to an enumeration value, and the **switch** statement performs the corresponding arithmetic operation.

HDOC Day-75 - Execution Screenshots

Program 1 - Compilation and Output

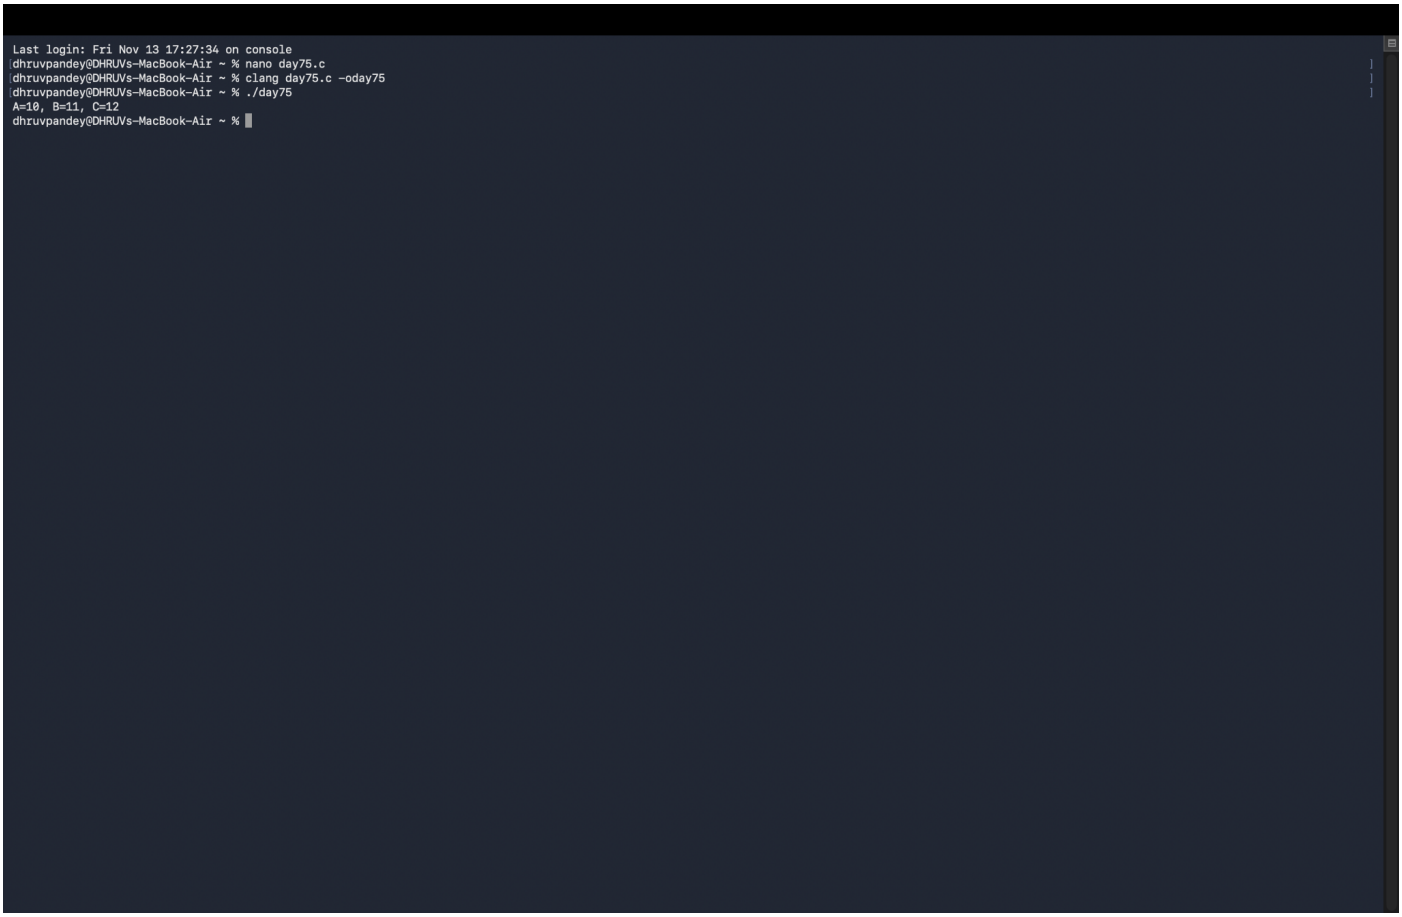

Program 2 - Compilation and Output

