HDOC Day-74 Activity

Batches 15 & 16

Name	Dhruv Pandey
SAP ID	_____

Program 1: Enumeration for Months

Input: FEB **Output:** 28 or 29 days

```
#include <stdio.h>

enum Month {
    JAN, FEB, MAR, APR, MAY, JUN,
    JUL, AUG, SEP, OCT, NOV, DEC
};


int main()
{
    enum Month month = FEB;

    switch (month)
    {
        case JAN: case MAR: case MAY: case JUL:
        case AUG: case OCT: case DEC:
            printf("31 days\n");
            break;

        case APR: case JUN: case SEP: case NOV:
            printf("30 days\n");
            break;

        case FEB:
            printf("28 or 29 days\n");
            break;
    }
    return 0;
}
```

Program 1 - Terminal Execution

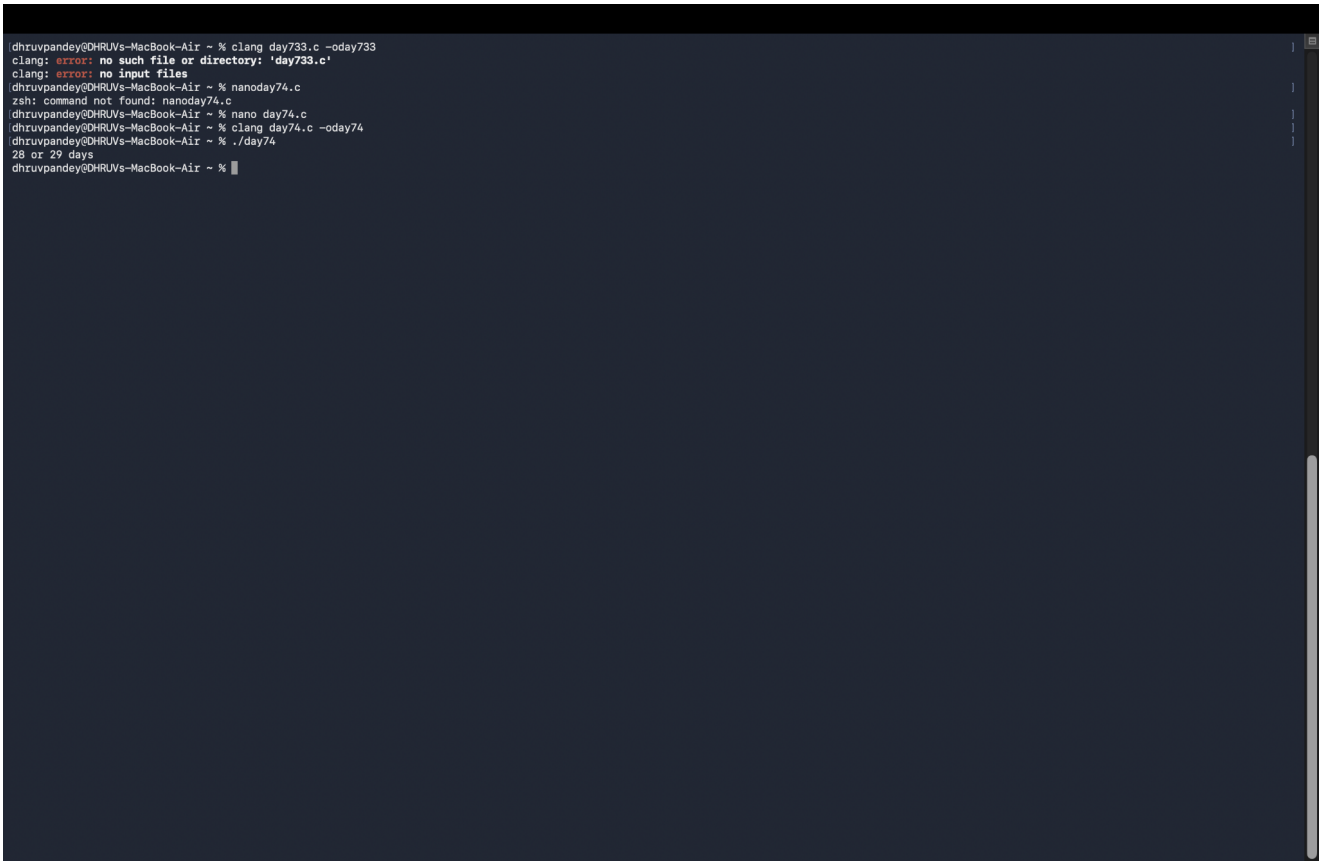

The terminal output shows: **28 or 29 days**.

Program 2: Enumeration for Operation Status

Input: FAILURE **Output:** Operation Failed


```
#include <stdio.h>

enum Status {
    SUCCESS,
    FAILURE,
    TIMEOUT
};

int main()
{
    enum Status status = FAILURE;

    switch (status)
    {
        case SUCCESS:
            printf("Operation Successful\n");
            break;
        case FAILURE:
            printf("Operation Failed\n");
            break;
        case TIMEOUT:
            printf("Operation Timed Out\n");
            break;
    }
    return 0;
}
```

Program 2 - Terminal Execution

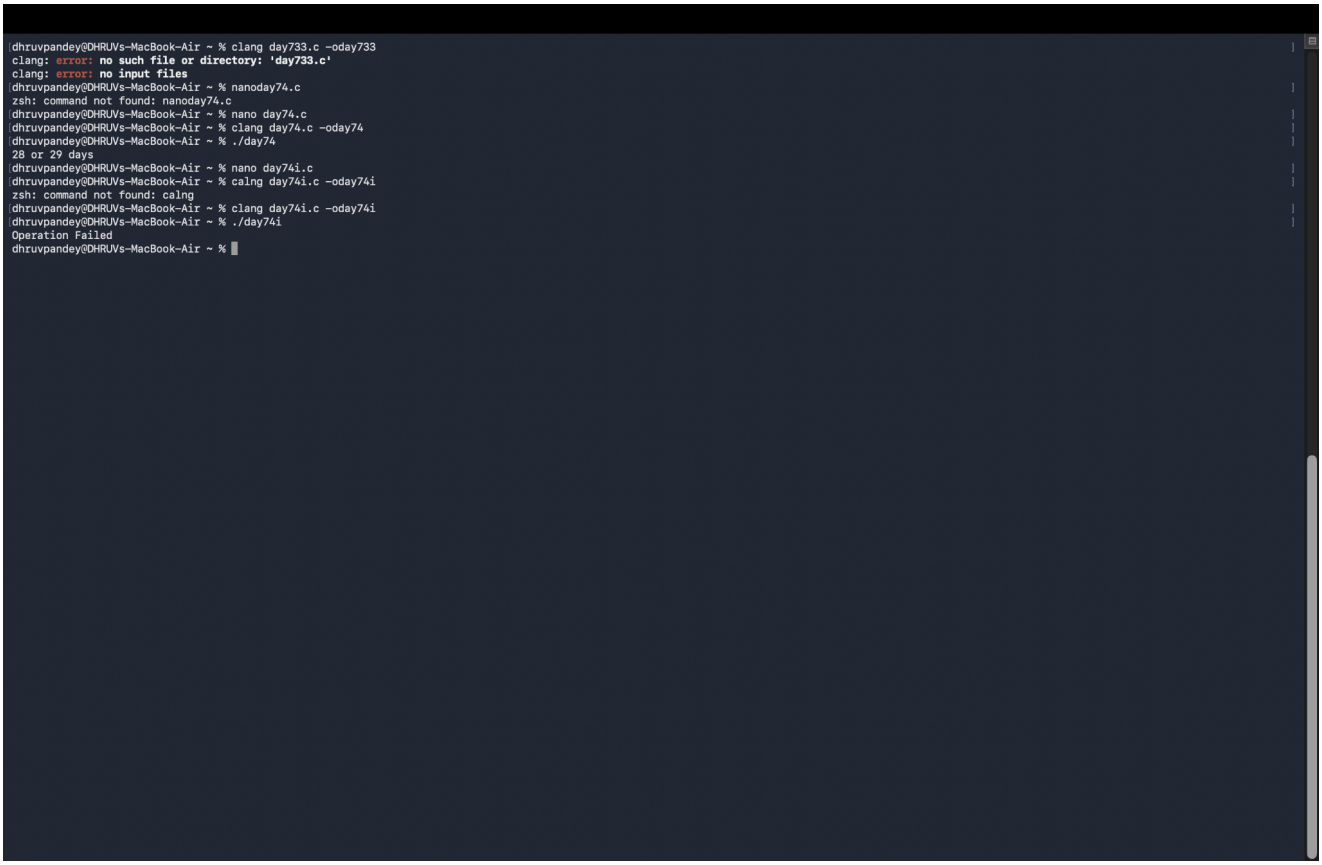

The terminal output shows: **Operation Failed**.

Concept Used

Enumeration (enum) gives meaningful names to integer constants. Here, enum values are used with a **switch statement** to select the required result.