HDOC Day-73 Activity

Batches 15 & 16

Name	Dhruv Pandey
SAP ID	_____

1. Enumeration for Days

Create an enumeration for days (SUNDAY to SATURDAY) and print each day with its integer value.

Input: No Input

```
#include <stdio.h>

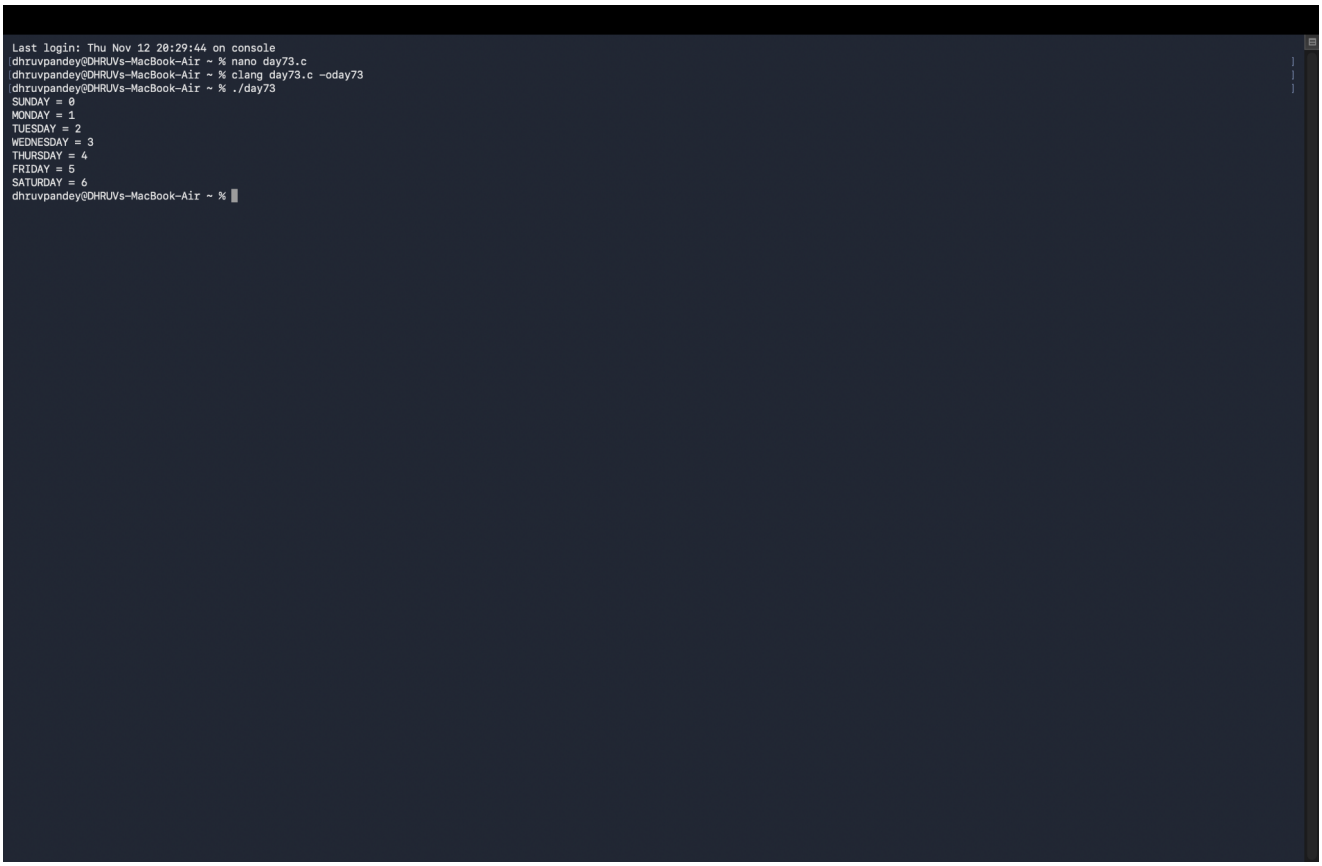
enum Day {
    SUNDAY,
    MONDAY,
    TUESDAY,
    WEDNESDAY,
    THURSDAY,
    FRIDAY,
    SATURDAY
};

int main()
{
    printf("SUNDAY = %d\n", SUNDAY);
    printf("MONDAY = %d\n", MONDAY);
    printf("TUESDAY = %d\n", TUESDAY);
    printf("WEDNESDAY = %d\n", WEDNESDAY);
    printf("THURSDAY = %d\n", THURSDAY);
    printf("FRIDAY = %d\n", FRIDAY);
    printf("SATURDAY = %d\n", SATURDAY);
    return 0;
}
```

Output:

```
SUNDAY = 0
MONDAY = 1
TUESDAY = 2
WEDNESDAY = 3
THURSDAY = 4
FRIDAY = 5
SATURDAY = 6
```

Execution Screenshot - Program 1


Last login: Thu Nov 12 20:29:44 on console
dhruvpandey@DHRUVs-MacBook-Air ~ % nano day73.c
dhruvpandey@DHRUVs-MacBook-Air ~ % clang day73.c -oday73
dhruvpandey@DHRUVs-MacBook-Air ~ % ./day73
SUNDAY = 0
MONDAY = 1
TUESDAY = 2
WEDNESDAY = 3
THURSDAY = 4
FRIDAY = 5
SATURDAY = 6
dhruvpandey@DHRUVs-MacBook-Air ~ %

2. Enumeration for Traffic Lights

Define an enumeration for traffic lights (RED, YELLOW, GREEN) and print 'Stop', 'Wait', or 'Go' based on its value.

Input: GREEN

```
#include <stdio.h>

enum TrafficLight {
    RED,
    YELLOW,
    GREEN
};

int main()
{
    enum TrafficLight light = GREEN;

    if (light == RED)
        printf("Stop\n");
    else if (light == YELLOW)
        printf("Wait\n");
    else if (light == GREEN)
        printf("Go\n");

    return 0;
}
```

Output:

```
Go
```

Concept: Enumeration (enum)

Enumeration is a user-defined data type in C that gives meaningful names to integer constants. By default, the first name gets value 0, the next gets 1, and so on.