

Confined Space Safety Standard

CLEVELAND-CLIFFS STEEL
Confined Space Safety Standard

Effective Date:	<u>11-3-2023</u>	Supersedes:	<u>All Previous Versions</u>
		Standard No.:	<u>CCS HSS STD 004.2</u>
		Follow-Up Review Date:	<u>11-3-2024</u>

1	Purpose/Scope.....	2
2	Responsibilities and Authorities.....	3
3	References and Definitions.....	4
4	Resources.....	9
5	Requirements.....	10
6	Forms and Documented Information.....	21
7	Opportunities and Risks.....	21
8	Revision History.....	22

1 Purpose/Scope

- 1.1 This Standard has been authorized and approved to establish the general procedures necessary to eliminate, control, prevent unauthorized access to, or mitigate the safety and health hazards unique to confined spaces. It is based on developing specific procedures for each space.
- 1.2 This Confined Space Standard applies to Cleveland-Cliffs Steel personnel and to all contractors who may enter a confined space on Cleveland-Cliffs Steel properties.
- 1.3 The Take 5 process is an important part of all tasks we perform and whenever possible we shall use this process to minimize the need to enter a confined space.

2 Responsibilities and Authorities

- 2.1 This standard was jointly developed with participation from the represented workforce and management.



- 2.2 Each *facility's* management is responsible for the implementation of this standard.

- 2.3 The Senior Director of Health, Safety and Security is responsible for authorizing this standard.

- 2.4 Confined Space Entry Procedures must be reviewed and revised as necessary. This must be done:

- 2.4.1 Annually or before the next entry.
- 2.4.2 Following any unplanned event.
- 2.4.3 After any change which may affect the entry.

- 2.5 It is the responsibility of the department "owning" or controlling the confined space to maintain the Confined Space Entry Procedure, keep canceled permits and keep contractor notification and debriefing records for at least one year.

- 2.6 The Confined Space Entry Program and entry procedures are subject to annual review and periodic audit to ensure proper program direction and execution.

- 2.7 Each closed permit will be reviewed by the department and filed in a way that allows review for a period of 1 year.

- 2.7.1 Each department must review their program annually.

3 References and Definitions

3.1 References

- 29 CFR 1910.146
- 29 CFR 1926.1200
- MIOSHA-STD-1160

3.2 Definitions

Attendant: An individual stationed outside a confined space who monitors the authorized entrants and performs all the attendant's duties assigned in the confined space program. The Attendant will be assigned no other duties that prevent the accomplishment of the duties required.

Acceptable Entry Conditions: The conditions that must exist in a permit space to allow entry and to ensure that employees involved with a permit-required confined space entry can safely enter and work within the space.



Alternate Entry Procedures: Procedures that may be used when the only hazard of a confined space, based upon monitoring and inspection data, is an actual or potential hazardous atmosphere in which continuous forced air ventilation alone is all that is needed to maintain the **Permit Required Confined Space** for safe entry.

Authorized Entrant: An employee who is authorized by the employer to enter a permit required confined space.

Blanking or Blinding: The absolute closure of a pipe, line, or duct by the fastening of a solid plate (such as a spectacle blind or a skillet blind) that completely covers the bore and that can withstand the maximum pressure of the pipe, line or duct with no leakage beyond the plate.

Competent Person: One who can identify existing and predictable hazards in the surroundings or working conditions which are unsanitary, hazardous, or dangerous to employees, and who has the authorization to take prompt corrective measures to eliminate them.

Confined Space Safety Standard

Confined Space: A space that:

- Is large enough and so configured that an employee can bodily enter and perform assigned work.
- Has limited or restricted means for entry or exit (for example, tanks, vessels, storage bins, hoppers, vaults, pits, ladles, and sewers that may have limited means of entry).
- Is not designed for continuous occupancy.

Double Block and Bleed: The closure of a line, duct, or pipe by closing and locking two in-line valves, and by opening and locking a drain or vent valve in the line between the two closed valves.

Emergency: Any occurrence (including any failure of hazard control or monitoring equipment) or event(s), internal or external, to the confined space that could endanger entrants.

Engulfment: The surrounding and effective capture of a person by a liquid or finely divided (flowable) solid substance that can be aspirated to cause death by filling or plugging the respiratory system, or that can exert enough force on the body to cause death by strangulation, constriction or crushing.

Entrant: An employee authorized by the entry supervisor to enter a confined space.

Entrapment: The capture and potential asphyxiation of a person by being trapped in a confined space.

- With inwardly converging walls.
- A floor which slopes downward or tapers to a smaller cross section.

Entry: The action by which a person passes through an opening into a confined space. Entry includes ensuing work activities in that space and is considered to have occurred as soon as any part of the entrant's body breaks the plane of an opening into the space.

Entry Supervisor: The person responsible for determining if acceptable entry conditions are present at a permit space where entry is planned, for authorizing entry and overseeing entry operations, and for terminating entry.

Entry Permit System: The employer's written procedures for preparing and issuing permits for entry and returning the permit space to service following termination of entry and designates by name or title the individuals who may authorize entry.

Confined Space Safety Standard

Entry Permit: The written or printed document that is provided by the employer to allow and control entry into a permit space, and contains the information specified in section 5 of this document.

Hazardous Atmosphere: An atmosphere that may expose employees to the risk of death, incapacitation, and impairment of ability to self-rescue (that is, escape unaided from a permit space), injury or acute illness from one or more of the following causes:

- Flammable gas, vapor, or mist more than 10 percent of its lower flammable limit (LFL).
- Airborne combustible dust at a concentration that meets or exceeds its LFL (dust obscuring vision at 5 feet).
- Atmospheric Oxygen concentration below 19.5 percent or above 23.5 percent.
- The presence of any substance whose concentration exceeds a recognized permissible exposure limit or dose. For those substances that have no permissible exposure level or dose, refer to other recognized data such as safety data sheets, manufacturers' data, and lab analysis for determining acceptable conditions.
- Atmospheric concentration of any substance which may exceed a permissible exposure limit.
- Any other atmospheric condition that is immediately dangerous to life or health.

Hot Work Permit: The employer's written authorization to perform operations (for example, riveting, welding, cutting, burning, and heating) capable of providing a source of ignition.

Immediately Dangerous to Life or Health (IDLH): Any condition that poses an immediate or delayed threat to life, or that would cause irreversible adverse health effects, or that would interfere with an individual's ability to escape unaided from a permit space.

Inerting: The displacement of the atmosphere in a permit space by a noncombustible gas (such as nitrogen) to such an extent that the resulting atmosphere is noncombustible.

Isolation: The process by which a permit space is removed from service and completely protected against the release of energy and material into the space by such means as: blanking or blinding; misaligning or removing sections of lines, pipes or ducts; a double block and bleed system; lockout of all sources of energy; or blocking or disconnecting all mechanical linkages.

Confined Space Safety Standard

Line Breaking: The intentional opening of a pipe, line or duct that is or has been carrying flammable, corrosive or toxic material, an inert gas, or any fluid at a volume, pressure, or temperature capable of causing injury.

Non-Permit Confined Space: A confined space that does not contain, or with respect to atmospheric hazards, have the potential to contain any hazard capable of causing death or serious physical harm.

Oxygen Deficient Atmosphere: An atmosphere containing less than 19.5 percent oxygen by volume.

Oxygen Enriched Atmosphere: An atmosphere containing more than 23.5 percent oxygen by volume.

Permit Required Confined Space: Means a confined space that has one or more of the following characteristics:

- Contains or has *the* potential to contain a hazardous atmosphere.
- Contains material that has the potential for engulfment of an entrant.
- Has an internal configuration such that an entrant could be trapped or asphyxiated by inwardly converging walls, or a floor which slopes downward and tapers to a smaller cross-section or;
- Contains any other recognized serious safety or health hazard.

PEL (Permission Exposure Limit): Average concentration that must not be exceeded during an 8-hour work shift of a 40-hour work week.

Permit System: The employer's written procedure for preparing and issuing permits for entry, and for returning the permit space to service following termination of entry.

Permit Required Confined Space Program: The employer's overall program for controlling, and where appropriate, for protecting employees from permit space hazards and for regulating employee entry into permit spaces.

Prohibited Condition: Any condition in a permit space that is not allowed by the permit during the period when entry is authorized.

Qualified Person: One who, by possession of a recognized degree, certificate, or professional standing, or who by extensive knowledge, training, and experience, has successfully demonstrated his ability to solve or resolve problems relating to the subject matter, the work or the project.

Confined Space Safety Standard

Retrieval System: The equipment (including a retrieval line, full body harness, wristlets, if appropriate, and a lifting device or anchor) used for non-entry rescue of persons from the permit space.

Representative Permit Space: A mock-up of a confined space that has entrance openings that are similar to, and is of similar size, configuration, and accessibility to the permit space that authorized entrants enter.


Rescue Service: The personnel designated to rescue employees from permit spaces.

- Rescue services need to be qualified and selected to perform rescue services.
- Cleveland-Cliffs Steel Safety will determine what contractors are qualified to perform rescue services.

Testing: The process by which the hazards that may confront entrants of a permit space are identified and evaluated. Testing includes specifying the tests that are to be performed in the permit space. Testing enables employers both to devise and implement adequate control measures for the protection of authorized entrants and to determine if acceptable entry conditions are present immediately prior to, and during entry.

4 Resources

4.1 Decision Flowchart

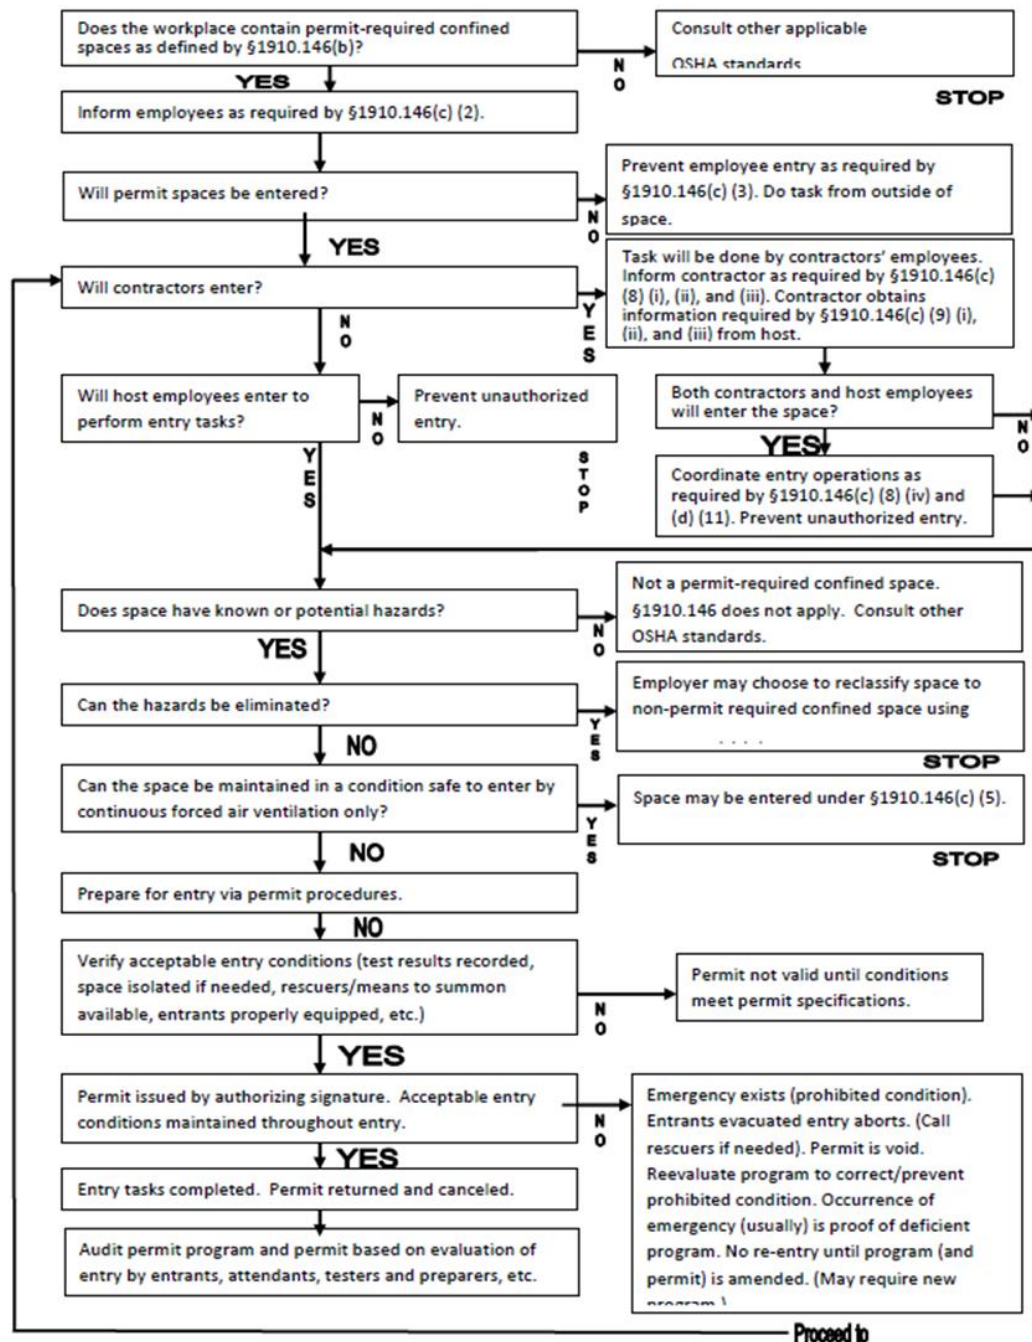

5 Requirements

5.1 General Responsibilities

5.1.1 Divisions/Departments are responsible for:

- a. Identifying all confined spaces in their areas.
- b. Identifying and post signage and maintain signage at all confined spaces.
- c. Maintain an inventory of all confined spaces.
- d. Ensuring all personnel who enter confined spaces are trained.
- e. Implementing this confined space entry program.
- f. Performing confined space hazard assessments.
- g. Developing space specific entry procedure.
- h. Ensure all spaces are maintained closed to prevent unauthorized access.
- i. Maintain the space so that a tool or the removal of latches or similar methods is needed to gain entry.
- j. Ensuring that contractor requirements of this program are implemented.
- k. Ensuring that all contractors who may enter a confined space are made aware of this program.

5.1.2 Health and Safety Department is responsible for:

- a. Assisting departments in identifying confined spaces.
- b. Assisting departments in completion of required training.
- c. Assisting departments with confined space assessments.
- d. Assisting departments in monitoring people working in confined spaces.
- e. Auditing the program.

Confined Space Safety Standard

5.1.3 Contractors are responsible for:

- a. Adopting the Cleveland-Cliffs confined space program or implementing one that meets or exceeds the Cleveland-Cliffs program.
- b. Training their employees.
- c. Supplying their own safety and monitoring equipment.
- d. Maintaining the permit used for entry.

5.1.4 Entry Alternatives

- a. When work is assigned, the crew should utilize the Take 5 process to identify if entry into the space will be required.
- b. Whenever feasible, design changes or work practice will be developed to eliminate the need for entry into confined spaces.
- c. Non-entry work practices will be covered by a JSA or equivalent methods of standardized work instruction.

5.2 Confined Space

5.2.1 For Cleveland-Cliffs, all locations that meet all the following criteria are to be considered as a CONFINED SPACE:

- a. Is large enough and so configured that an employee can bodily enter and perform assigned work and,
- b. Has limited or restricted means for entry or exit (for example, tanks, vessels, storage bins, hoppers, vaults, pits, sewers and roll off containers that may have limited means of entry),
- c. Is not designed for continuous occupancy.

5.2.2 Permit Required Confined spaces contain at least one of the following:

- a. Contains, or has the potential to contain, a hazardous atmosphere.
- b. Contains, or has the potential to contain, flowable material that could engulf.
- c. Has an internal configuration such that one could be trapped or asphyxiated by an inwardly converging wall or by a floor which slopes downward and tapers to a small cross section.
- d. Contains any other recognized serious safety or health hazard. (An example of this situation would be exposed, uninsulated electrical wiring.)

Confined Space Safety Standard

- 5.2.3 Cleveland-Cliffs requires all confined space *entry* to utilize an entry permit and be attended as if it were a permitted space. Spaces that meet the definition of a Permit Required space also require rescue services.

5.3 Confined Space Inventory

- 5.3.1 A complete inventory of all known confined spaces within a department will be made and reviewed annually. Additional spaces will be included upon discovery. It is the responsibility of the department to generate this inventory and keep it current.
- 5.3.2 This inventory shall be reviewed annually or more frequently as necessary to maintain an accurate inventory.
- 5.3.3 Made accessible to all employees as needed.
- 5.3.4 The inventory will uniquely identify each space.
 - a. Department, Unique number, Common Name.

Example: Rolling Mill (Space) 29 Pit pumps (RM-29- Pit Pumps)

5.4 Posting

- 5.4.1 All Employees must be alerted to the presence of the confined space.
- 5.4.2 Appropriate actions must be taken to prevent unauthorized entry.
- 5.4.3 All accessible entrances to inventoried confined spaces shall be posted near the entrance with the following:

DANGER: CONFINED SPACE AUTHORIZED ENTRY ONLY

(or similar language to identify spaces at each facility in a consistent manner.)
- 5.4.4 All spaces including manholes in roadways will be uniquely identified.
- 5.4.5 A unique identifier will be posted at each space near the point of entry.
- 5.4.6 If you discover an area that might be a confined space and it is not marked as such, notify your supervisor.

5.5 Entry Procedures

- 5.5.1 Safe entry procedures for confined spaces must be developed and written in a standard step-by-step format.

Confined Space Safety Standard

5.5.2 These step-by-step procedures must be created with enough detail and supporting documentation, such as pictures and diagrams, that a person preparing to enter a confined space can verify that the actions required, and conditions specified do exist and that the actions required have been met.

5.5.3 It is the responsibility of the department controlling the confined space to create, maintain, review, revise and approve the entry procedure.



5.5.4 Approval of new and revised entry procedures must be approved by the Operating Department Division Manager or Section Manager, Maintenance Section Manager, ~~and the Safety Department.~~

- a. Confined spaces entered at least once a year must have specific entry procedures, pre-planned and in writing. Whenever possible these must be created in advance of any entry to allow thorough review by operations, maintenance, safety, and entry groups.
- b. Spaces entered less frequently than once per year shall have their procedures developed prior to entry as soon as the need to enter the space is recognized.

5.5.5 Current copies of any referenced documents must be attached to the Confined Space Permit at the time of use.

- a. Includes SDS for materials that may already be present in the space, and for materials that entrants might introduce into the space. SDS (Safety Data Sheet) information must be reviewed to assure all hazards are eliminated or controlled.
- b. Includes energy control procedures.
- c. Includes hot work permits if necessary.
- d. For contractors includes Joint Job Hazard Assessment and Controls form

5.6 Confined Space Permit

5.6.1 Confined Space Permit is to be used as written documentation to assure that all hazards or potential hazards are dealt with appropriately.

5.6.2 The Confined Space Permit is the working document completed to gain and maintain an entry into a space.

5.6.3 Until the Confined Space Permit is completed, the Confined Space shall be considered to contain a hazard.

Confined Space Safety Standard

- 5.6.4 Confined Space Entry Permits do not include or take the place of hot work permits.
- 5.6.5 The Confined Space Entry Permit must contain the following information:
- a. The date and *time* of entry.
 - b. *The expiration time of the entry.*
 - c. The *name and* location of the permit space.
 - d. The purpose of the entry.
 - e. The hazards of the permit space to be entered and the acceptable entry conditions.
 - f. The identity of each authorized entrant, each attendant, and the entry supervisor.
 - g. The measures to be taken to isolate the permit space and to eliminate or control permit space hazards before entry.
 - h. The results of initial and periodic tests performed with the identity of testers.
 - i. The name and telephone numbers of rescue and emergency services and means to be used to contact them.
 - j. The additional permits, such as for hot work, have been issued authorizing work in the permit space.
 - k. Special equipment and procedures, including PPE (Personal Protective Equipment) and alarm systems.
- 5.6.6 Confined space permits will expire after 12 hours and must be re-issued.

5.7 Attendant

- 5.7.1 An attendant is required for any entry into any confined space.
- 5.7.2 Under no circumstances will the confined space Attendant enter the confined space.

5.8 Entry Supervisor

- 5.8.1 An entry supervisor is required for every confined space.

Confined Space Safety Standard

5.9 Rescue

5.9.1 Rescue Standards:

- a. If hazards within a confined space cannot be eliminated, and if rescue cannot be done from outside the space, or the conditions in the space are Immediately Dangerous to Life and Health (IDLH), a rescue team is required.
- b. If rescue is provided by a non-Cleveland-Cliffs source, advanced access to the confined space and training on associated hazards must be provided.
- c. Confined spaces that require rescue teams must have the rescue team and required equipment on-site and within range of the space as pre-determined prior to entry. They must also be in range of the emergency signal or method of summoning the rescue team.
- d. A rescue team may be utilized for more than one space and does not need to be staged at the entry unless the conditions of entry require one to be immediately available.

5.9.2 Rescue from outside the confined space.

- a. If it is determined that rescue can be performed from outside the confined space, the person(s) responsible for rescue must be trained in the following:
- b. Use of the mechanical hoist or other equipment that will be used to retrieve the entrant.
- c. Any hazards that exist outside of the confined space that could interfere with rescue.
- d. The necessary emergency numbers and how to access communications.
- e. Rescue personnel must be provided with quick access to communications equipment so that emergency personnel can be contacted immediately if rescue operations are put into effect.

5.9.3 Non-entry rescue equipment and setup.

- a. Non-Entry Rescue equipment to be used by trained personnel includes items such as but not limited to a tripod, davit arm and horizontal retrieval device with approved retrieval systems.
- b. Full body harnesses are to be worn by all entrants going into a confined space *when needed to facilitate rescue*.



Confined Space Safety Standard

- c. A tripod or similar rescue device will be positioned to the side of vertical confined spaces and checked for stability prior to entry by the attendee and individuals working in the confined space. Once opened, the tripod will be placed over the vertical opening to assure stability and fit for rescue. After checking the tripod, it can be situated to the side of the confined space opening.
- d. All atmospheric testing and ventilation shall be conducted according to the established confined space program and be posted at/or near the opening of the space.
- e. Under no circumstances will a crane or powered hoist be used in a rescue operation.

5.10 Duties of Confined Space Participants

5.10.1 Entry team duties.

5.10.2 Duties of authorized entrants:

- a. Follow entry requirements of the permit.
- b. Know the hazards that may be faced during entry.
- c. Wear full body harness when entering the space when needed to facilitate rescue.
- d. Recognize the signs and symptoms of hazard exposure.
- e. Understand the consequences of hazardous exposure.
- f. Use equipment properly.
- g. Communicate with the attendant.
- h. Alert the attendant of hazards.
- i. Exit the permit space immediately when required.
- j. Wear a personal *Four Gas* monitor.



5.10.3 Duties of the attendant:

- a. Know entry hazards.
- b. Know behavioral effects of exposure to the hazards likely to be present.
- c. Maintain accurate entrant identification.
- d. Maintain accurate records on the confined space permit.

Confined Space Safety Standard



- e. Remain outside the permit space.
- f. *Do not leave the space entry until all Entrants are out of the space or you are relieved by another qualified attendant.*
- g. Communicate with entrants.
- h. Monitor entry activities.
- i. Recording readings of the space as required.
- j. Summon rescue and emergency services.
- k. Prevent unauthorized entry.
- l. Perform non-entry rescue.
- m. Perform no additional duties.
- n. Remain alert and attentive to the space without distraction.

5.10.4 Duties of the Entry Supervisor:

- a. Know the potential hazards during entry and work.
- b. Determine if acceptable entry conditions are present at a permit space where entry is planned.
- c. Terminate entry as required by the standard.
- d. Verify that rescue services are readily available and the means for summoning them are operable.
- e. Remove unauthorized individuals who enter or try to enter the permit space during entry and work.
- f. Determine that entry and work operations remain consistent with entry permit terms and that acceptable entry conditions are maintained.
- g. The entry supervisor authorizing the entry may serve as an attendant for the entry.

5.11 Training

- 5.11.1 Procedures and duties will be reviewed with all affected employees prior to confined space entry.
- 5.11.2 Training will be conducted before the employee is first assigned duties.
- 5.11.3 Before a change in assigned duties.

Confined Space Safety Standard

- 5.11.4 When a change in permit space operations.
- 5.11.5 Where there are deviations from the permit entry space procedures.
- 5.11.6 Where inadequacies in employee knowledge occur.
- 5.11.7 Training in job duties and the proper use of needed equipment, such as air monitoring equipment, will be given and proficiency established prior to entry and or on an annual basis.
- 5.11.8 Anyone who could serve as an attendant *is also* to be trained to use non-entry rescue equipment.
- 5.11.9 If rescue is to be done by a rescue team that will enter the space, they will receive:
 - a. Training as required for equipment such as self-contained breathing apparatus and testing devices.
 - b. Confined space hazard training the same as those entering the space.
 - c. Annual rescue training includes both actual confined spaces and appropriate simulated representative confined spaces.
 - d. Rescue team members will be trained in First aid and Cardiopulmonary Resuscitation (CPR).
 - e. A copy of the training will include the materials and topics covered in the training.
- Δ

5.11.10 *Training must be documented as either initial or refresher and maintained for the period that all other training records are maintained (both immediately accessible or via archives) per each business unit's practice.*

5.12 Permission to Enter

- 5.12.1 No person is allowed to enter a confined space without permission.
- 5.12.2 No person is allowed to enter a confined space without a calibrated, functioning, personal four gas monitor that monitors O₂, LEL, H₂S, CO.
- 5.12.3 Entry means the point at which any part of a person's body breaks the plane into the opening of the space.
- 5.12.4 A copy of the complete Confined Space Permit, with attachments, must be posted or otherwise made highly visible at the entrance to a confined space before permission to enter is given.

Confined Space Safety Standard

- 5.12.5 The Entry supervisor for a confined space must grant permission for entry by verifying required entry conditions and signing the permit.
- 5.12.6 Permission to enter a space can only be given after all aspects of the written entry permit, including attachments, have been met or completed and employees have completed training.

5.13 Canceling an Entry Permit

- 5.13.1 Permission to enter a confined space is canceled when:
 - a. The task for which the permit was issued has been completed.
 - b. A condition not allowed under the permit arises in or near the space. Any such problems or conditions and their resolution will be noted on the entry permit.
 - c. The permit time limit has expired.

5.14 Monitoring



- 5.14.1 ~~The level of air contaminants allowed will be evaluated by the Safety Department. This requirement is removed from the Standard.~~
- 5.14.2 Initial monitoring or atmospheric testing will be performed from outside the confined space prior to entry.
- 5.14.3 Initial Atmospheric Assessment will be completed prior to entry and completed from outside the space.
- 5.14.4 The air monitoring must be representative of the entire confined space including monitoring at the top, middle and bottom of the space to detect any stratification of the gases.
- 5.14.5 When a draw tube is used adequate time must be used at each level to allow the atmosphere to be drawn through the tube and into the monitor.
- 5.14.6 Oxygen (O₂), Lower Explosive Limit (LEL), and Carbon Monoxide (CO) levels and H₂S must be tested in ALL confined space *entries* at Cleveland-Cliffs.
 - a. O₂ (Oxygen) shall be between 19.5% and 23.5%.
 - b. LEL (Lower Explosive Limit) will be less than 5%.
 - c. CO (Carbon Monoxide) will be no greater than 35 PPM.
 - d. H₂S (Hydrogen Sulfide) will be no greater than 10 PPM.

Confined Space Safety Standard

5.14.7 Monitoring must also be performed on any other hazard that may be present in the space.



5.14.8 Examples: *HCN, Temperature, Ammonia, Radiation*

5.14.9 Continuous Monitoring

- a. The attendant shall at intervals of no greater than 15 minutes monitor the space for changes in acceptable conditions.
- b. Communication will be established with each entrant based on the permissions to enter.
- c. Measure the atmosphere using a calibrated 4 gas monitor.
- d. Monitor for other hazards identified within the space.
- e. This will be recorded on the entry permit.

5.14.10 All entry operations shall be prohibited when any atmospheric level exceeds Cleveland-Cliffs requirements (<19.5% Oxygen, >23.5% Oxygen, 5% LEL, 35 PPM Carbon Monoxide, 10 PPM H₂S).

5.14.11 All entry operations shall be ceased when any atmospheric level exceeds Cleveland-Cliffs requirements (<19.5% Oxygen, >23.5% Oxygen, 5% LEL, 35 PPM Carbon Monoxide, 10 PPM H₂S).

5.14.12 Unless an alternative protective measure such as supplied air was determined to be required as a condition of entry.

5.14.13 Under special conditions for entry the conditions that prohibit the continued operation will be specified on the permit.

5.14.14 Results of the monitoring must be immediately provided to each entrant.

5.14.15 Each entrant must be provided *with* the opportunity to observe the pre-entry and any subsequent monitoring of the confined space.

5.15 Contractors

5.15.1 All contractors that take part in any aspect of confined space entry operations must, at a minimum, follow Cleveland-Cliffs Steel Confined Space Entry Procedures. Contractors must follow all Cleveland-Cliffs Steel documentation requirements involving Confined Space Entry Procedures.

Confined Space Safety Standard

- 5.15.2 The Cleveland-Cliffs Steel person responsible for bringing the contractor on site must notify the contractor about hazards of the confined space, Cleveland-Cliffs Steel monitoring requirements and Cleveland-Cliffs Steel Confined Space Entry Procedures. This notification must be documented.
- 5.15.3 The Cleveland-Cliffs Steel person responsible for bringing the contractor on site must ensure that the required debriefing is completed at the conclusion of the confined space entry.
- 5.15.4 Contractors shall provide their own monitors with proper calibration and a current bump test prior to the issue of a confined space permit.

6 Forms and Documented Information

6.1 Attachments / Forms

- 6.1.1 Confined Space Assessment Form Template (CCS-HSS-FRM-012.2)
- 6.1.2 Confined Space Permit Template (CCS-HSS-FRM-011.2)

7 Opportunities and Risks

- 7.1 This Standard is to ensure a consistent approach to confined space programs are used at all Cleveland-Cliffs Steelmaking facilities.

7.2 The Standard addresses:

- 7.2.1 Risk reduction.
- 7.2.2 Improved entry conditions.
- 7.2.3 Achieves desired conditions for entry.
- 7.2.4 Requires continued improvement.

8 Revision History

Rev.	Date	Summary of change	Authorized by
1	9-1-2022	Initial issue	K. D. Berard
2	11-3-2023	Changes are identified with a delta. Δ • Definition of Alternate Entry Procedure clarification that this is a permit required condition. (3.2, page 4) • Removal of Safety Department approval for new or revised procedures. (5.5.4, page 13) • Full Body Harness is required when needed to facilitate rescue. (5.9.3, page 15 and 16) • Training to be documented per local business practices. (5.11.10, page 18) • Requirement for Four Gas monitors specified for Entrants. (5.10.2, page 16) • Specifically state that Attendants cannot leave the space until all Entrants are out, or until relieved. (5.10.3, page 17) • The requirement for the Safety Department to evaluate allowable levels of contaminants was removed from the Standard. (5.14.1, page 19) • Updated examples of other potential hazards that should be monitored if applicable. (5.14.7, page 20)	Nathan Berry