Method	Atlas-DeePC		Select	Contextual
Reference planning	No	Yes	No	No
Coefficient dimension	53	57	200	200
Success rate	90.0%	**94.2%**	83.0%	84.0%
Median error (mm)	**1.81**	1.86	2.95	6.16
90th-percentile (mm)	10.05	**4.61**	29.96	11.66
95th-percentile (mm)	218.27	**13.16**	58.58	13.39
99th-percentile (mm)	299.30	**48.23**	83.48	91.85
Total online computation (ms per step)				
Median	20.01	**19.92**	1330.85	79.77
95th percentile	27.36	**23.15**	3345.22	95.36
99th percentile	53.85	**43.17**	4838.75	111.84

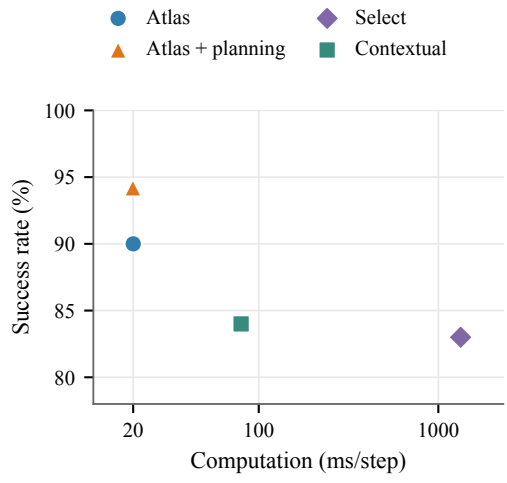


Table 2: Reacher controller comparison on 500 test rollouts (seeds 10001–10500) per configuration, with $T_{\text{sim}} = 300$. Atlas-DeePC uses $p = 8$, with $K = 64$ and $d = 53$ without guidance, and $K = 96$ and $d = 57$ with guidance. Select and Contextual denote Select-DPC and Contextual-DPC, respectively. Contextual-DPC uses the same fixed terminal references as unguided Atlas-DeePC. Error statistics summarize final-100 mean fingertip errors across rollouts; timings pool steps 6–300 and were measured in separate sessions. Select timings include all five refinements. Right: success rate versus median online computation time on a logarithmic horizontal axis; Atlas denotes Atlas-DeePC without planning.