


Practica 7 – Bootstrap


Agregar lo siguiente archivo settings.py

```
132
133     STATIC_DIRS = [
134         os.path.join(BASE_DIR, "static-storage"),
135     ]
136
137     STATIC_ROOT=os.path.join(os.path.dirname(BASE_DIR), "static-serve"),
```

En la carpeta Templates del proyecto crear un archivo que se llame base.html, el archivo debe estar al nivel de la carpeta que tiene el nombre de nuestra aplicación y que dentro tienes los archivos html de nuestras vistas.

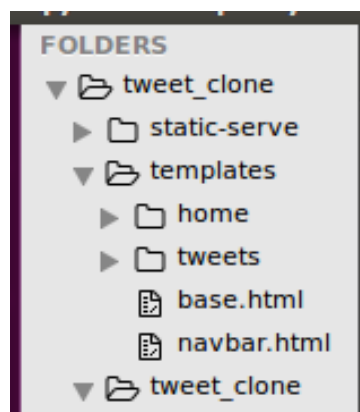

En la página de bootstrap copiar el siguiente código

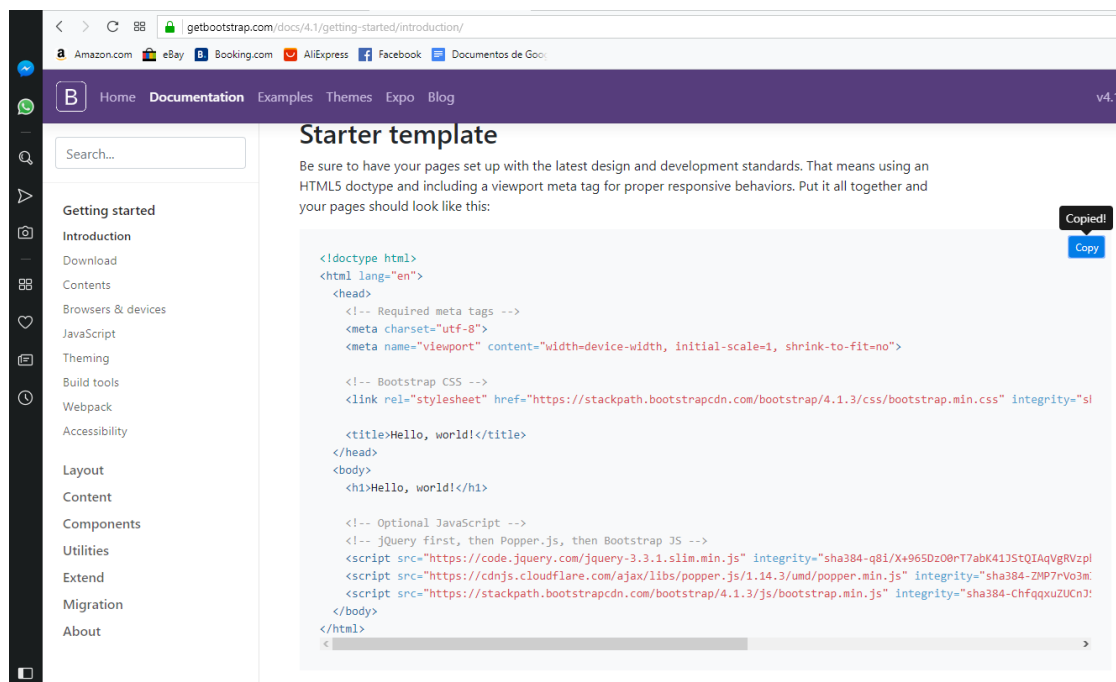

getbootstrap.com/docs/4.1/getting-started/introduction/

Amazon.com eBay Booking.com AliExpress Facebook Documentos de Google

Home Documentation Examples Themes Expo Blog v4.1

Starter template

Be sure to have your pages set up with the latest design and development standards. That means using an HTML5 doctype and including a viewport meta tag for proper responsive behaviors. Put it all together and your pages should look like this:

```
<!doctype html>
<html lang="en">
  <head>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">

    <!-- Bootstrap CSS -->
    <link rel="stylesheet" href="https://stackpath.bootstrapcdn.com/bootstrap/4.1.3/css/bootstrap.min.css" integrity="sl

  <title>Hello, world!</title>
</head>
<body>
  <h1>Hello, world!</h1>


  <!-- Optional JavaScript -->
  <!-- jQuery first, then Popper.js, then Bootstrap JS -->
  <script src="https://code.jquery.com/jquery-3.3.1.slim.min.js" integrity="sha384-q8i/X+965Dz00rT7abK41JStQIAqVgRVzpl
  <script src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.14.3/umd/popper.min.js" integrity="sha384-ZMP7rVo3m
  <script src="https://stackpath.bootstrapcdn.com/bootstrap/4.1.3/js/bootstrap.min.js" integrity="sha384-ChfqqxuZUCnJ:
</body>
</html>
```

Copied! Copy

Copiar el código de Bootstrap en el archivo base.html

```
base.html
1 {% load staticfiles %}
2
3 <!doctype html>
4 <html lang="en">
5
6 <!-- Required meta tags -->
7 <meta charset="utf-8">
8 <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
9
10 <!-- Bootstrap CSS -->
11 <link rel="stylesheet" href="https://stackpath.bootstrapcdn.com/bootstrap/4.1.3/css/bootstrap.min.css" integrity="sha384-MCW9/
12 SFnGE8fJT3GXwEongSv7Zt27NXFoaoApmYm81iuXoPF0Jw3ERdKnLPM0" crossorigin="anonymous">
13
14 <title>{% block title %}{% endblock %}</title>
15 </head>
16 <body>
17
18     {% include "navbar.html" %}
19
20     {% block content %}
21
22     {% endblock %}
23
24 <!-- Optional JavaScript -->
25 <!-- jQuery first, then Popper.js, then Bootstrap JS -->
26 <script src="https://code.jquery.com/jquery-3.3.1.slim.min.js" integrity="sha384-q8i/
27 X+96Dz08r77abK41JstQ1AqVgRVzpbzo5SmXKp4YfRvH+8abTTE1P6j1zo" crossorigin="anonymous"></script>
28 <script src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.14.3/umd/popper.min.js" integrity="
29 sha384-ZMP7rVo3mIykV+2+9j3UJ46jBkOWLalAdn689aCwoqb81iSnjAK/l8WVCWPIPM49" crossorigin="anonymous"></script>
30 <script src="https://stackpath.bootstrapcdn.com/bootstrap/4.1.3/js/bootstrap.min.js" integrity="
31 sha384-ChfqqxuZUCnSk3+MXmPNiY66ZbWh2IMqE241rYiqJxyMiZ6OW/JmZ05stwEULTy" crossorigin="anonymous"></script>
32 </body>
33 </html>
```

Agregar este código para incluir el contenido de Bootstrap a nuestros templates

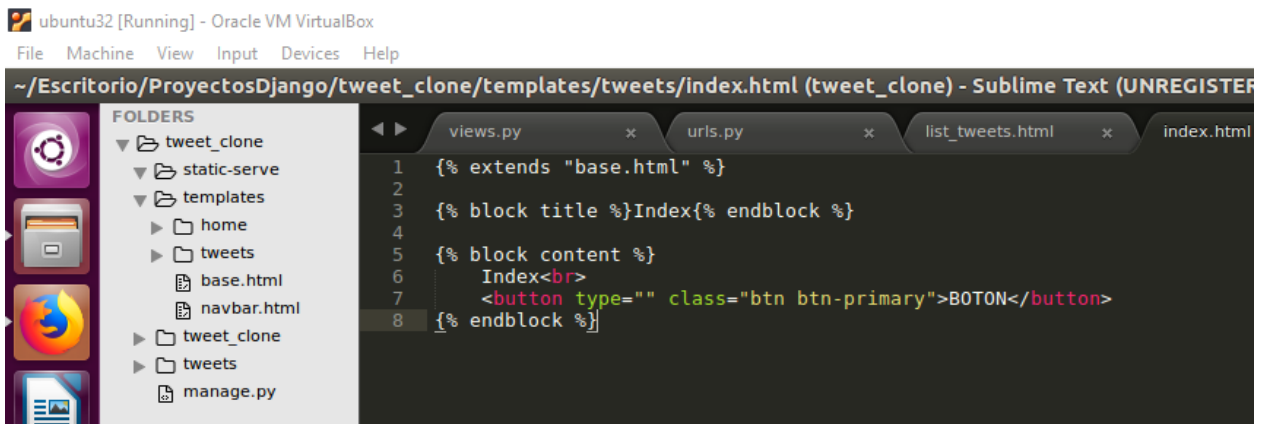

Iniciar el servidor y comprobar que nuestras vistas se modificaron

