


BLS and MQTT

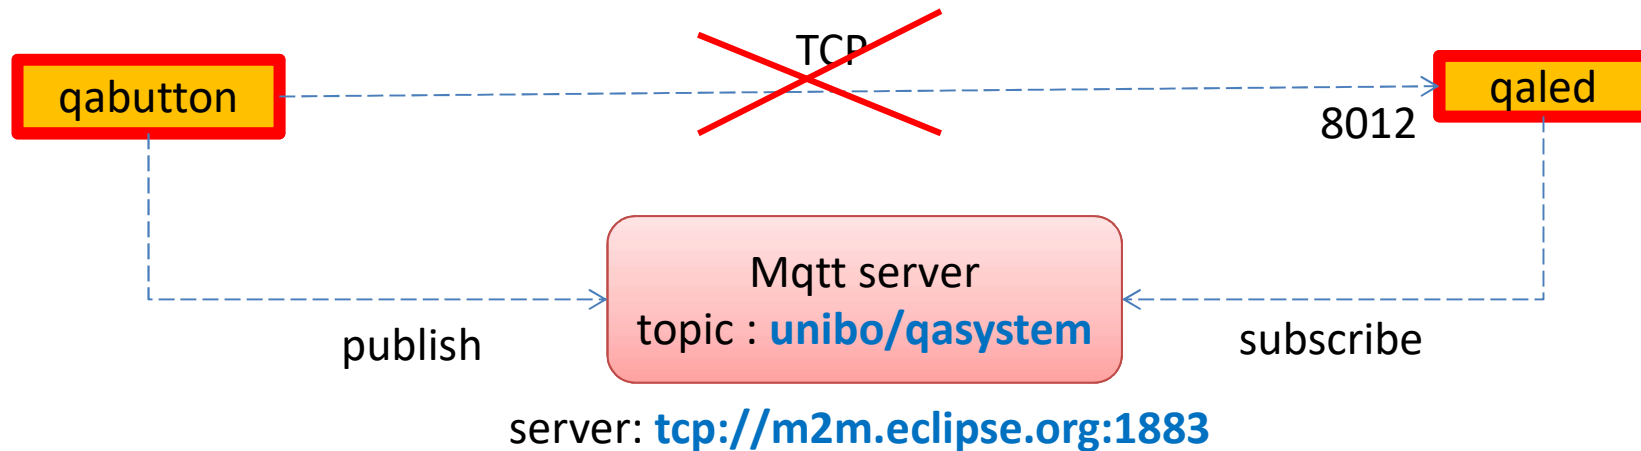

Every msg is sent via mqtt

Subscribe callback **messageArrived**
sends the message to the actor

`msg(MSGID, MSGTYPE, SENDER, RECEIVER, CONTENT, SEQNUM)`

See projects : `it.unibo.qactor.mqtt`
`it.unibo.bls2016.qa blsRaspButtonEvent`