PAC1

Pràctiques de Procrastinació-Avançada en LaTeX

Universitat Oberta de Catalunya

Vladimir Scoriae

I, **Vladimir Scoriae**, declare that I hold the total and full authorship of all the tasks that are carried out in this document. I am the only one who has elaborated each exercise. I have not shared the statements with anyone and the only help I have received has been through the UOC classroom and teachers there.

March 3, 2026

Contents

1 First UOC section **2**
1.1 UOC subsection 2
1.1.1 UOC subsubsection 2

2 pxPRP: property maps and lists **2**
2.1 Objects, keys, and access 2
2.2 Overwrite and append 2
2.3 Lists: `\pxPutValue`, `\pxListSet`, `\pxListAll` 2
2.4 Clear key/object and predicates 2
2.5 Boolean flags and scalar access 2
2.6 List clear and compact API 2

3 pxUML: class diagrams **3**
3.1 Classes and diagram 3
3.2 Enums and associations 4

4 pxSRC: safe images **4**

5 pxTAB: predefined tables **9**

6 pxCORE: setup and debug **10**

7 pxGDX: layout helpers **10**

1 First UOC section

P^{3}CTEX Sample text with UOC section style.

1.1 UOC subsection

1.1.1 UOC subsubsection

More text with UOC subsection style.
Thin horizontal rule:

Thick horizontal rule (centered):

---

2 pxPRP: property maps and lists

2.1 Objects, keys, and access

`\pxGET␣DEMO.k1[2]` → v2.
`\pxPRINTF␣DEMO.k2[2]` → **DEMO.k2[2]:**vB.

2.2 Overwrite and append

Before overwrite: OVER.state[1] = old. After: OVER.state[1] = newA, OVER.state[2] = newB.

2.3 Lists: `\pxPutValue`, `\pxListSet`, `\pxListAll`

LST.items = (a, b, c).
All values (expected 1–3): 1 – 2 – 3.

2.4 Clear key/object and predicates

Before clear: TMP.k[1] = X. After: TMP.k[1] = Z. Now: TMP.k[1] = P.
Object MISSING is not present, as expected.
CHK exists. Key `nums` exists in CHK. Length of CHK.nums: 3.

2.5 Boolean flags and scalar access

ON, ON.
Scalar SCALAR.flag: true.
Scalar SCALAR.text: Hello, world..
Missing key: [].

2.6 List clear and compact API

Length before clear: 3. Length after clear: 0. Values: x,y.
After `\pxSETlst`: z,a. After `\pxSET`: A. After `\pxPUT`: AB. With separator: A, B.

3 pxUML: class diagrams

3.1 Classes and diagram

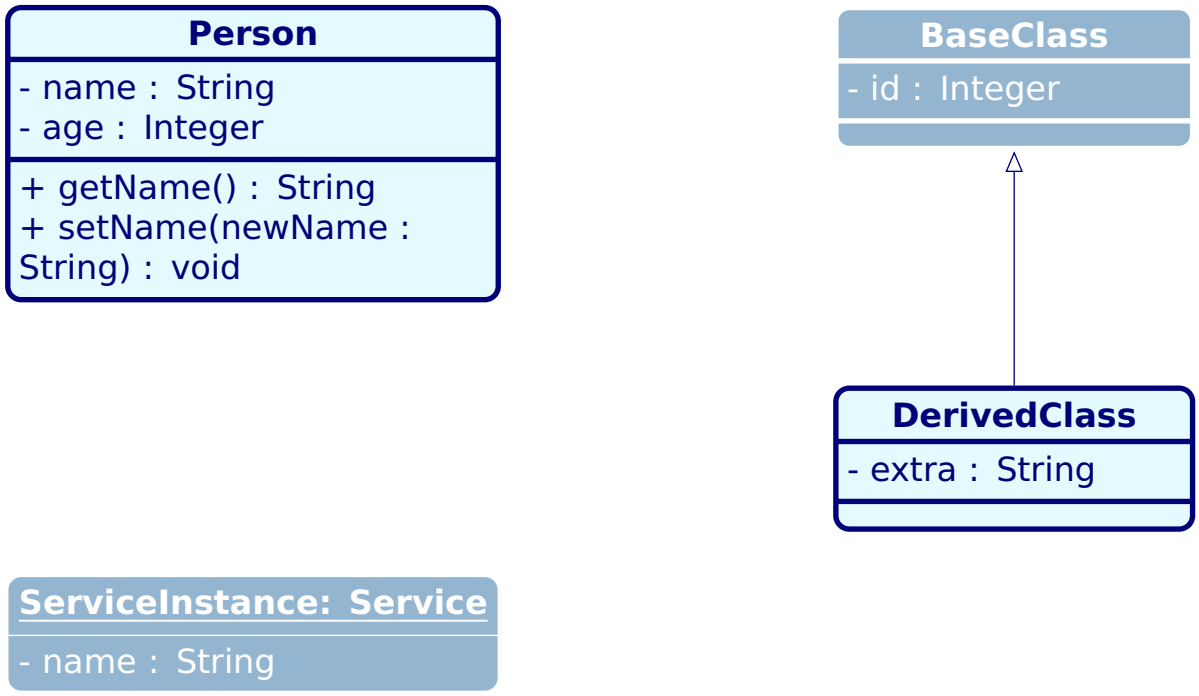

Inspection: Person attributes: [- name : String,- age : Integer].
Service operations: [+ run() : void].
Parents of DerivedClass: [BaseClass].
Non-existent class: [].

3.2 Enums and associations

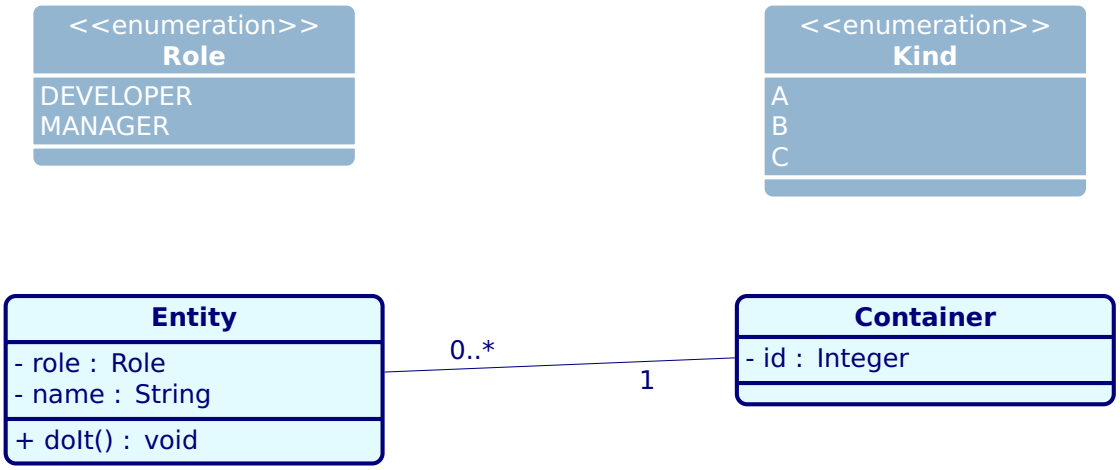

4 pxSRC: safe images

Figure 1: Single image caption

Figure 2: Caption (optional width; color uses default)

Figure 3: Pair caption

Figure 4: Step one

Figure 5: Step two

Figure 6: Step three

Figure 7: Step four

5 pxTAB: predefined tables

Name	Age	City
Alice	20	Barcelona
Bob	22	Madrid

Code	Description
PX1	First code
PX2	Second code

m11	m12	m13
m21	m22	m23

Language	Users
LaTeX	Many
P3CTeX	Felizment cada cop més

Table 1: Sample pxTAB float table

Module	Feature
pxSRC	Safe image inclusion
pxTAB	Predefined table styles

Table 1 shows a small pxTAB float that can be cross-referenced in the usual way.

Criterion	Weight	Notes
Design	40%	Structure and clarity
Implementation	40%	Correctness and style
Testing	20%	Coverage and edge cases

Student	PEC 1	PEC 2	Final
Alice	8.0	9.0	8.5
Bruno	7.5	8.0	7.8
Carla	9.0	9.5	9.3
Daniel	6.5	7.0	6.8

6 pxCORE: setup and debug

Debug state: [DEBUG-OFF].

7 pxGDX: layout helpers

Example title text