pxPM: project management

1 Daily Gantt charts

The closing environment delimiter renders the chart automatically. The existing command form, `\pxGantt{...}` followed by `\pxGanttEnd`, remains available for programmatic construction. The `pxPM` planning tool provides a scoped chart environment using `pgfgantt`; it does not change the document orientation. Select it when loading P3CTeX: `\documentclass[project-management,PR,CAT]{P3CTeX}`. Outside the class, use `\usepackage{pxPM}`.


```
\begin{pxGantt}{start=01/10/2026,end=31/01/2027,days-per-block=28}
\pxGanttItem{Investigation}{01/10/2026}{20/10/2026}
\pxGanttItem{Implementation}{15/10/2026}{15/12/2026}
\end{pxGantt}
```

Options: `start`, `end` (required dd/mm/yyyy), `days-per-block` (default 28), `days-per-page` (alias), `day-width` (optional TeX length), `label-width` (manual override), `label-max-width` (default `.24\linewidth`), `rotate=true` (optional chart-only rotation).


By default the label column is measured from actual task text and capped relative to the available line width. Remaining width is divided among calendar days. The date range is balanced into consecutive blocks, and bars crossing block boundaries are clipped. P3CTeX colours are reused; standalone users receive fallback colours.

Example

01/10/2026– 28/10/2026

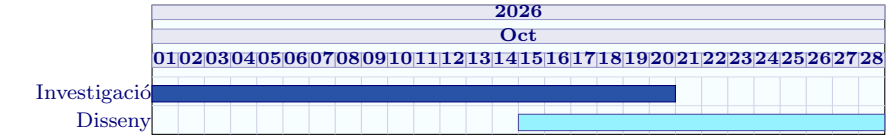

29/10/2026– 25/11/2026

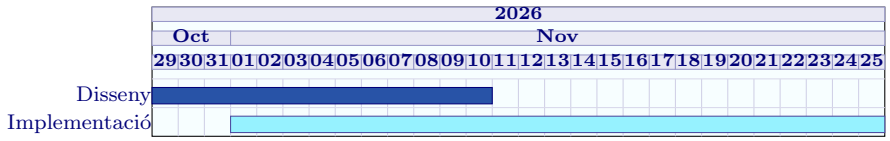

2 Project planning tools

Load `project-management` in the P3CTeX class, or load `pxPM` with a standard document class. The same tool provides SWOT/DAFO tables, user stories, scenarios, use-case descriptions and Gantt schedules. Labels follow P3CTeX's Catalan, Spanish and English language selection.

```
\pxSWOT{Strengths}{Weaknesses}{Opportunities}{Threats}
\begin{pxUserStory}{Reserve equipment}
  \pxAsA{a customer}
  \pxIWant{to reserve equipment}
  \pxSoThat{I can plan a shoot}
  \pxAcceptanceCriteria{The reservation is confirmed.}
\end{pxUserStory}
\begin{pxScenario}{Successful reservation}
  \pxGiven{available equipment}
  \pxWhen{a customer confirms}
  \pxThen{a reservation is created}
\end{pxScenario}
\begin{pxUseCase}{Reserve equipment}
  \pxActors{Customer}
  \pxPreconditions{Equipment is available.}
  \pxMainFlow{Select equipment, then confirm.}
  \pxAlternatives{Choose another date if unavailable.}
  \pxPostconditions{A reservation exists.}
\end{pxUseCase}
```

Fields accept paragraphs and shared preamble commands. Card environments accept local tcolorbox options; `\pxPMsetup{labels={...},box-options={...}}` customises defaults. Gantt commands below belong to the same package.