# PAC1

# Pràctiques de Procrastinació-Avançada en LaTeX

Universitat Oberta de Catalunya


## Vladimir Scoriae


I, **Vladimir Scoriae**, declare that I hold the total and full authorship of all the tasks that are carried out in this document. I am the only one who has elaborated each exercise. I have not shared the statements with anyone and the only help I have received has been through the UOC classroom and teachers there.

**February 28, 2026**

# Contents

**1 First UOC section** **2**
1.1 UOC subsection . . . . . 2
1.1.1 UOC subsubsection . . . . . 2

**2 pxPRP: property maps and lists** **2**
2.1 Objects, keys, and access . . . . . 2
2.2 Overwrite and append . . . . . 2
2.3 Lists: `\pxPutValue`, `\pxListSet`, `\pxListAll` . . . . . 2
2.4 Clear key/object and predicates . . . . . 2
2.5 Boolean flags and scalar access . . . . . 2
2.6 List clear and compact API . . . . . 2

**3 pxUML: class diagrams** **3**
3.1 Classes and diagram . . . . . 3
3.2 Enums and associations . . . . . 4

**4 pxSRC: safe images** **4**

**5 pxCORE: setup and debug** **9**

**6 pxGDX: layout helpers** **9**

# 1 First UOC section

Sample text with UOC section style.

## 1.1 UOC subsection

### 1.1.1 UOC subsubsection

More text with UOC subsection style.
Thin horizontal rule:

---

Thick horizontal rule (centered):

---

# 2 pxPRP: property maps and lists

## 2.1 Objects, keys, and access

`\pxGET␣DEMO.k1[2]` → v2.
`\pxPRINTF␣DEMO.k2[2]` → **DEMO.k2[2]:**vB.

## 2.2 Overwrite and append

Before overwrite: OVER.state[1] = old. After: OVER.state[1] = newA, OVER.state[2] = newB.

## 2.3 Lists: `\pxPutValue`, `\pxListSet`, `\pxListAll`

LST.items = (a, b, c).
All values (expected 1–3): 1 – 2 – 3.

## 2.4 Clear key/object and predicates

Before clear: TMP.k[1] = X. After: TMP.k[1] = Z. Now: TMP.k[1] = P.
Object MISSING is not present, as expected.
CHK exists. Key `nums` exists in CHK. Length of CHK.nums: 3.

## 2.5 Boolean flags and scalar access

ON, ON.
Scalar SCALAR.flag: true.
Scalar SCALAR.text: Hello, world..
Missing key: [].

## 2.6 List clear and compact API

Length before clear: 3. Length after clear: 0. Values: x,y.
After `\pxSETlst`: z,a. After `\pxSET`: A. After `\pxPUT`: AB. With separator: A, B.

# 3 pxUML: class diagrams

## 3.1 Classes and diagram

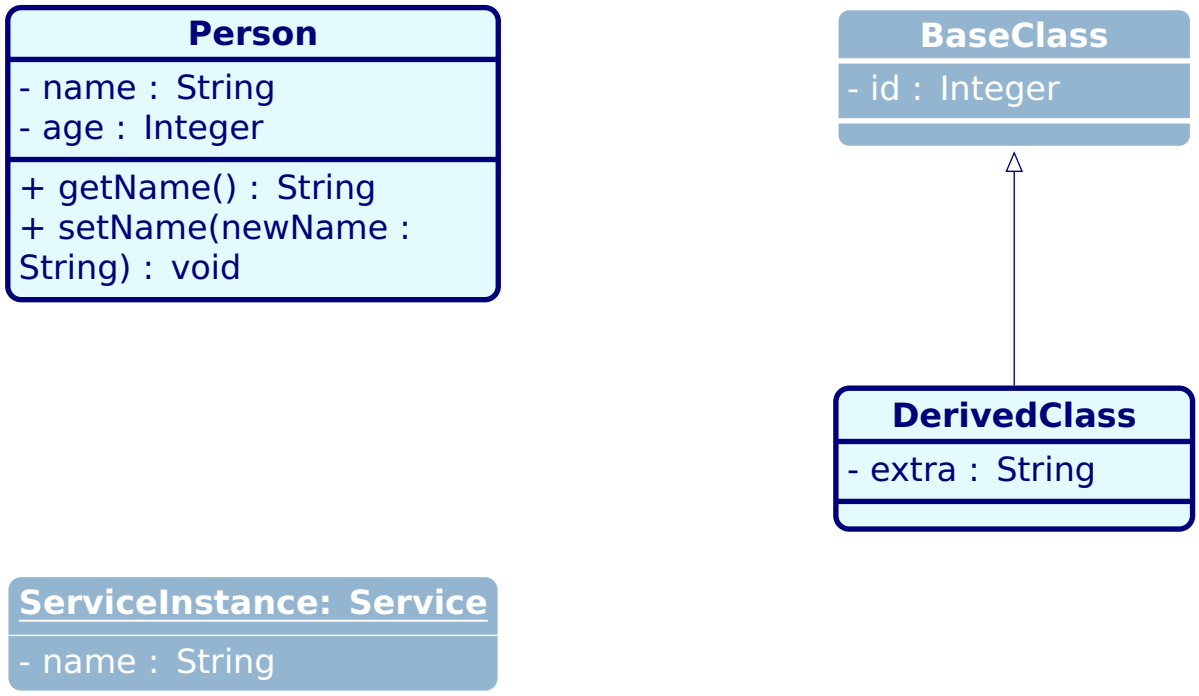


Inspection: Person attributes: [- name : String,- age : Integer].
Service operations: [+ run() : void].
Parents of DerivedClass: [BaseClass].
Non-existent class: [].

### 3.2 Enums and associations

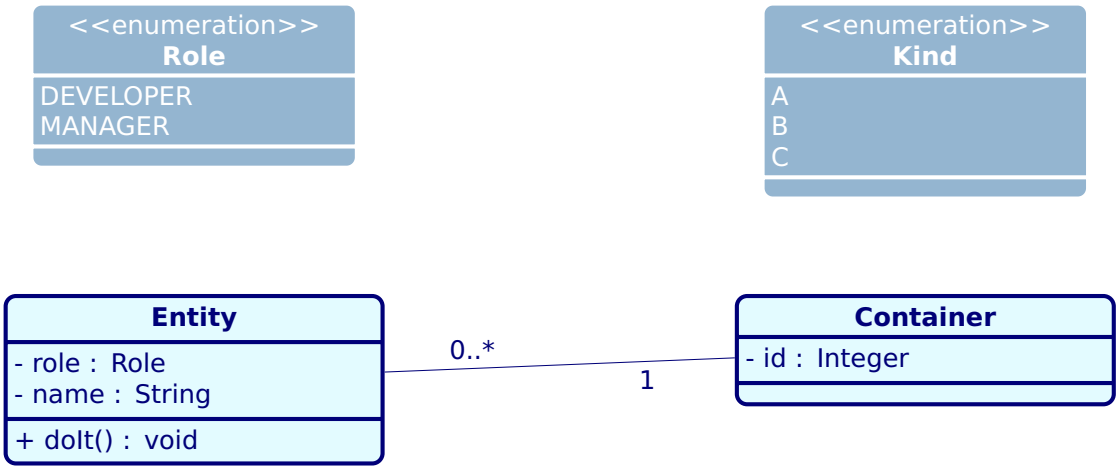


## 4 pxSRC: safe images

Figure 1: Single image caption

Figure 2: Caption (optional width; color uses default)

Figure 3: Pair caption

Figure 4: Step one

Figure 5: Step two

Figure 6: Step three

Figure 7: Step four

## 5 pxCORE: setup and debug

Debug state: [DEBUG-OFF].

## 6 pxGDX: layout helpers

# Example title text