


1 · System map: apps and connections

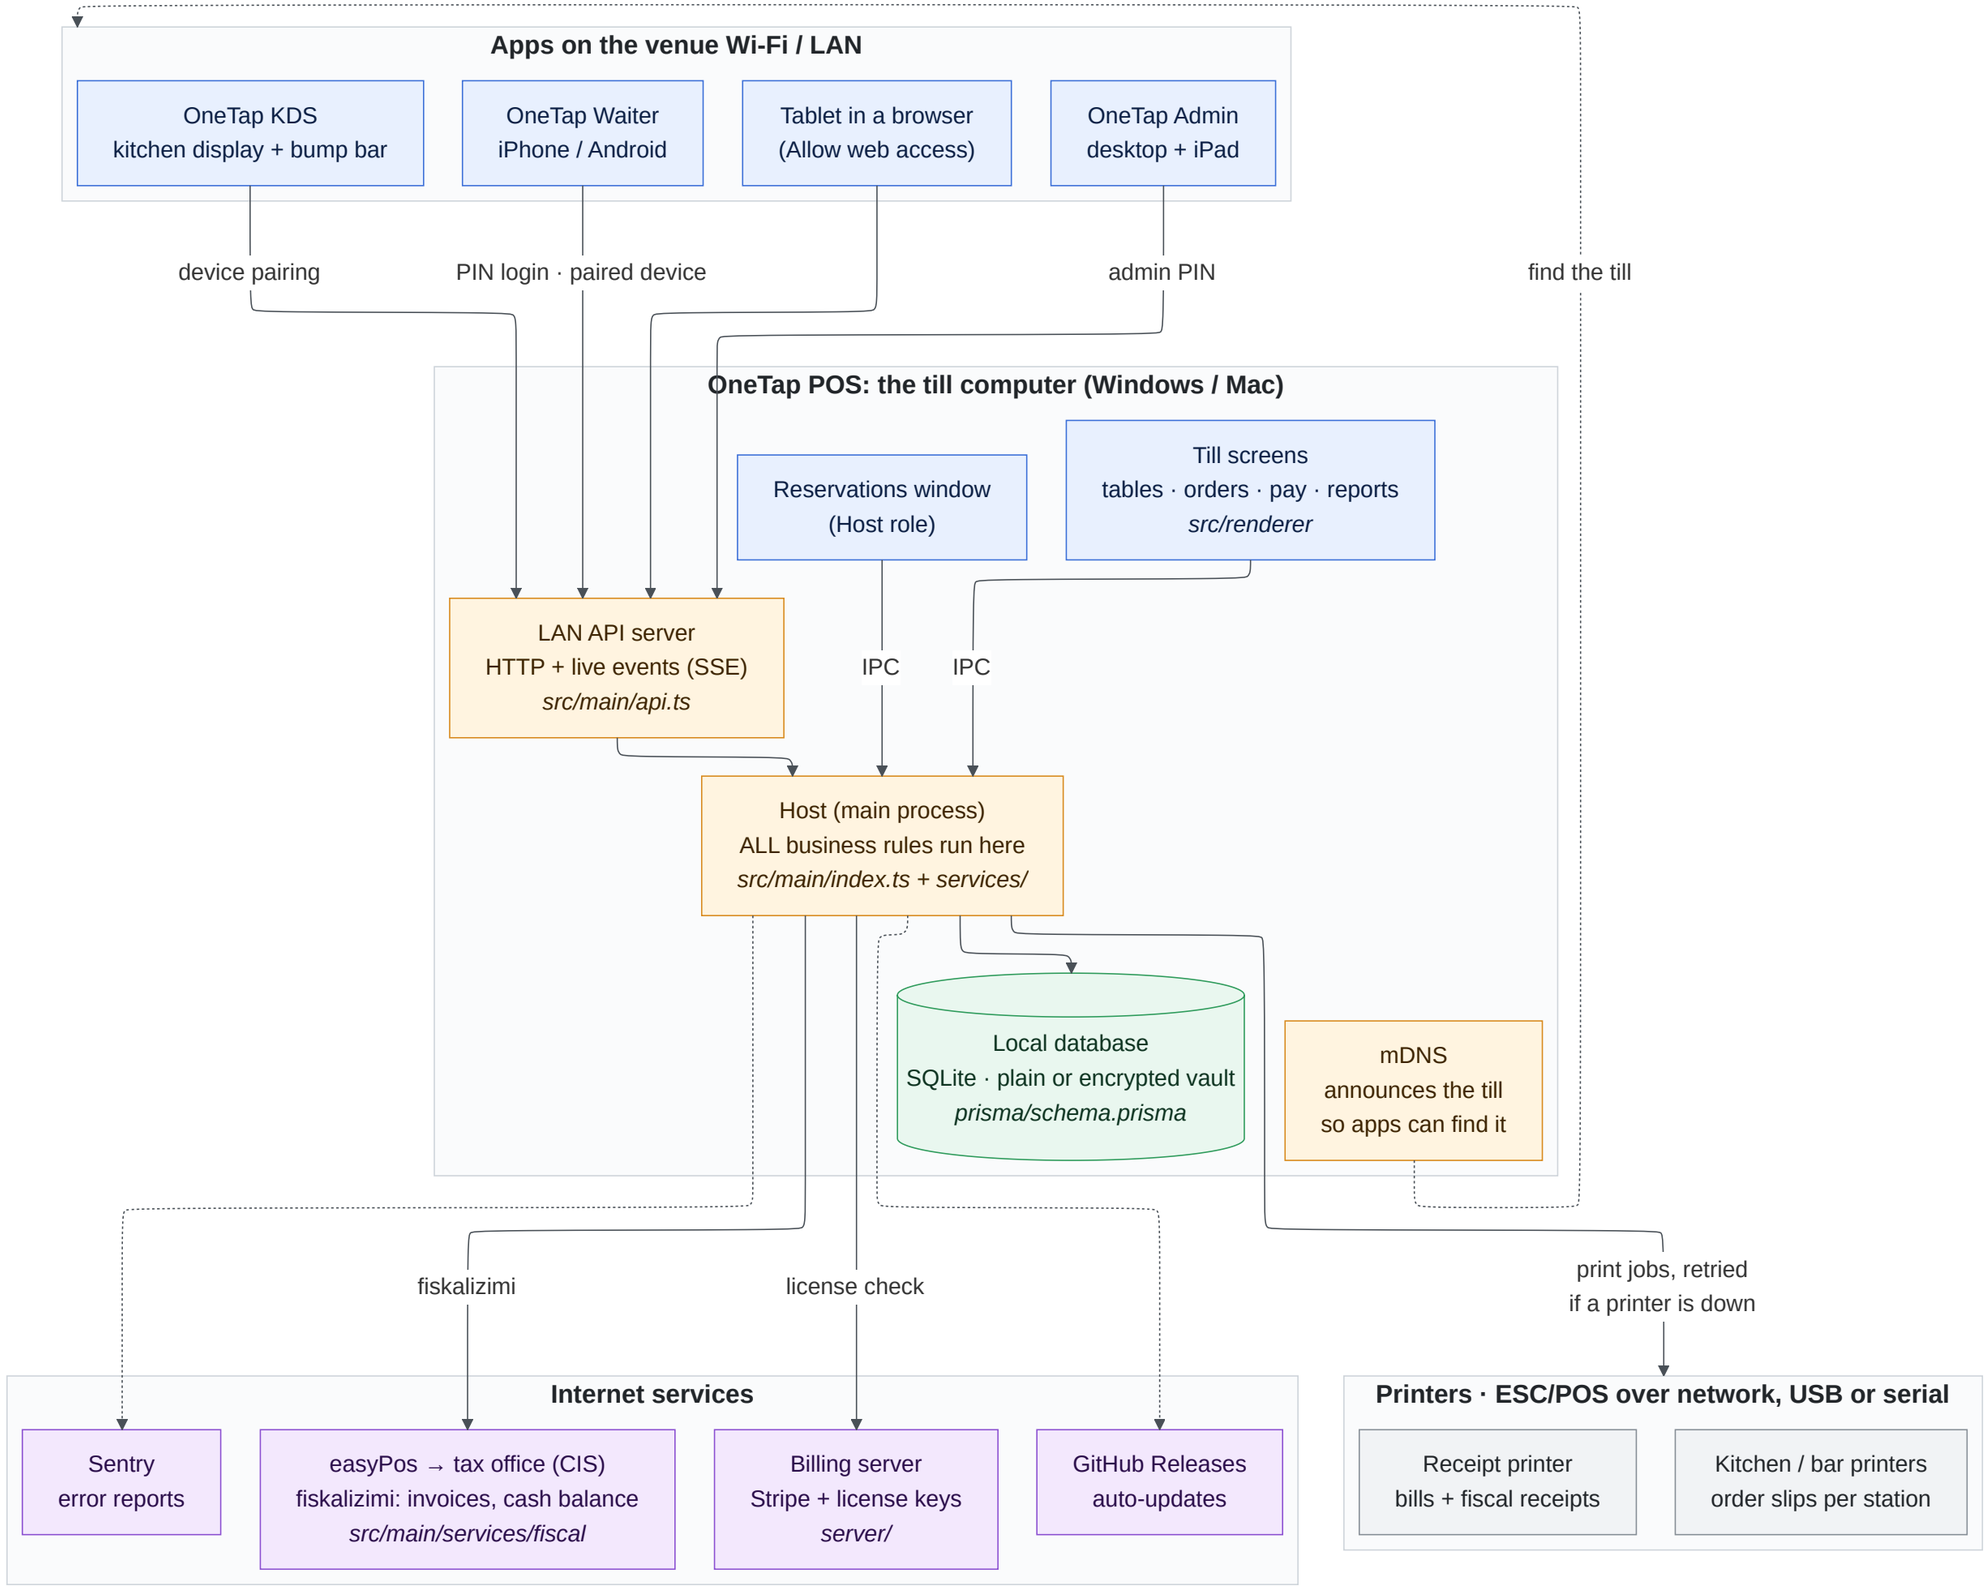


2 · Life of an order

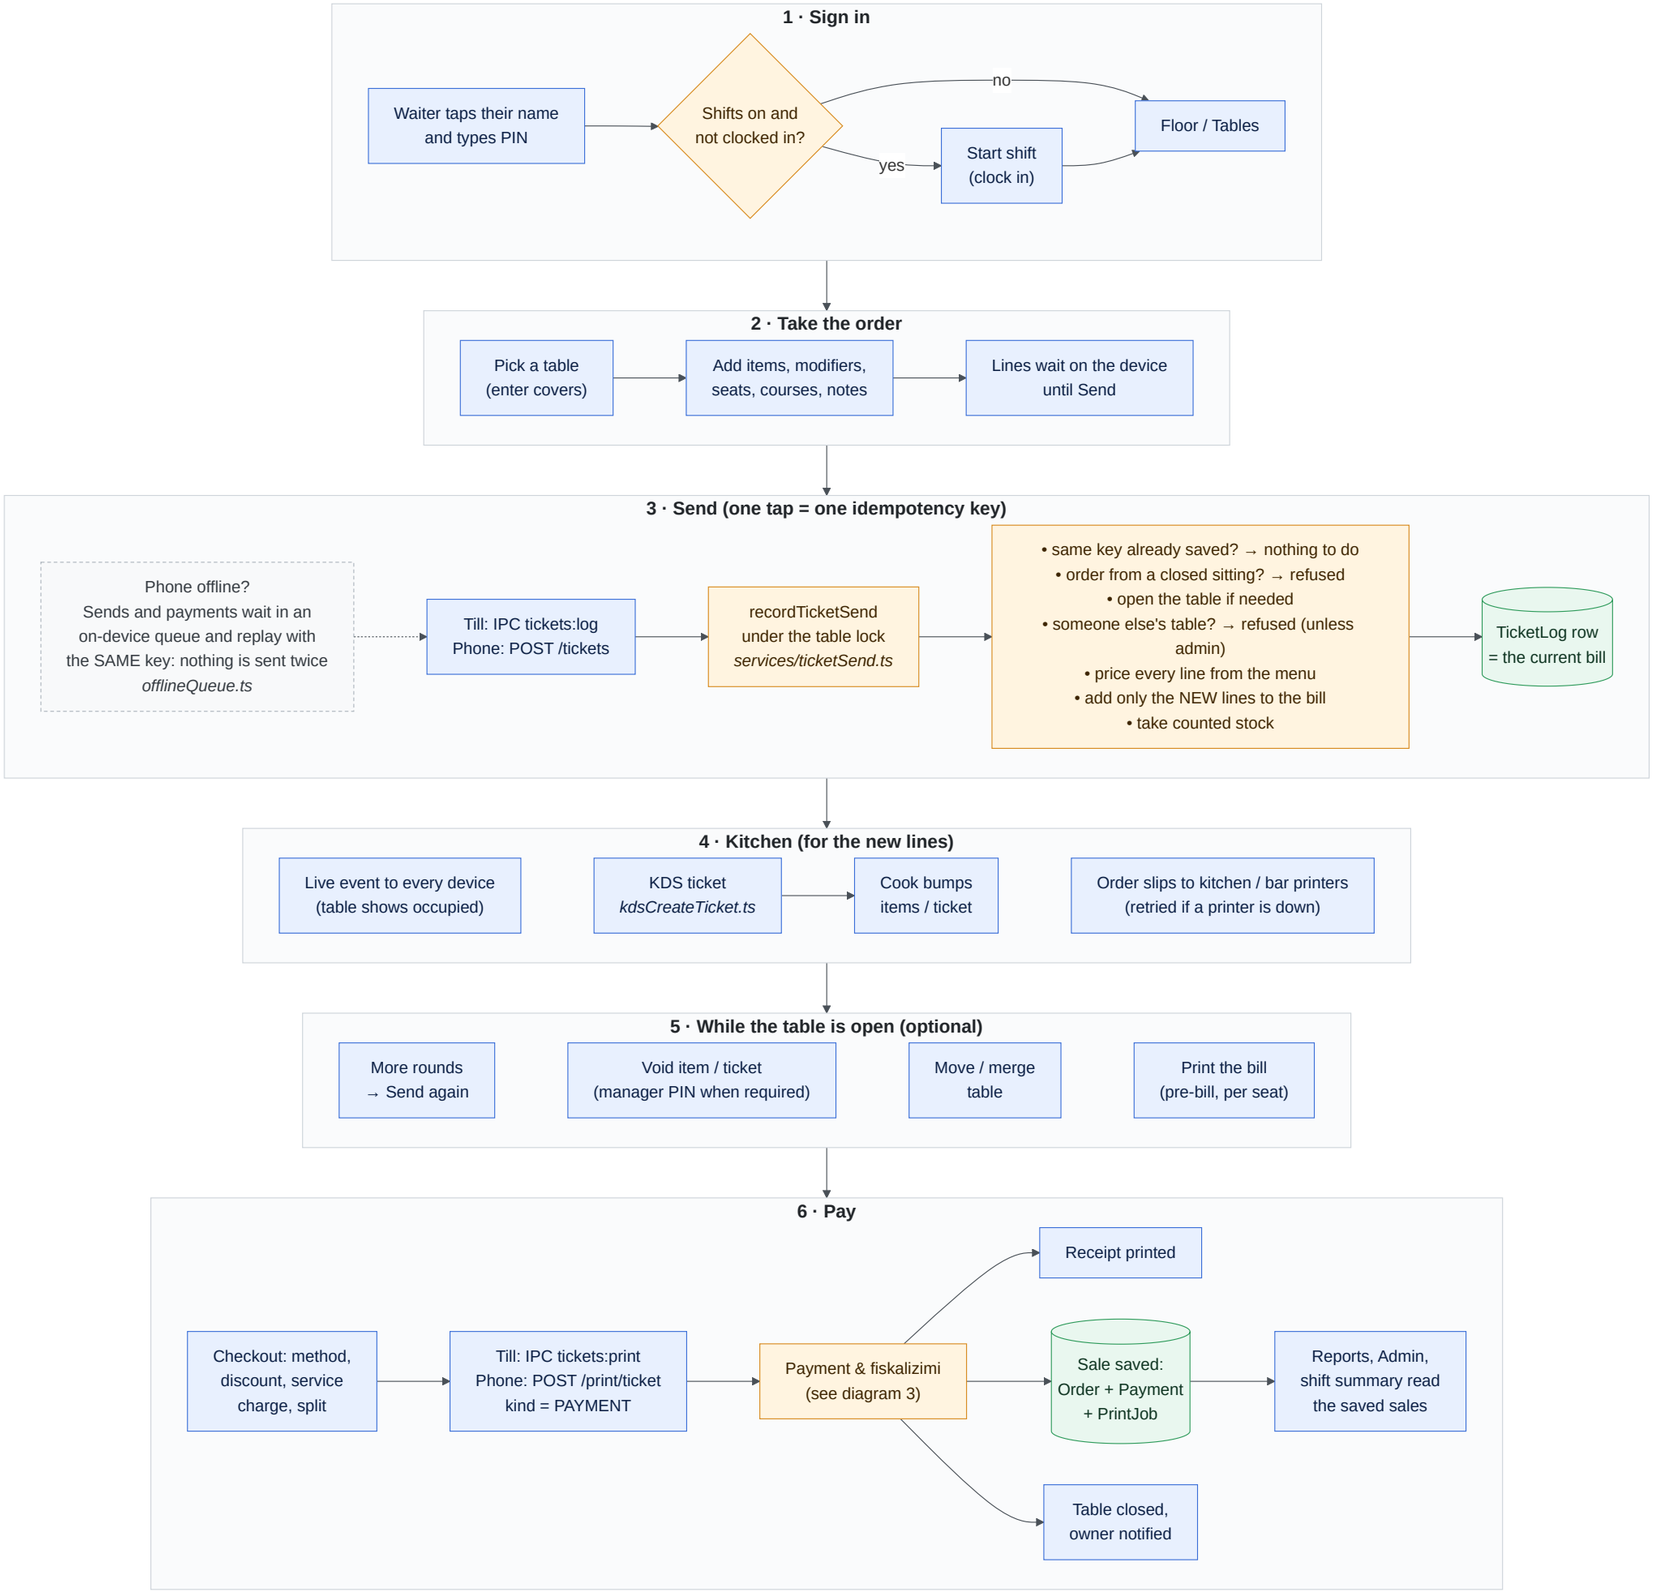


3 · Payment & fiskalizimi

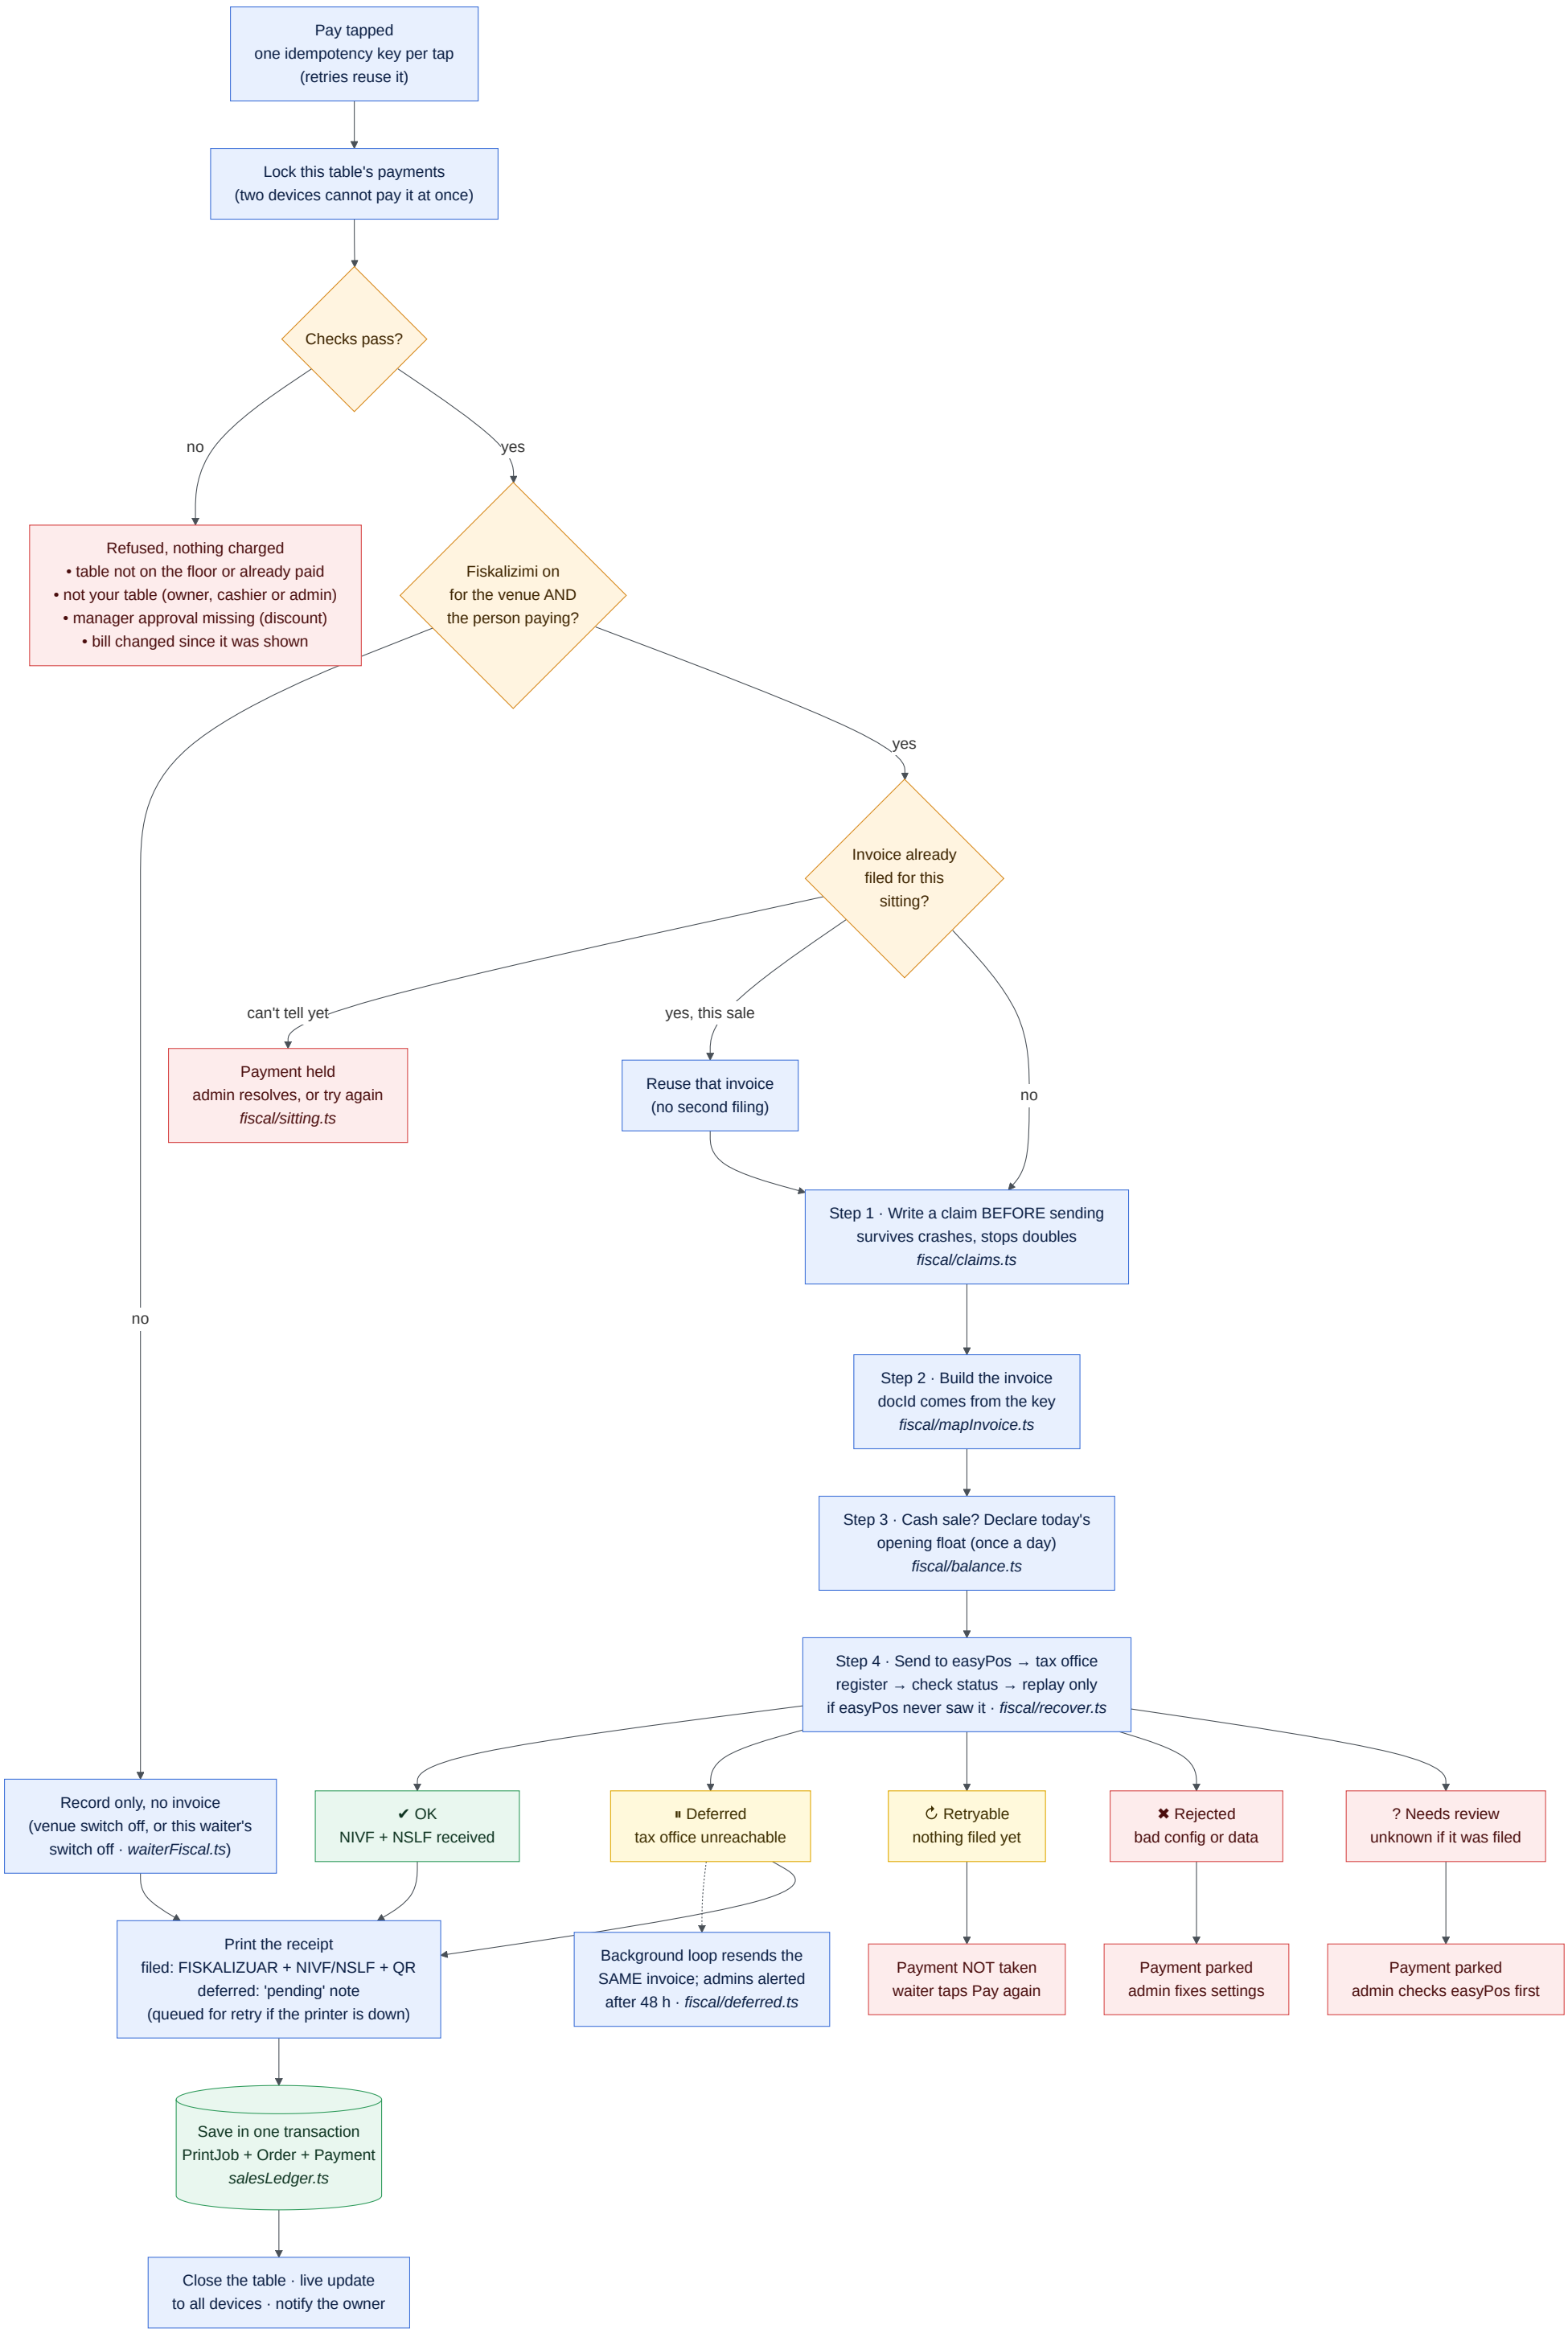


4 · Data model: what the till stores

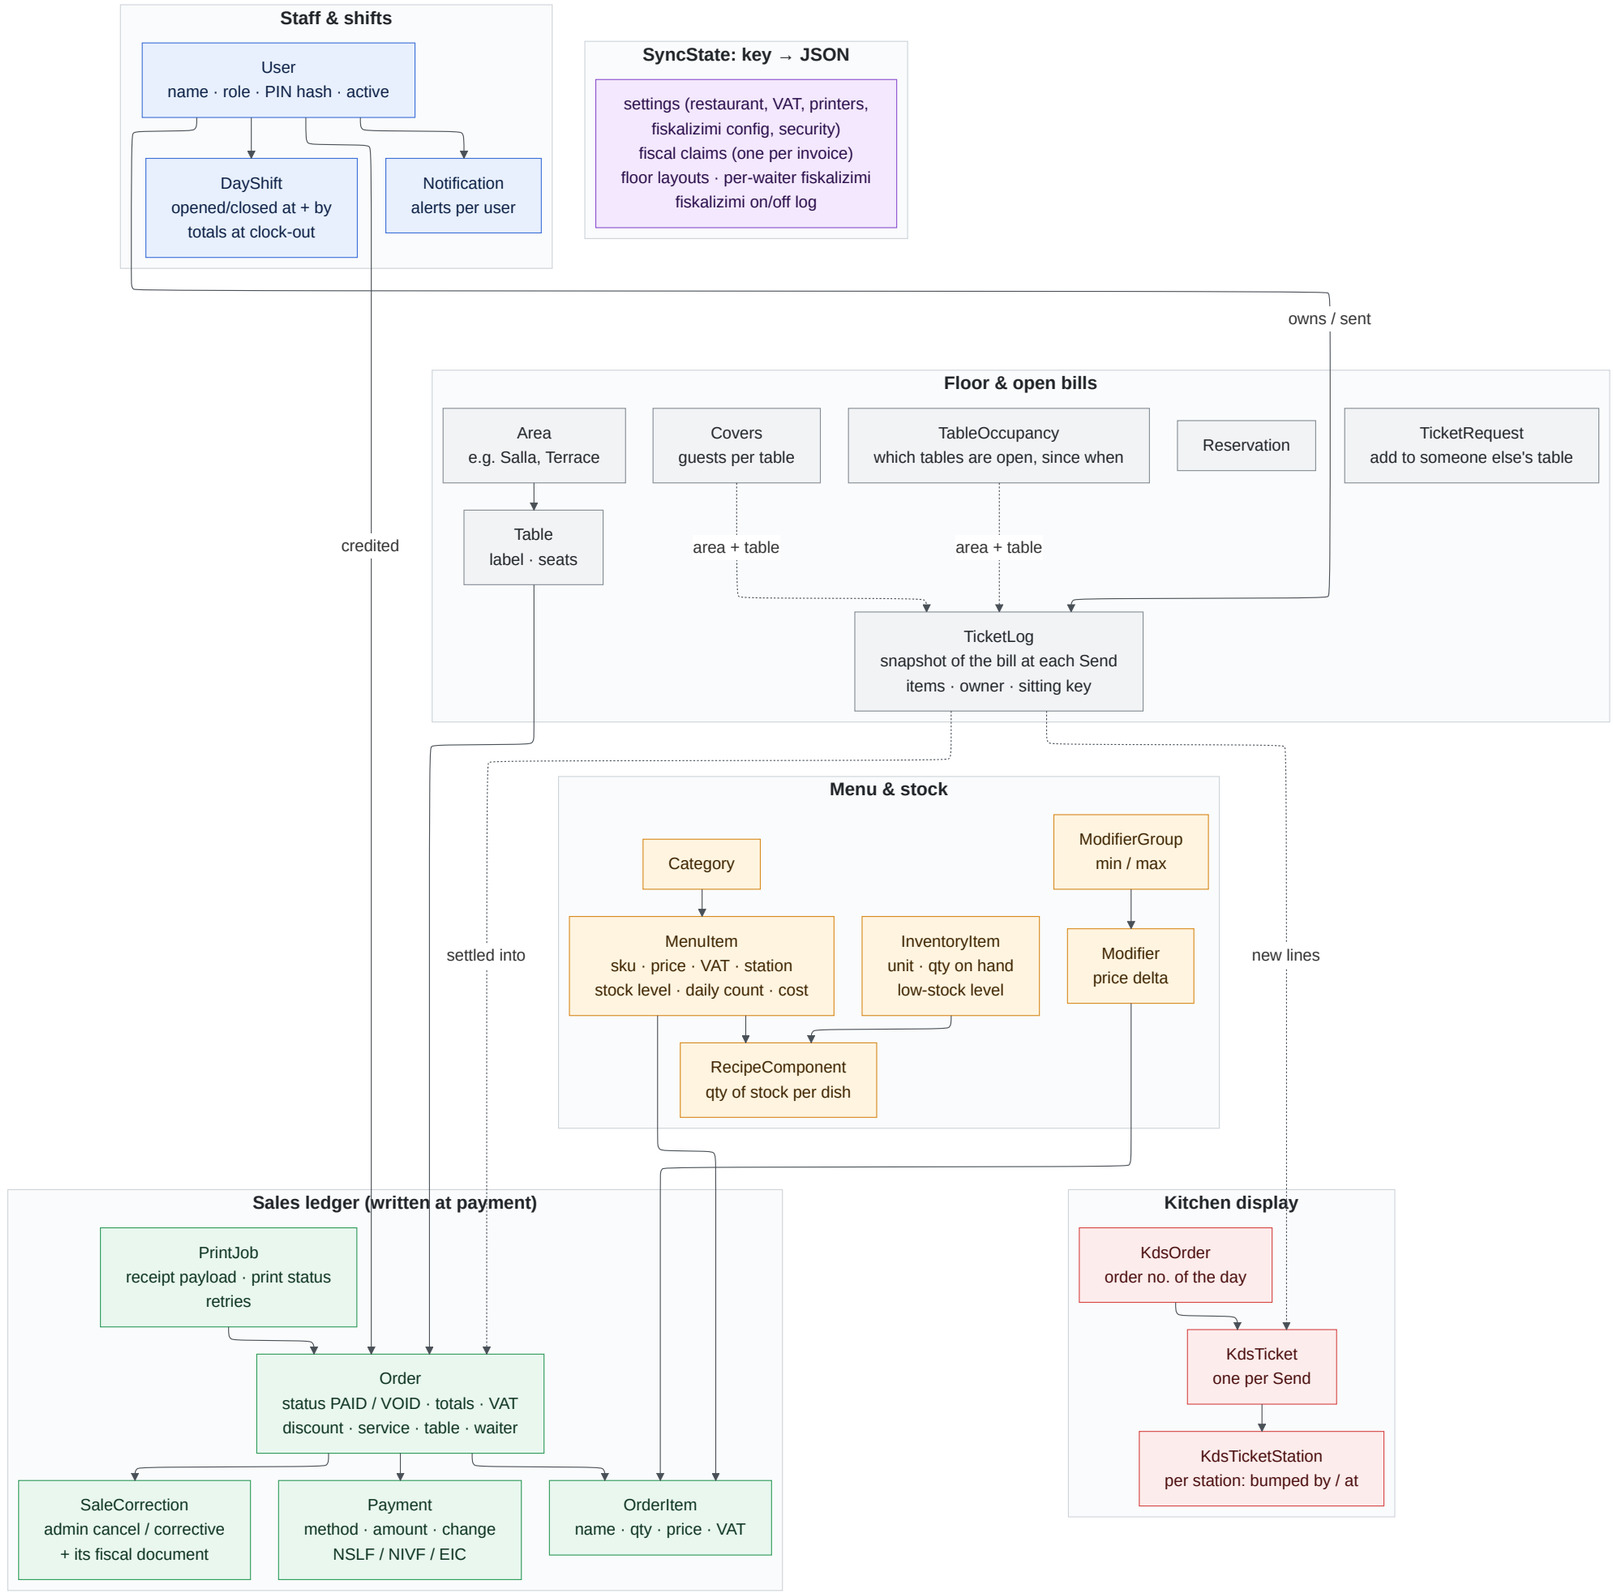


5 · Sign-in & security

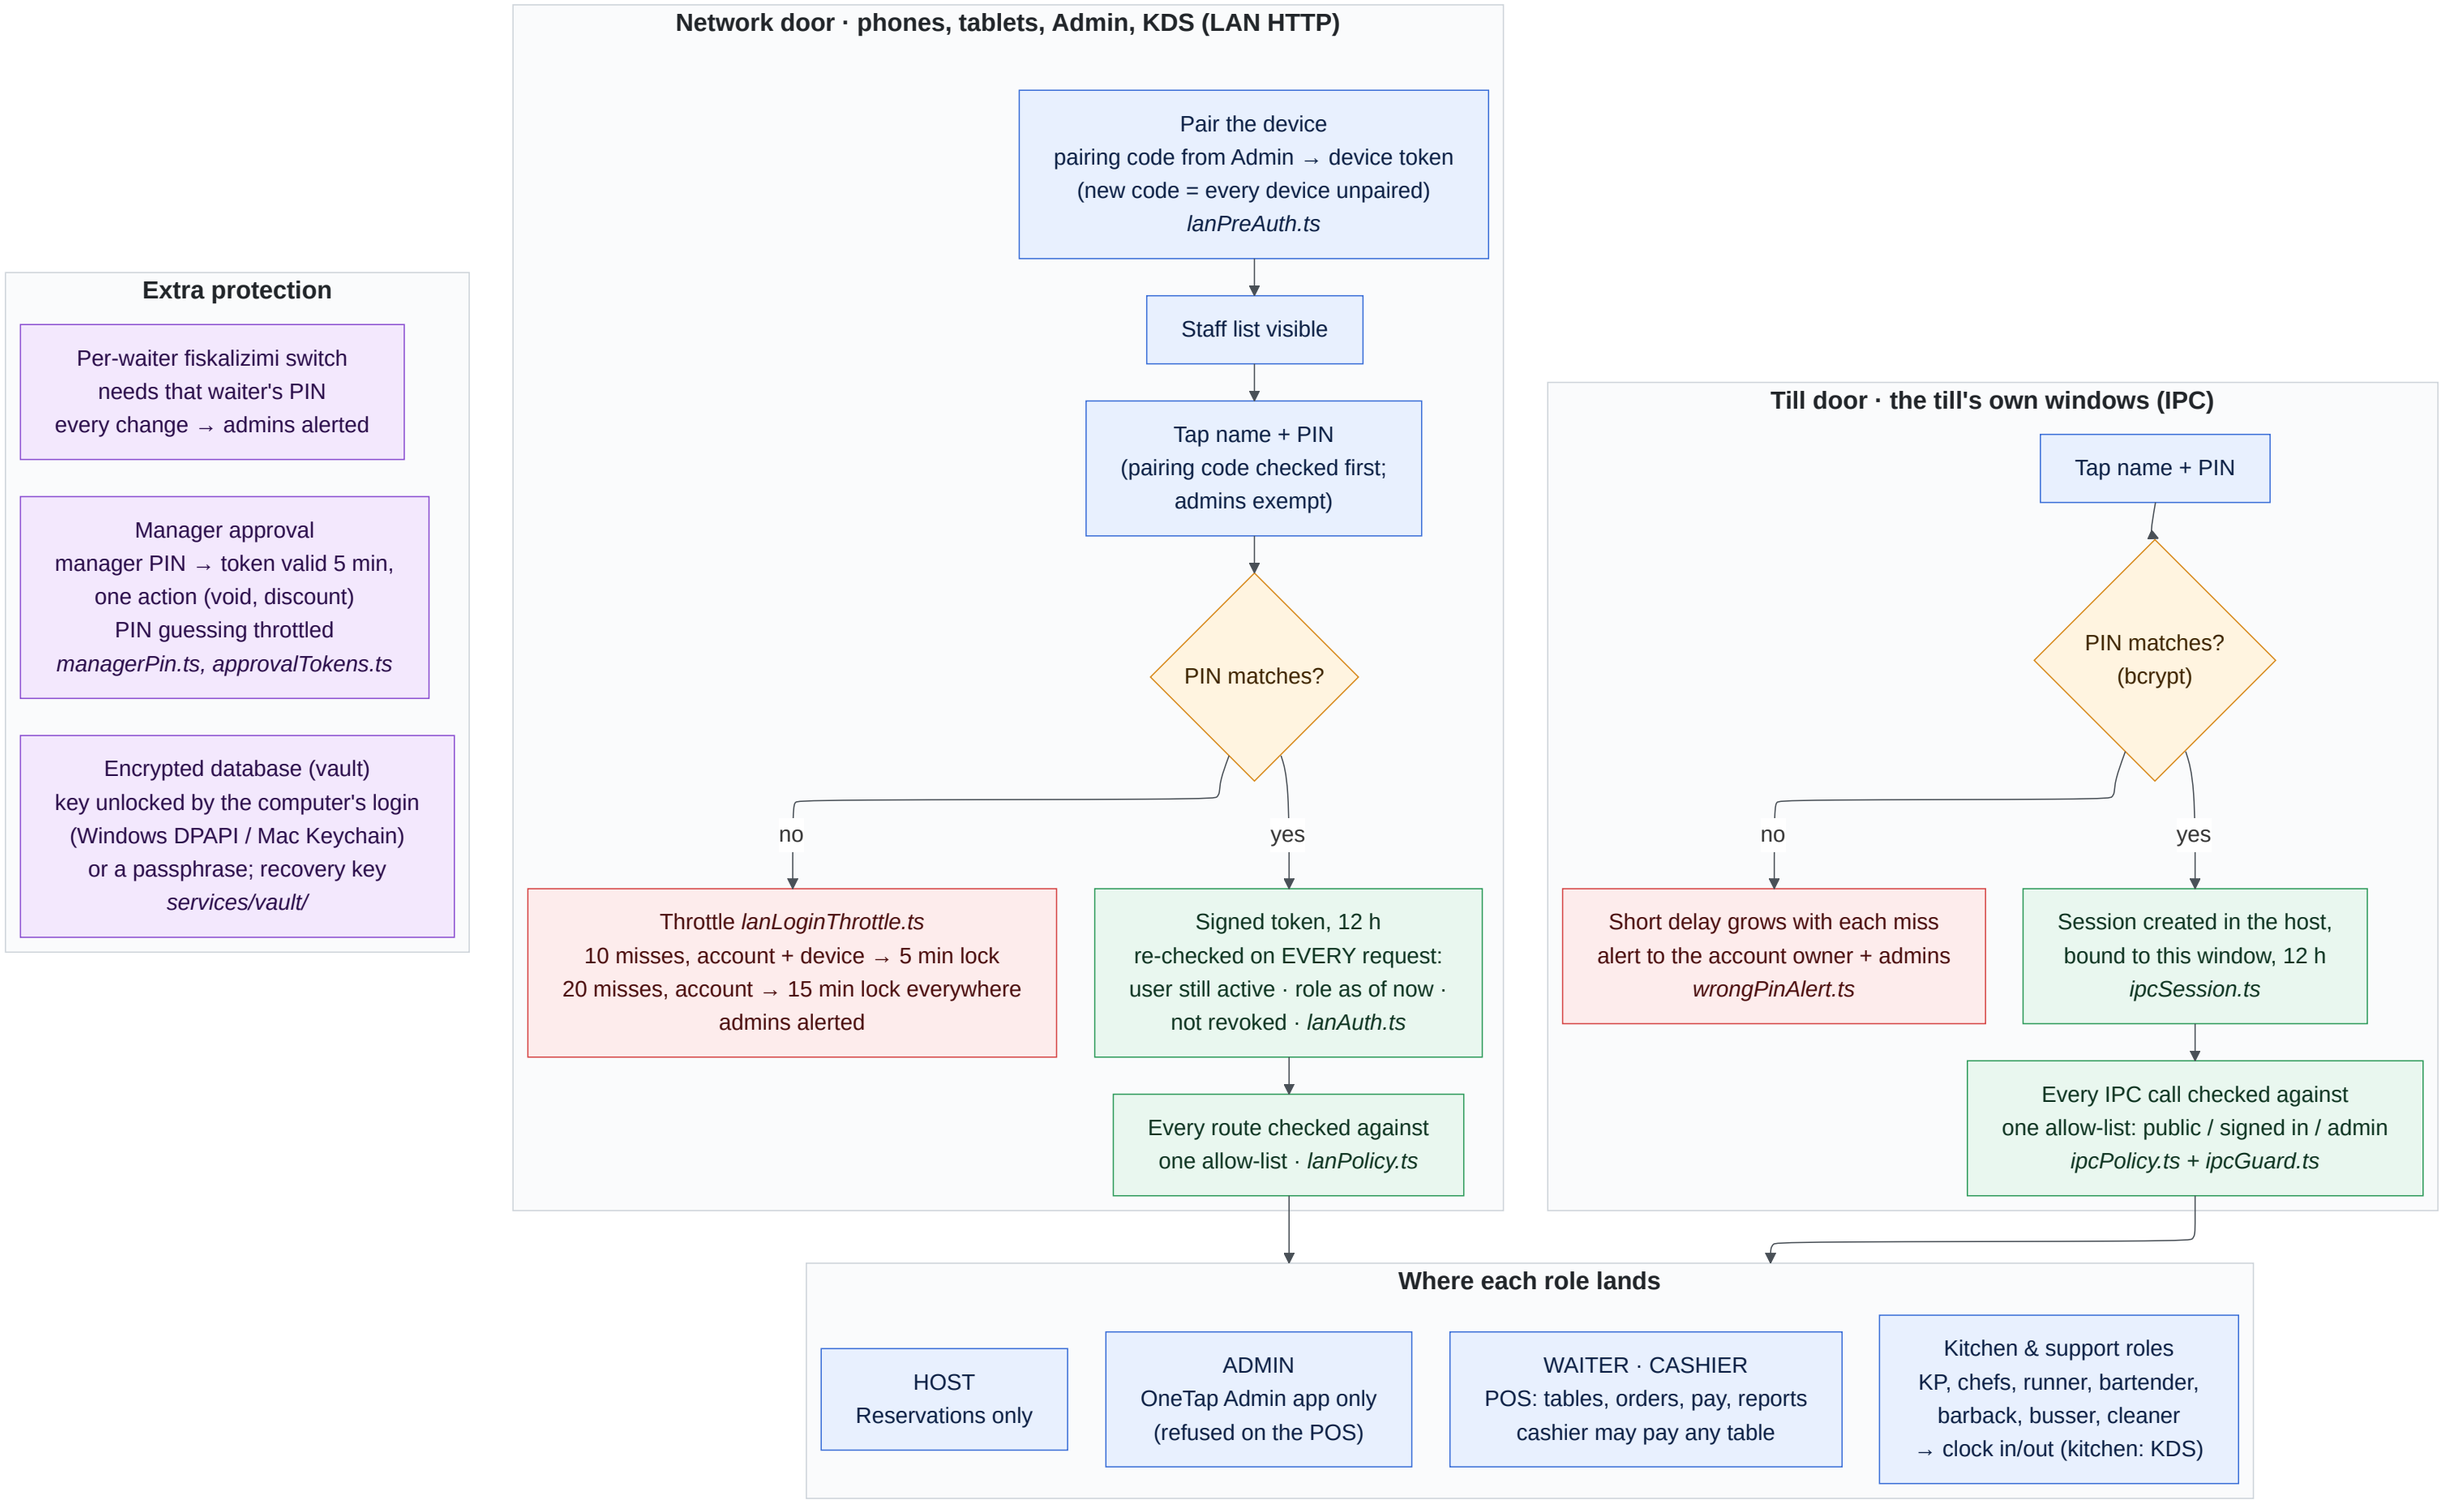



6 · Shifts & clock-in

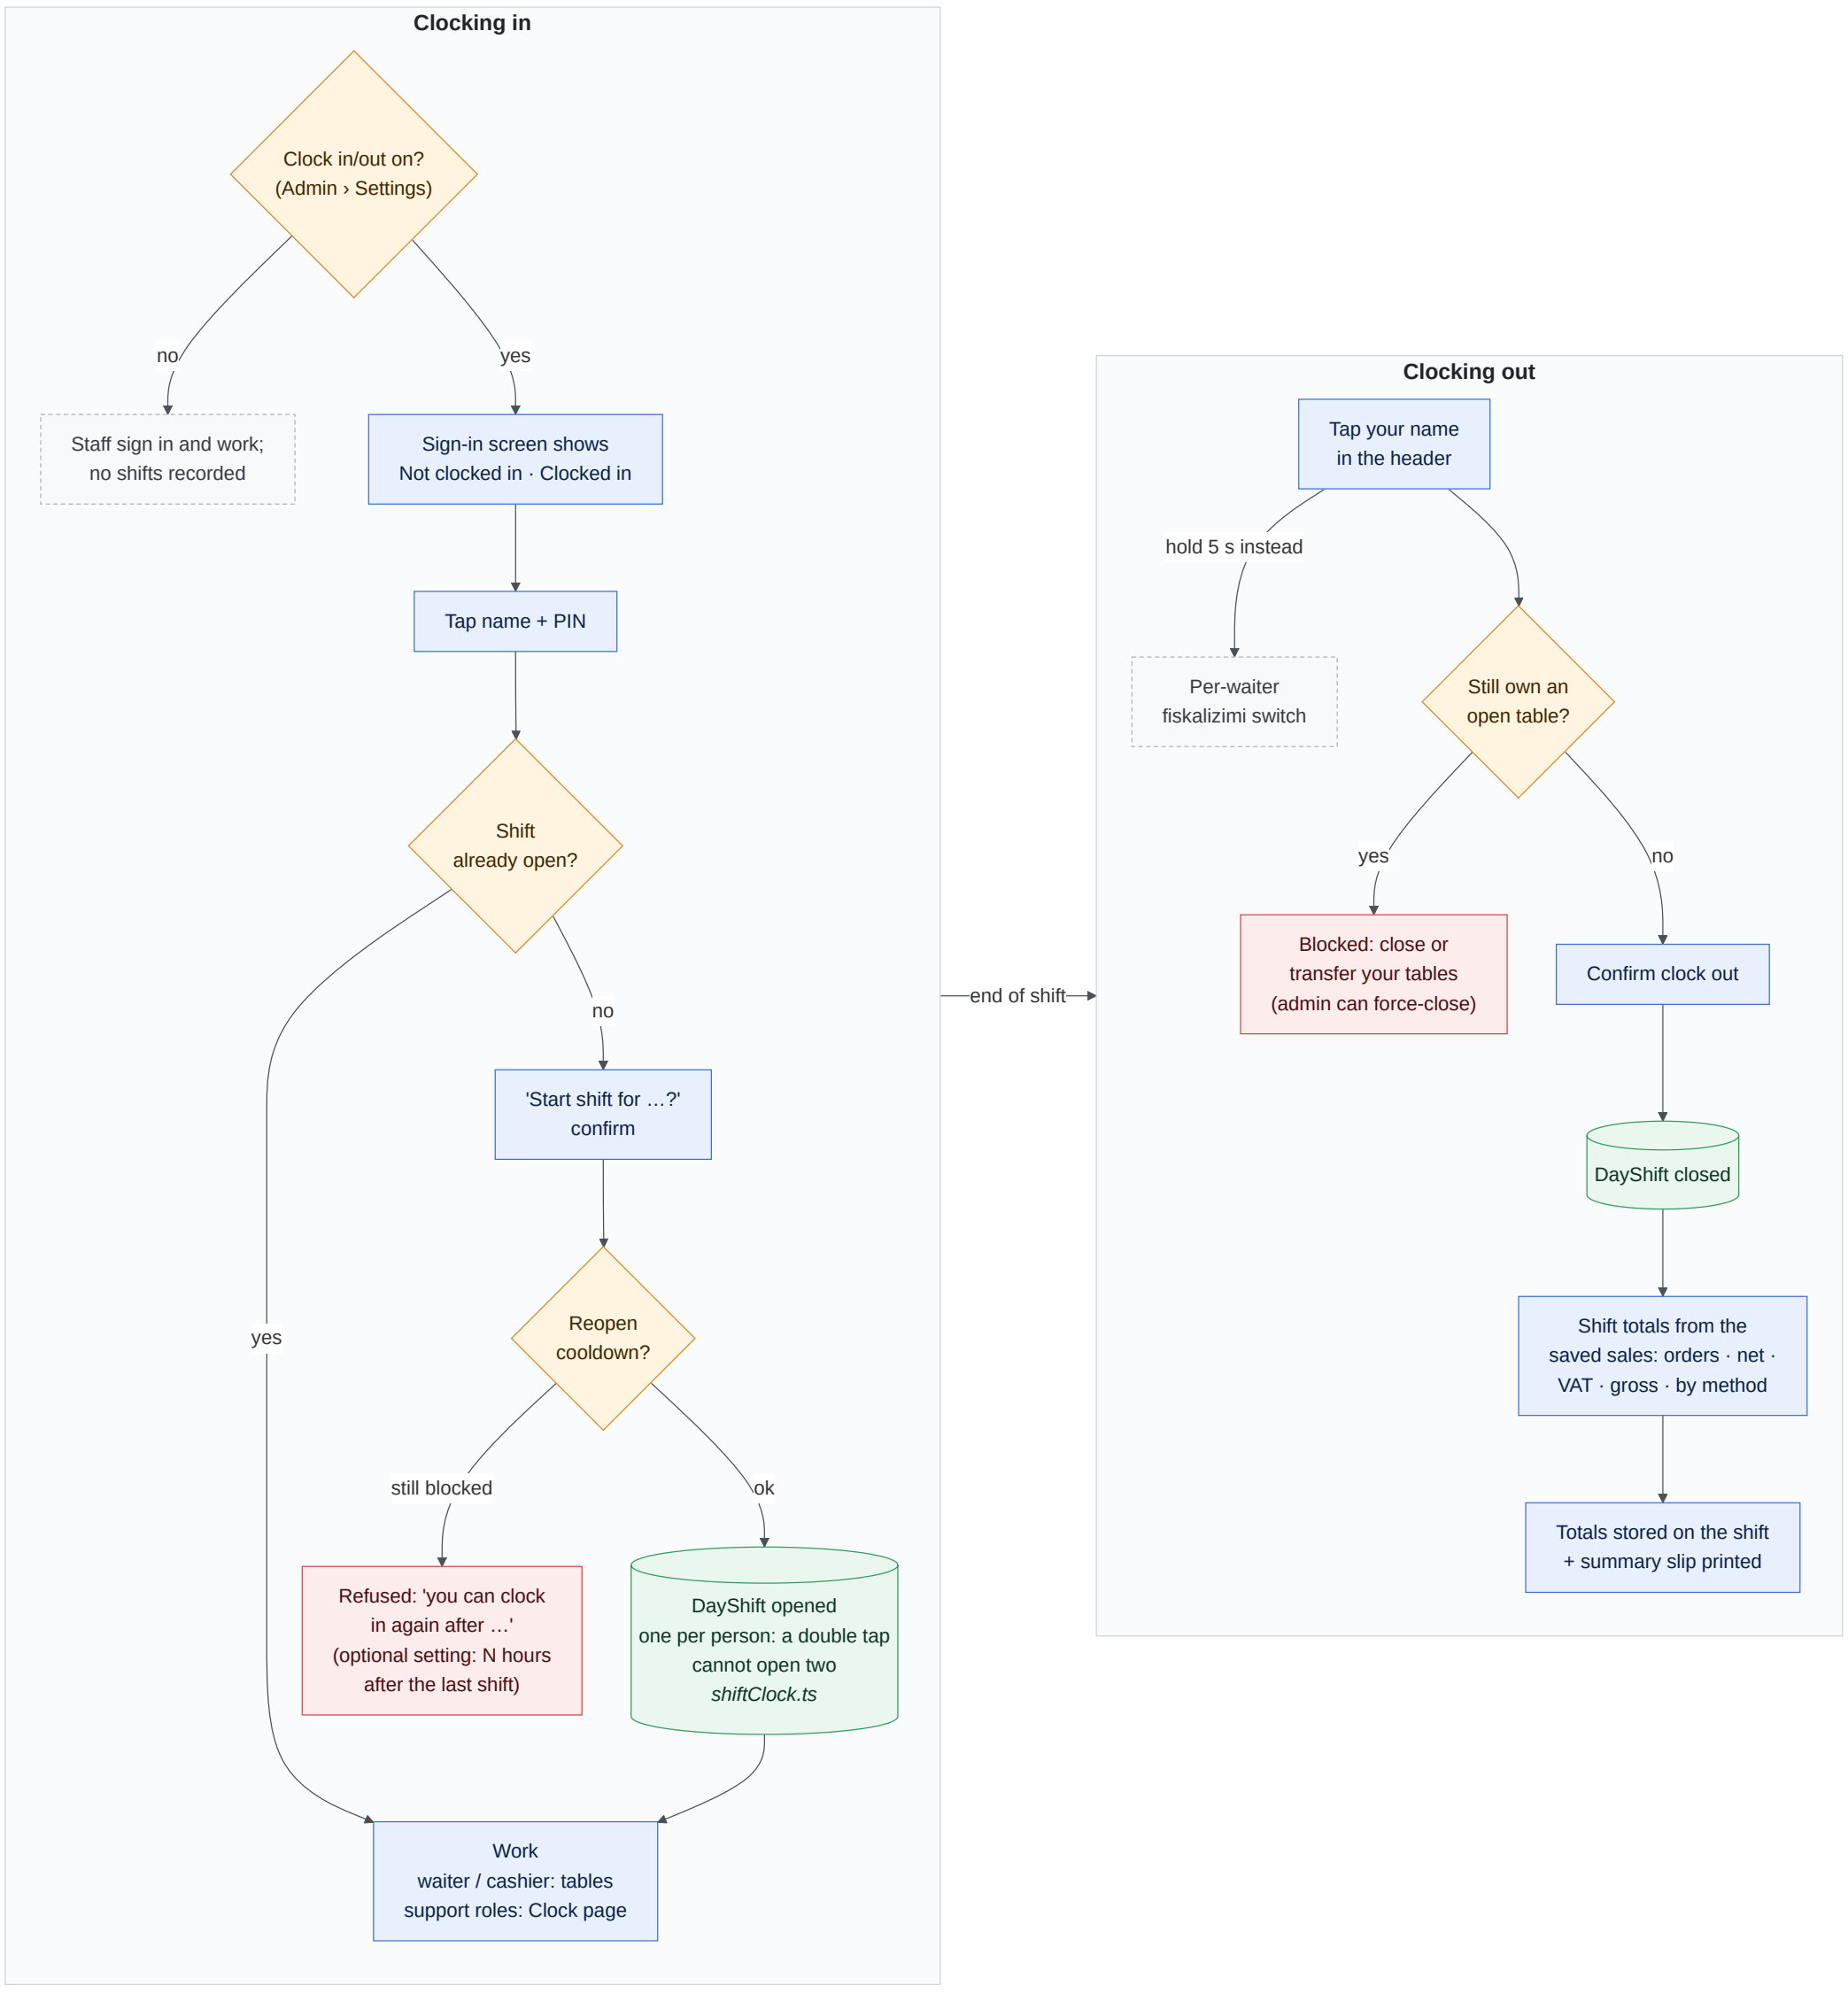



7 · Reports: which screen reads what

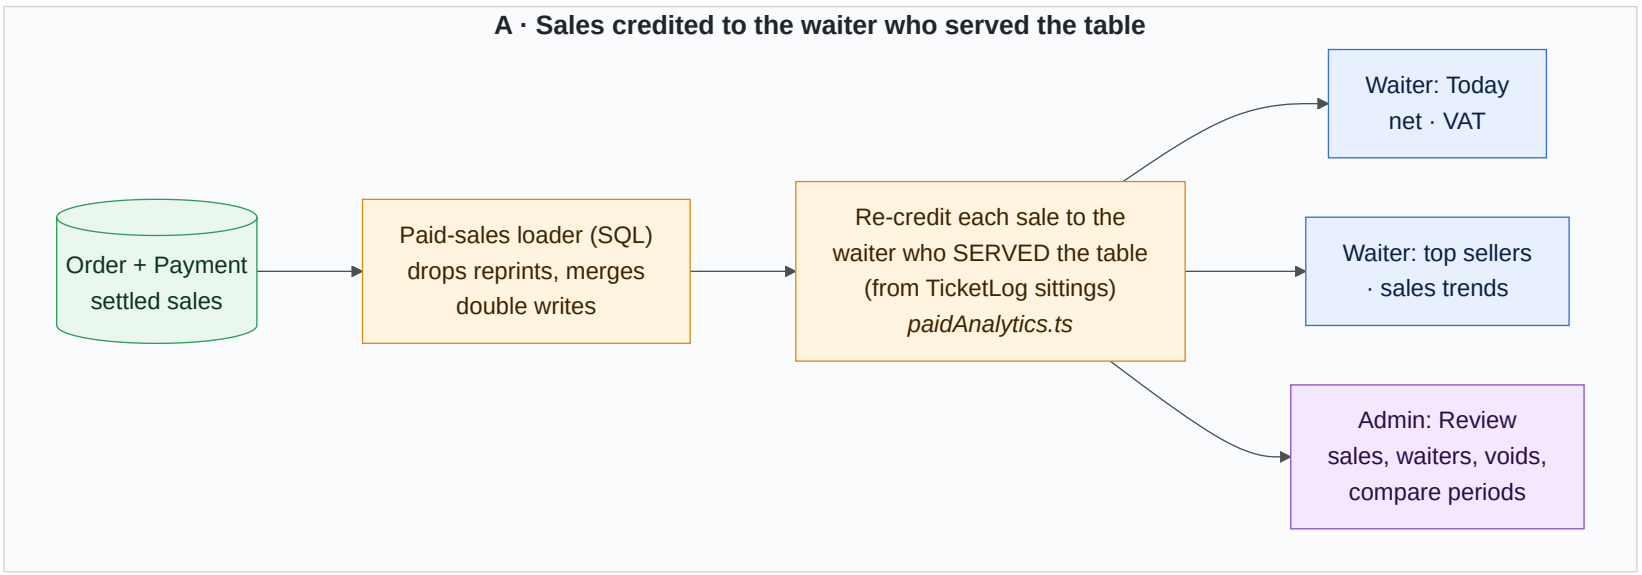

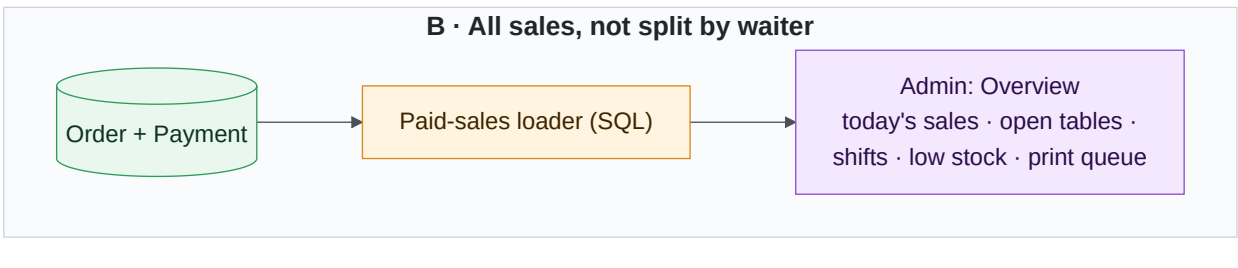

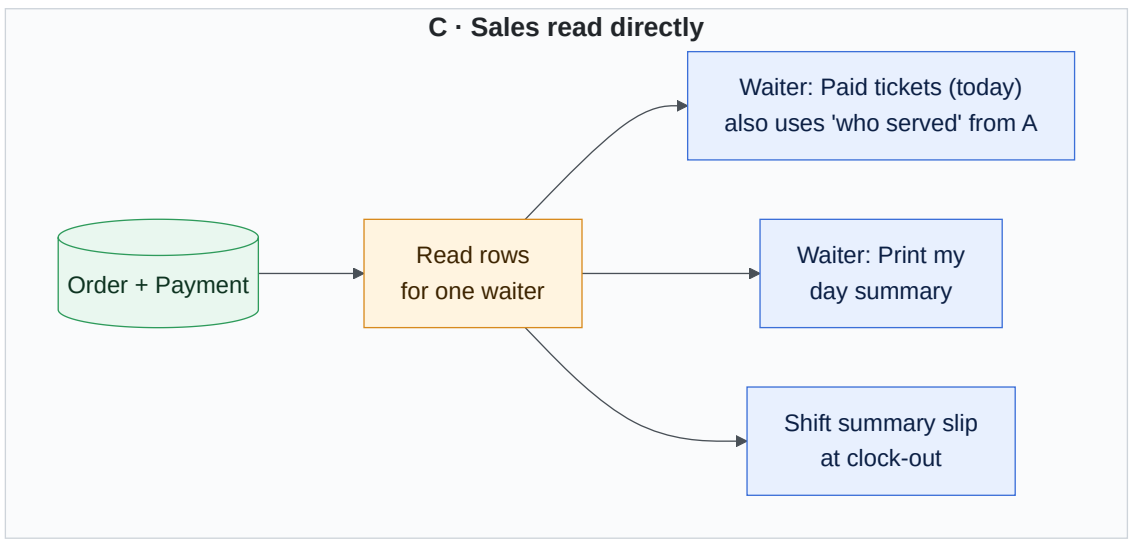

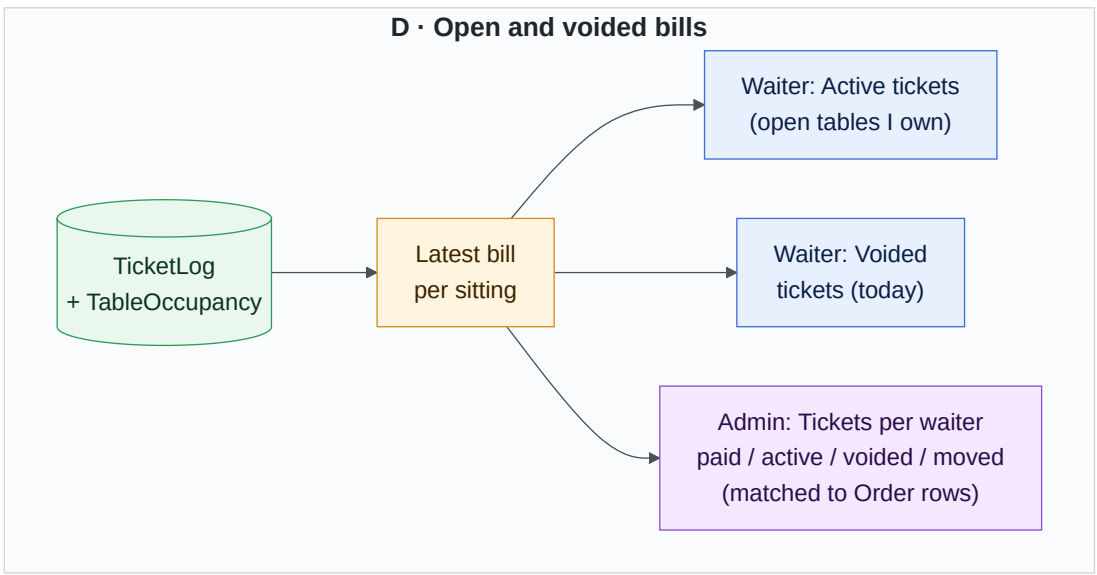

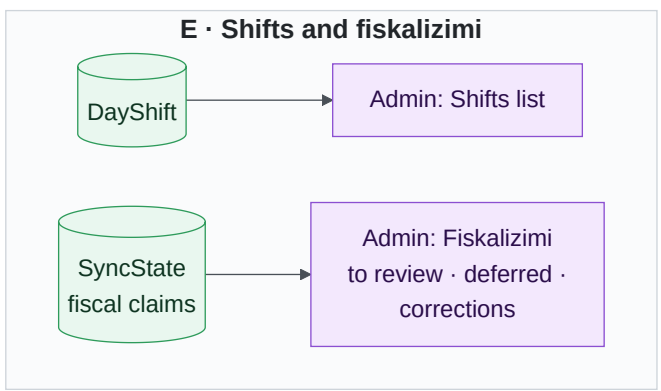

Why totals and lists can disagree: today's totals (row A) and the paid list (row C) use different queries. The paid and voided lists used to turn a failed read into an empty list ('Paid 0') with no error; they now show the error.

8 · Live updates & offline

