

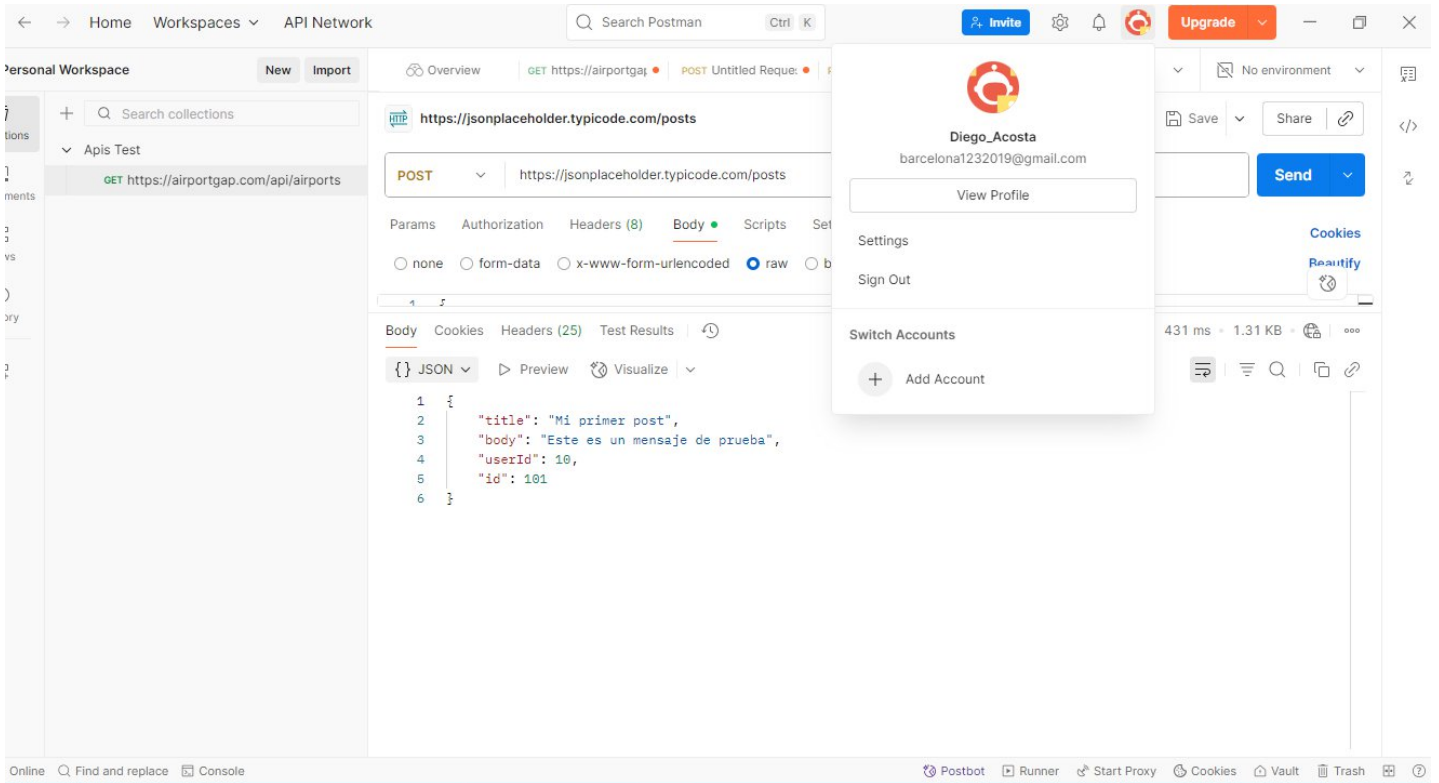


# HERRAMIENTA POSTMAN

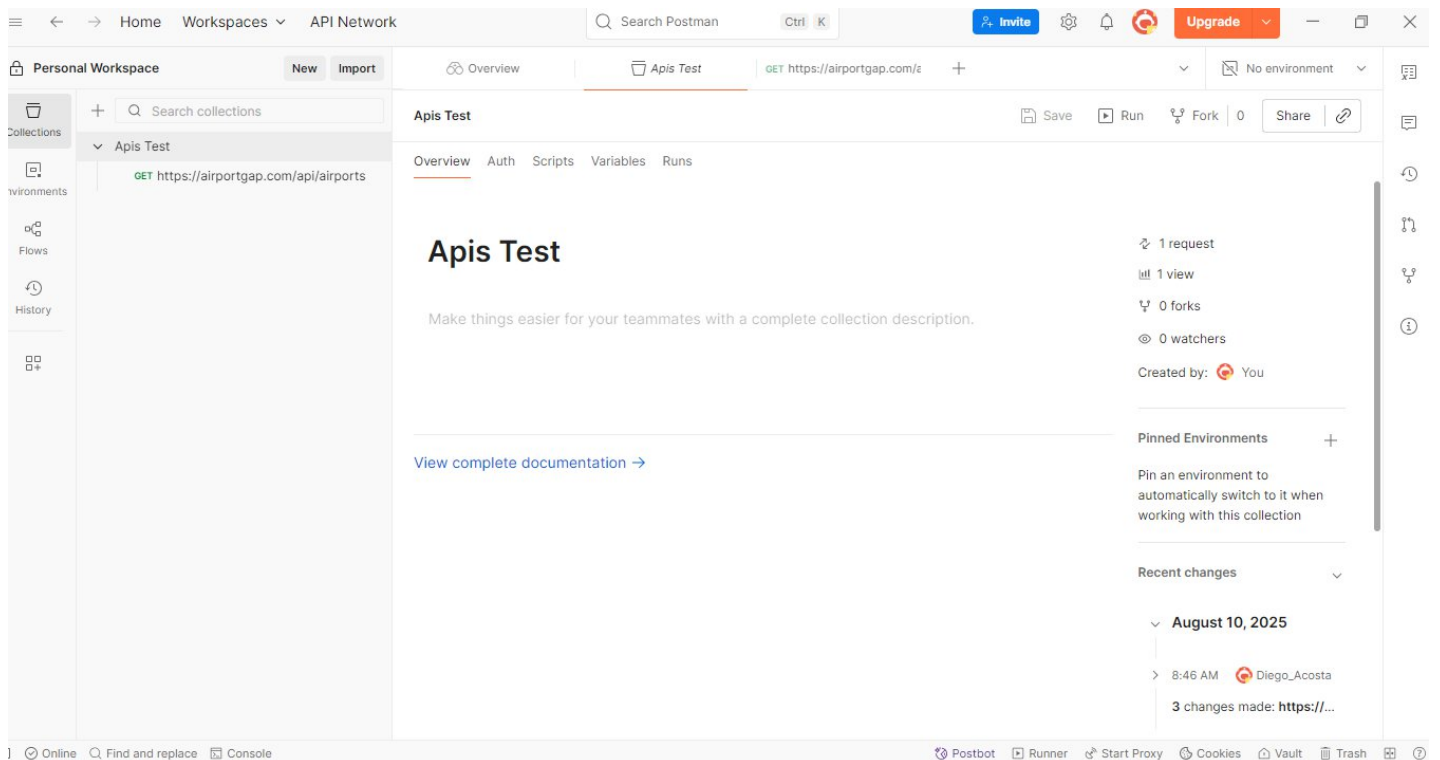

# PRUEBA GET

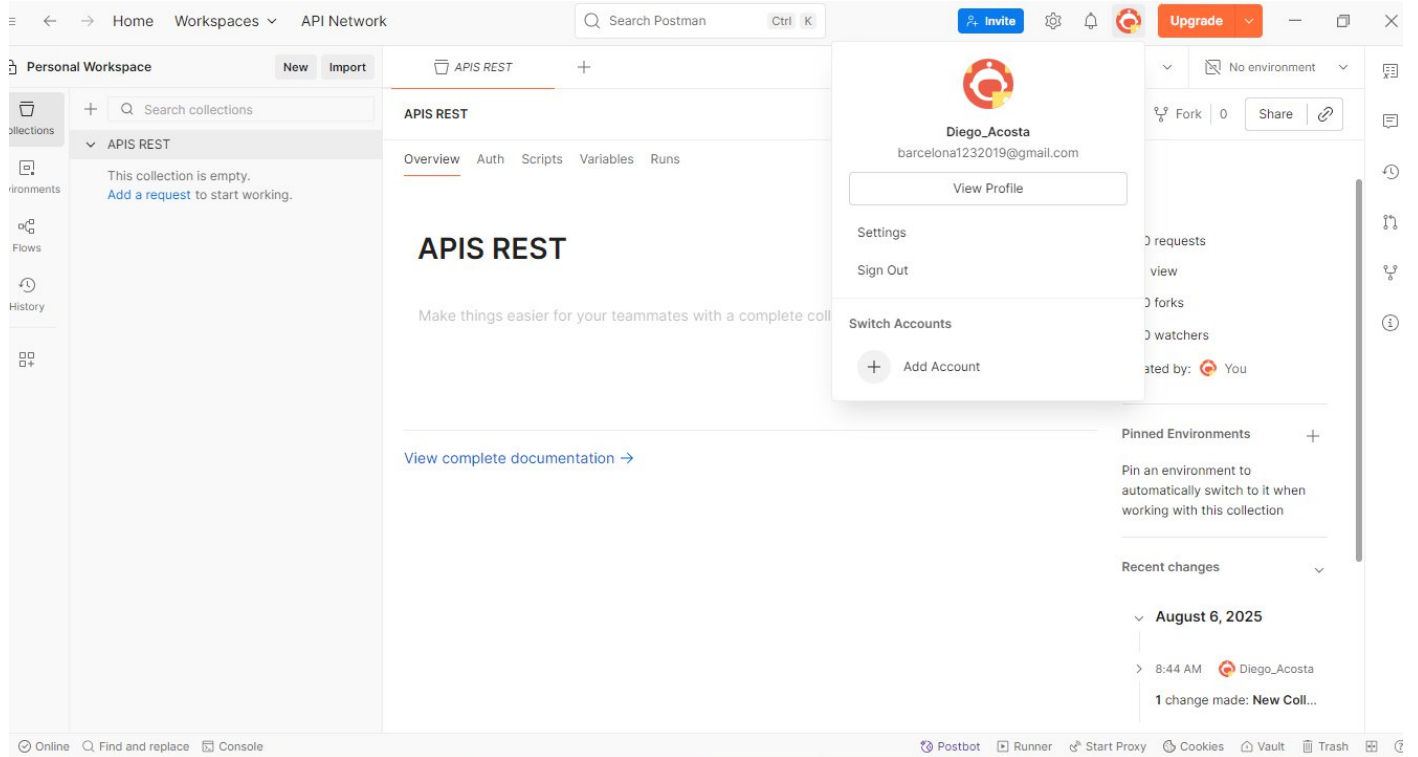

Postman interface showing a GET request to `https://airportgap.com/api/airports`. The response is a JSON array with one object representing an airport.

**Query Params**

Key	Value	Description
Key	Value	Description

**Body**

```
{
  "data": [
    {
      "id": "GKA",
      "type": "airport",
      "attributes": {
        "name": "Goroka Airport",
        "city": "Goroka",
        "country": "Papua New Guinea",
        "iata": "GKA",
        "icao": "AYGA",
        "latitude": "-6.08169",
        "longitude": "146.391998",
        "altitude": 5282,
        "timezone": "Pacific/Port_Moresby"
      }
    }
  ]
}
```

200 OK - 601 ms - 2.24 KB

## PRUEBA DE POST

Postman interface showing a POST request to `https://jsonplaceholder.typicode.com/posts`. The response is a 201 Created status.

**Query Params**

Key	Value	Description
Key	Value	Description

201 Created - 431 ms - 1.31 KB

