HTML FROM ZERO

A Complete Beginner Handbook

Learn the idea • Read working HTML • See real browser output

Based on your supplied study-note reference, extended with concepts actually used in your seven HTML learning projects. Original examples and an expanded learning sequence.

Includes runnable .html lesson files + local assets

Contents and learning path

Every lesson includes purpose, key concepts, code, a captured Chromium browser output, and a practical explanation. Screenshots reflect code as rendered; native controls vary slightly by browser.

01. HTML, CSS and JavaScript

02. The complete HTML document

03. Elements, tags and attributes

04. Headings and paragraphs

05. Text emphasis and formatting

06. Quotes, abbreviations and code

07. HTML entities and special characters

08. Unordered, ordered and description lists

09. Links and external navigation

10. Same-page navigation and IDs

11. Linking two files and downloading

12. Images and alternative text

13. Figures and captions

14. Tables: rows, headings and cells

15. Tables: thead, tbody, tfoot

16. Tables: rowspan and colspan

17. Forms, labels and text fields

18. Password, date, time and number inputs

19. Radio buttons and checkboxes

20. Dropdowns and multiple-line text

21. Files, URLs and slider inputs

22. Validation, submission and buttons

23. Semantic page structure

24. div, span, block and inline

25. details and summary: built-in disclosure

26. Metadata: title, description and viewport

27. Canonical URLs, Open Graph and link tags

28. Audio, video and iframe basics

29. Accessible HTML and common mistakes

30. Mini-project: movie landing page

31. Mini-project: result statement

32. Mini-project: application portal

Suggested study order: first complete lessons 1–16, then forms 17–23, then semantic/web publishing topics, then the final mini-projects.

01 HTML, CSS and JavaScript

Why learn this? HTML gives meaning and structure. CSS controls appearance. JavaScript adds behavior.

HTML is not a programming language; it is a markup language. A browser reads HTML and constructs a document.

WORKING HTML CODE

```
<h1>My first website</h1>
<p>HTML creates the content.</p>
<p style="color: #087e8b">CSS changes its appearance.</p>
<button type="button">A button (no action yet)</button>
```

ACTUAL BROWSER OUTPUT



How the output works: The browser shows a heading, two paragraphs and a button. Without JavaScript or form behavior, clicking the button does nothing.

Connection to your projects: All seven projects use HTML; several apply inline CSS.

Practice: Open `lesson-01.html`, change one value or tag, save and refresh the browser.

02 The complete HTML document


Why learn this? Start with a proper document skeleton in every .html file.

DOCTYPE triggers modern standards mode; html lang gives language; head holds metadata and body holds visible content.

WORKING HTML CODE

```
<!doctype html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <title>My First Page</title>
</head>
<body>
  <h1>Welcome!</h1>
  <p>My first complete document.</p>
</body>
</html>
```

ACTUAL BROWSER OUTPUT



How the output works: The tab title is My First Page; only the h1 and paragraph appear in the document area.

Connection to your projects: Every project has a page skeleton.

Beginner tip: Always save files using the .html extension.

Practice: Open `lesson-02.html`, change one value or tag, save and refresh the browser.

03 Elements, tags and attributes

Why learn this? An element is made using tags, content and optional attributes.

Opening: ; closing: ; attribute examples: id, class, title, style, href, src, alt.

WORKING HTML CODE

```
<h2 title="This is a tooltip">Hover over me</h2>
<p id="intro" class="description">A paragraph with attributes.</p>
<p style="color: seagreen">Inline CSS creates green text.</p>
```

ACTUAL BROWSER OUTPUT



How the output works: Hovering the heading may show its title hint. The id and class are not visible by themselves.

Connection to your projects: All seven projects use attributes such as style, href and id.

Practice: Open `lesson-03.html`, change one value or tag, save and refresh the browser.

04 Headings and paragraphs


Why learn this? Use headings for document hierarchy rather than just font size.

h1 is main topic; h2 subsection; h3 sub-subsection; p is a paragraph; br makes line break; hr makes thematic break.

WORKING HTML CODE

```
<h1>Technology Today</h1>
<h2>Artificial Intelligence</h2>
<p>AI is changing how we learn.</p>
<hr>
<h3>Example</h3>
<p>Line one<br>Line two</p>
```

ACTUAL BROWSER OUTPUT

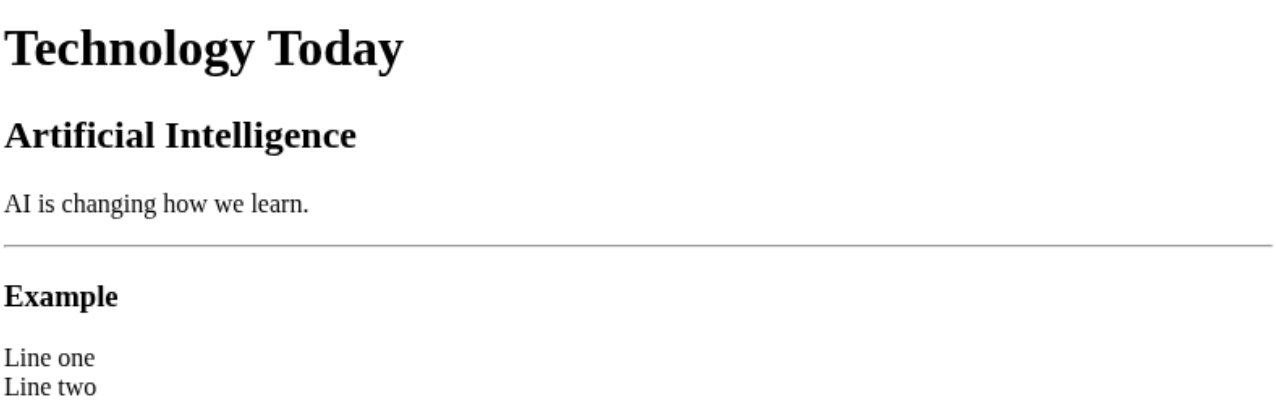

How the output works: The heading levels differ in size by browser default. hr creates a divider; br starts another line.

Connection to your projects: TechVisionNews and Structural use article headings.

Practice: Open `lesson-04.html`, change one value or tag, save and refresh the browser.

05 Text emphasis and formatting

Why learn this? Use formatting tags to give words clear meaning.

strong = importance; em = emphasis; mark = highlight; small = side note; del = deletion; ins = insertion; sup and sub = superscript/subscript.

WORKING HTML CODE

```
<p><strong>Important:</strong> Submit today.</p>
<p>This is <em>emphasized</em> and <mark>highlighted</mark>.</p>
<p>Offer: <del>Rs 500</del> <ins>Rs 399</ins></p>
<p>H<sub>2</sub>O and x<sup>2</sup></p>
<small>Terms and conditions apply.</small>
```

ACTUAL BROWSER OUTPUT

Important: Submit today.

This is *emphasized* and highlighted.

Offer: ~~Rs 500~~ Rs 399

H_2O and x^2

<small>Terms and conditions apply.</small>

How the output works: Important usually appears bold; emphasis italic; mark highlighted. Sup and sub shift text vertically.

Connection to your projects: Resume highlights data science; CineWorld includes promotional content.

Practice: Open `lesson-05.html`, change one value or tag, save and refresh the browser.

06 Quotes, abbreviations and code


Why learn this? Use meaningful elements for definitions, quotations and technical text.

abbr provides an expanded title; q is an inline quote; blockquote for longer quotations; code is computer code; kbd is a key.

WORKING HTML CODE

```
<p><abbr title="HyperText Markup Language">HTML</abbr> is useful.</p>
<p>Teacher said <q>Practice every day</q>.</p>
<blockquote>Good structure improves readability.</blockquote>
<p>Write <code>&lt;p&gt;</code>. Press <kbd>Ctrl</kbd> + <kbd>S</kbd>.</p>
```

ACTUAL BROWSER OUTPUT

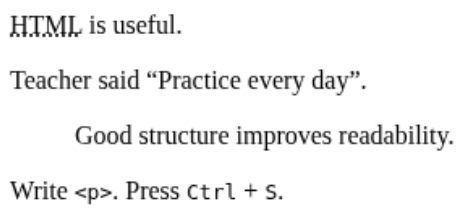

How the output works: q displays quotation marks in most browsers; code and keyboard tags have a monospaced appearance.

Connection to your projects: TechVisionNews uses formatted editorial text.

Practice: Open `lesson-06.html`, change one value or tag, save and refresh the browser.

07 HTML entities and special characters

Why learn this? Some characters must be written using entities to be displayed literally.

< represents <; > represents >; & represents &; © represents copyright;   is a nonbreaking space.

WORKING HTML CODE

```
<p>Write &lt;h1&gt; for a main heading.</p>
<p>Fish &amp; Chips</p>
<p>&copy; 2026 Learning Notes</p>
<p>Price: &#8377;299</p>
```

ACTUAL BROWSER OUTPUT

Write <h1> for a main heading.

Fish & Chips

© 2026 Learning Notes

Price: ₹299

How the output works: The page displays literal angle brackets, an ampersand, a copyright symbol and a rupee sign.

Connection to your projects: CineWorld, Proform and Structural use copyright footers.

Practice: Open `lesson-07.html`, change one value or tag, save and refresh the browser.

08 Unordered, ordered and description lists

Why learn this? Lists make repeated information easier to read.

ul = bullets, ol = numbered sequence, li = list item, dl = definition list, dt = term, dd = description.

WORKING HTML CODE

```
<h3>Skills</h3>
<ul><li>HTML</li><li>CSS</li><li>Python</li></ul>
<h3>Steps</h3>
<ol><li>Write code</li><li>Save file</li><li>Open browser</li></ol>
<dl><dt>HTML</dt><dd>Page structure</dd></dl>
```

ACTUAL BROWSER OUTPUT

Skills

- HTML
- CSS
- Python

Steps

1. Write code
2. Save file
3. Open browser

HTML
: Page structure

How the output works: The browser shows bullet points, numbered steps and an indented definition.

Connection to your projects: TechNova uses a services list; Resume includes profile information.

Practice: Open `lesson-08.html`, change one value or tag, save and refresh the browser.

09 Links and external navigation

Why learn this? The anchor element creates hyperlinks to other resources.

href is link destination; target=_blank opens a new tab; rel=noopener is a safe external-link practice.

WORKING HTML CODE

```
<p><a href="https://example.com">Visit a website</a></p>
<p><a href="https://example.com" target="_blank" rel="noopener">Open new tab</a></p>
<p><a href="mailto:hello@example.com">Send email</a></p>
<p><a href="tel:+911234567890">Call phone</a></p>
```

ACTUAL BROWSER OUTPUT

Visit a website

Open new tab

Send email

Call phone

How the output works: Four underlined links appear. Their actions depend on network, browser and device support.

Connection to your projects: TechNova has an external website link; Resume has connect links.

Practice: Open `lesson-09.html`, change one value or tag, save and refresh the browser.

10 Same-page navigation and IDs

Why learn this? Use an #id fragment to jump to a section in the same document.

A fragment link href=#contact matches an element with id=contact. IDs must be unique.

WORKING HTML CODE

```
<nav>
  <a href="#about">About</a> |
  <a href="#contact">Contact</a>
</nav>
<section id="about"><h2>About</h2><p>Learning HTML.</p></section>
<section id="contact"><h2>Contact</h2><p>Email us.</p></section>
```

ACTUAL BROWSER OUTPUT



How the output works: Clicking About or Contact navigates to the matching section (may barely scroll on a short page).

Connection to your projects: Proform and Structural use navigation menus and section anchors.

Practice: Open `lesson-10.html`, change one value or tag, save and refresh the browser.

11 Linking two files and downloading

Why learn this? Links can point to files in the same folder, another folder or a download.

Relative paths are resolved from the current document. download suggests saving a same-origin file; it does not create that file.

WORKING HTML CODE

```
<p><a href="about.html">Open the About page</a></p>
<p><a href="notes.txt" download>Download a text note</a></p>
<p><a href="../index.html">Go to parent folder index</a></p>
```

ACTUAL BROWSER OUTPUT

Open the About page

Download a text note

Go to parent folder index

How the output works: The browser displays three links. In the companion files, about.html and notes.txt exist; parent link works only if that file exists.

Connection to your projects: Resume and other projects include resource links.

Beginner tip: Use ./image.jpg for same-folder assets and ../ for the parent directory.

Practice: Open `lesson-11.html`, change one value or tag, save and refresh the browser.

12 Images and alternative text

Why learn this? Show pictures using the img element; describe meaningful images with alt.

src specifies a URL/path. width and height reserve dimensions. alt is for accessibility or when images fail.

WORKING HTML CODE

```
<h3>A simple illustration</h3>
<img src="sample.svg" alt="Blue mountain beneath a sun" width="280">
<p>Image is stored locally as sample.svg.</p>
```

ACTUAL BROWSER OUTPUT

A simple illustration



Image is stored locally as sample.svg.

How the output works: The image displays a simple landscape illustration; its alt text provides an alternative description.

Connection to your projects: Resume includes an image file; CineWorld displays visual entertainment content.

Practice: Open `lesson-12.html`, change one value or tag, save and refresh the browser.

13 Figures and captions

Why learn this? Use figure + figcaption when an illustration needs a caption.

figure represents self-contained content; figcaption provides its label.

WORKING HTML CODE

```
<figure>
  <img src="sample.svg" alt="Blue mountains" width="260">
  <figcaption>Figure 1. A mountain illustration.</figcaption>
</figure>
```

ACTUAL BROWSER OUTPUT



Figure 1. A mountain illustration.

How the output works: An illustration appears with a caption below it.

Connection to your projects: Structural discusses figure and figcaption.

Practice: Open `lesson-13.html`, change one value or tag, save and refresh the browser.

14 Tables: rows, headings and cells

Why learn this? Use tables for facts arranged by rows and columns, not for whole-page layout.

table contains tr rows; th is a header cell; td is data cell; caption names a table.

WORKING HTML CODE

```
<table border="1" cellpadding="7">
 <caption>Student Scores</caption>
 <tr><th>Subject</th><th>Marks</th></tr>
 <tr><td>HTML</td><td>92</td></tr>
 <tr><td>Python</td><td>85</td></tr>
</table>
```

ACTUAL BROWSER OUTPUT

Student Scores

Subject	Marks
HTML	92
Python	85

How the output works: A two-column table displays subject names and marks.

Connection to your projects: Result project uses a detailed semester marks table.

Practice: Open `lesson-14.html`, change one value or tag, save and refresh the browser.

15 Tables: thead, tbody, tfoot

Why learn this? Group table header, body and summary semantically.

thead groups headings; tbody groups regular rows; tfoot groups totals.

WORKING HTML CODE

```
<table border="1" cellpadding="7">
 <thead><tr><th>Item</th><th>Cost</th></tr></thead>
 <tbody>
  <tr><td>Domain</td><td>500</td></tr>
  <tr><td>Hosting</td><td>700</td></tr>
 </tbody>
 <tfoot><tr><th>Total</th><th>1200</th></tr></tfoot>
</table>
```

ACTUAL BROWSER OUTPUT

Item	Cost
Domain	500
Hosting	700
Total	**1200**

How the output works: A header row, two items and a total row are shown.

Connection to your projects: CineWorld has subscription tables; TechNova includes package pricing.

Practice: Open `lesson-15.html`, change one value or tag, save and refresh the browser.

16 Tables: rowspan and colspan

Why learn this? Merge table cells horizontally or vertically when representing grouped data.

colspan=2 takes two columns; rowspan=2 spans two rows. The table grid must remain consistent.

WORKING HTML CODE

```
<table border="1" cellpadding="8">
 <tr><th colspan="3">Semester Summary</th></tr>
 <tr><th>Term</th><th>Subject</th><th>Grade</th></tr>
 <tr><td rowspan="2">5</td><td>OS</td><td>A</td></tr>
 <tr><td>DBMS</td><td>B</td></tr>
</table>
```

ACTUAL BROWSER OUTPUT

Semester Summary		
Term	**Subject**	**Grade**
5	OS	A
	DBMS	B

How the output works: The title spans all three columns and the term number spans two rows.

Connection to your projects: Result and pricing-focused projects practice table layout.

Practice: Open `lesson-16.html`, change one value or tag, save and refresh the browser.

17 Forms, labels and text fields

Why learn this? Forms collect user input; labels explain fields.

form wraps controls; label for matches input id; name identifies submitted field; required requests nonempty input.

WORKING HTML CODE

```
<form>
 <label for="fullName">Full name:</label><br>
 <input id="fullName" name="fullName" type="text" placeholder="Enter your name"
required><br><br>
 <label for="email">Email:</label><br>
 <input id="email" name="email" type="email" required><br><br>
 <button type="button">Demo only</button>
</form>
```

ACTUAL BROWSER OUTPUT



How the output works: Two text fields and a demo button appear. No backend submission is implemented.

Connection to your projects: Proform contains account registration and login forms.

Practice: Open `lesson-17.html`, change one value or tag, save and refresh the browser.

18 Password, date, time and number inputs

Why learn this? Input type changes the native browser control.

password masks characters; number offers numeric entry; date/time use browser pickers.

WORKING HTML CODE

```
<form>
 <label>Password: <input type="password" minlength="6"></label><br><br>
 <label>Age: <input type="number" min="1" max="120"></label><br><br>
 <label>Date: <input type="date"></label><br><br>
 <label>Time: <input type="time"></label>
</form>
```

ACTUAL BROWSER OUTPUT



How the output works: Password, number, date and time controls render using the browser’s native UI.

Connection to your projects: Proform uses password, date-of-birth and interview-time fields.

Practice: Open `lesson-18.html`, change one value or tag, save and refresh the browser.

19 Radio buttons and checkboxes

Why learn this? Radio = choose one from a named group; checkbox = independent on/off.

Radio controls with the same name form a choice group. Checkbox can mark multiple selections.

WORKING HTML CODE

```
<fieldset>
 <legend>Preferred plan</legend>
 <label><input type="radio" name="plan" checked> Basic</label>
 <label><input type="radio" name="plan"> Premium</label>
</fieldset>
<p><label><input type="checkbox" checked> HTML</label>
<label><input type="checkbox"> CSS</label></p>
```

ACTUAL BROWSER OUTPUT



How the output works: Only one plan can be selected. HTML and CSS checkboxes can be toggled independently.

Connection to your projects: CineWorld lists subscription plans; Proform has a remember-me checkbox.

Practice: Open `lesson-19.html`, change one value or tag, save and refresh the browser.

20 Dropdowns and multiple-line text


Why learn this? select provides options; textarea supports longer typed messages.

option is a choice within select; textarea rows/cols hint at visible size.

WORKING HTML CODE

```
<label for="role">Role:</label>
<select id="role" name="role">
 <option value="frontend">Frontend</option>
 <option value="analyst">Data Analyst</option>
 <option value="ml">ML Engineer</option>
</select>
<p><label for="feedback">Feedback:</label></p>
<textarea id="feedback" rows="3" cols="36" placeholder="Write feedback here"></textarea>
```

ACTUAL BROWSER OUTPUT

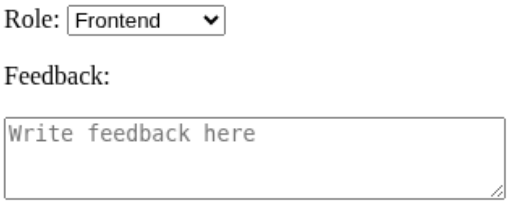

How the output works: A dropdown and a larger editable textbox appear.

Connection to your projects: Proform includes dropdowns and a feedback form.

Practice: Open `lesson-20.html`, change one value or tag, save and refresh the browser.

21 Files, URLs and slider inputs


Why learn this? Special form controls allow file selection, websites and ranges.

file only selects a local file; accept filters the file-picker choices. range represents a value within bounds.

WORKING HTML CODE

```
<form>
 <label>Resume: <input type="file" accept=".pdf,.doc,.docx"></label><br><br>
 <label>Portfolio: <input type="url" placeholder="https://example.com"></label><br><br>
 <label>Rating: <input type="range" min="1" max="10" value="6"></label>
</form>
```

ACTUAL BROWSER OUTPUT

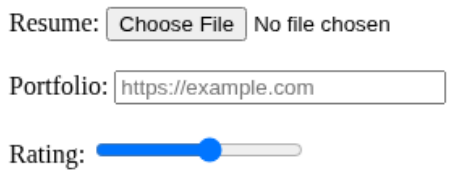

How the output works: Browser displays a file picker, URL field and slider. Files are not uploaded without a processing endpoint.

Connection to your projects: Proform contains photo upload, portfolio, and feedback controls.

Practice: Open `lesson-21.html`, change one value or tag, save and refresh the browser.

22 Validation, submission and buttons

Why learn this? HTML can perform basic input checks before submitting a form.

required, minlength, maxlength, min, max and pattern support client validation. type=submit sends; type=reset clears form.

WORKING HTML CODE

```
<form onsubmit="event.preventDefault(); alert('Demo only: no server connected');">
 <label>Username: <input name="user" required minlength="3" maxlength="12"
></label><br><br>
 <label>Score: <input type="number" min="0" max="100" required></label><br><br>
 <button type="submit">Check & Submit</button>
 <button type="reset">Reset</button>
</form>
```

ACTUAL BROWSER OUTPUT

Username:

Score:

Check & Submit Reset

How the output works: When submitted, browser validates entries. This self-contained demonstration stops real submission and shows a message.

Connection to your projects: Proform includes several forms; realistic processing would require a backend.

Beginner tip: HTML validation helps the user but does not replace server-side validation.

Practice: Open `lesson-22.html`, change one value or tag, save and refresh the browser.

23 Semantic page structure


Why learn this? Semantic tags describe what each region of the page means.

header, nav, main, section, article, aside and footer are meaningful containers.

WORKING HTML CODE

```
<header><h2>HTML Hub</h2></header>
<nav><a href="#story">Read article</a></nav>
<main>
 <article id="story"><h3>Why learn HTML?</h3><p>It structures content.</p></article>
 <aside><p>Tip: practice by building small pages.</p></aside>
</main>
<footer><small>End of page</small></footer>
```

ACTUAL BROWSER OUTPUT

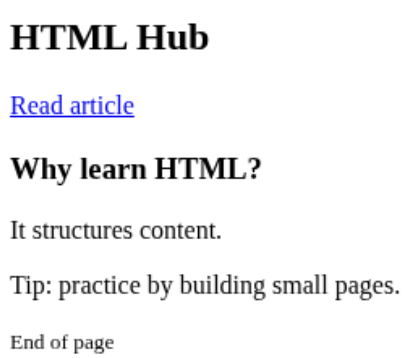

How the output works: A heading, link, article, tip and footer appear in order.

Connection to your projects: Structural is specifically focused on semantic HTML; TechVisionNews uses editorial structure.

Practice: Open `lesson-23.html`, change one value or tag, save and refresh the browser.

24 div, span, block and inline


Why learn this? Use general containers when there is no more meaningful semantic element.

div is usually block-level; span usually inline. CSS can change display behavior.

WORKING HTML CODE

```
<div style="background:#e6f2ff;padding:10px">
 <h3>Notice</h3>
 <p>This is a <span style="color:crimson">special</span> message.</p>
</div>
<div>Another block starts below.</div>
```

ACTUAL BROWSER OUTPUT

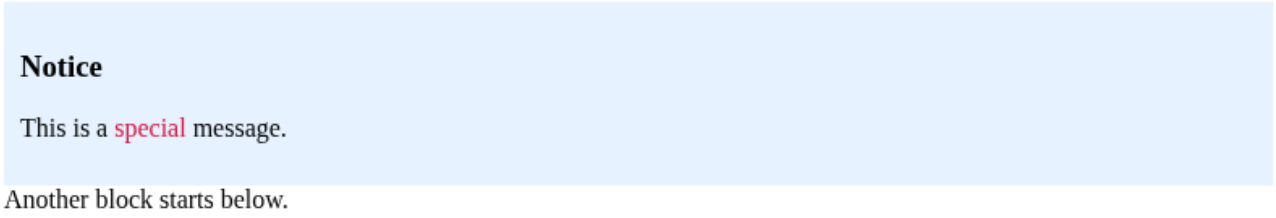

Another block starts below.

How the output works: The div creates a colored region. span styles one word without starting a new line.

Connection to your projects: CineWorld and TechNova use grouping and inline styling.

Practice: Open `lesson-24.html`, change one value or tag, save and refresh the browser.

25 details and summary: built-in disclosure


Why learn this? Create a show/hide section with HTML alone.

details toggles open/closed; summary is the clickable label.

WORKING HTML CODE

```
<details>
 <summary>What is semantic HTML?</summary>
 <p>HTML tags that express the meaning of content.</p>
</details>
<details open>
 <summary>Example</summary>
 <p>Article is for self-contained content.</p>
</details>
```

ACTUAL BROWSER OUTPUT



How the output works: First disclosure starts closed; second begins expanded. Click each summary to toggle.

Connection to your projects: A useful extra practice concept for article or FAQ pages.

Practice: Open `lesson-25.html`, change one value or tag, save and refresh the browser.

26 Metadata: title, description and viewport

Why learn this? Metadata belongs in head and helps browsers and search engines interpret the page.

title names tab; description can be used in search snippets; viewport aids mobile presentation; robots gives crawl directives.

WORKING HTML CODE

```
<!doctype html>
<html lang="en"><head>
 <meta charset="UTF-8">
 <meta name="viewport" content="width=device-width,initial-scale=1">
 <meta name="description" content="Beginner HTML practice notes">
 <meta name="robots" content="index,follow">
 <meta name="theme-color" content="#123456">
 <title>Metadata Demo</title>
</head><body><h2>Metadata demo</h2>
<p>Metadata usually is not visible in the page body.</p>
</body></html>
```

ACTUAL BROWSER OUTPUT



How the output works: Tab title changes to Metadata Demo; meta tags do not add visible body content.

Connection to your projects: All projects have head metadata and titles, although some use a generic title.

Practice: Open `lesson-26.html`, change one value or tag, save and refresh the browser.

27 Canonical URLs, Open Graph and link tags

Why learn this? A published site can describe its preferred URL and sharing preview.

canonical link identifies preferred URL; og:title, og:description and og:image inform many social previews; preconnect is a performance hint.

WORKING HTML CODE

```
<head>
 <title>Example Article</title>
 <link rel="canonical" href="https://example.com/article">
 <meta property="og:title" content="Example Article">
 <meta property="og:description" content="An HTML tutorial">
 <meta property="og:type" content="article">
 <meta property="og:url" content="https://example.com/article">
 <link rel="preconnect" href="https://fonts.googleapis.com">
</head>
<body><h2>Sharing metadata</h2><p>See page source for the tags.</p></body>
```

ACTUAL BROWSER OUTPUT



How the output works: Heading and paragraph appear; sharing metadata is not directly visible inside the page. Replace example URLs when publishing.

Connection to your projects: Extension beyond projects, useful when publishing HTML websites.

Practice: Open `lesson-27.html`, change one value or tag, save and refresh the browser.

28 Audio, video and iframe basics


Why learn this? HTML can embed media and external content.

audio and video can provide native controls; iframe embeds another page, subject to the external site allowing it.

WORKING HTML CODE

```
<h3>Media elements</h3>
<p>Audio (requires a real audio file):</p>
<audio controls><source src="sample-audio.mp3" type="audio/mpeg"></audio>
<p>Video (requires a real video file):</p>
<video controls width="260"><source src="sample-video.mp4" type="video/mp4"></video>
```

ACTUAL BROWSER OUTPUT

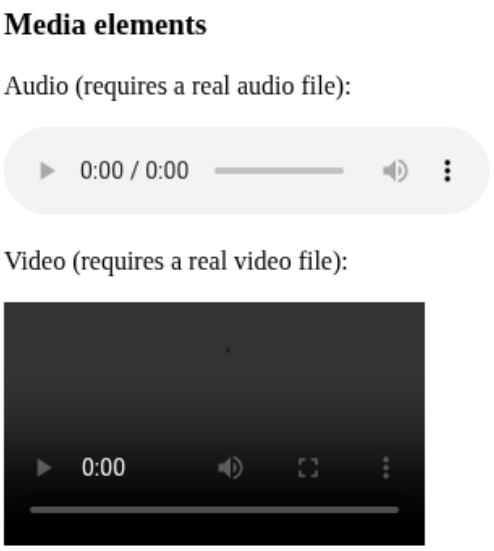

How the output works: Native audio and video controls appear; playback is unavailable until matching media files are added.

Connection to your projects: Extra practice for future media-rich pages.

Beginner tip: Only use media you own or have permission to publish.

Practice: Open `lesson-28.html`, change one value or tag, save and refresh the browser.

29 Accessible HTML and common mistakes


Why learn this? Correct markup makes projects easier to navigate and maintain.

Use label + id, descriptive alt, unique IDs, real headings, relevant button type and keyboard-friendly links.

WORKING HTML CODE

```
<main>
 <h1>Contact our team</h1>
 <form>
  <label for="message">Your message</label><br>
  <textarea id="message" name="message" rows="2" required></textarea><br>
  <button type="button">Preview only</button>
 </form>
</main>
```

ACTUAL BROWSER OUTPUT

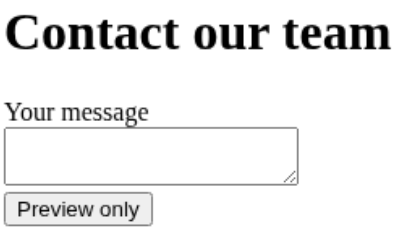

How the output works: An accessible label, textarea and button are shown. Real submission is not configured.

Connection to your projects: Especially relevant to Proform, Resume and all project navigation.

Practice: Open `lesson-29.html`, change one value or tag, save and refresh the browser.

30 Mini-project: movie landing page


Why learn this? Combine a header, navigation, movie cards and a small pricing table.

This original exercise draws on the skills practiced in CineWorld without copying the project.

WORKING HTML CODE

```
<header><h1>MovieClub</h1><p>Explore your next favorite film.</p></header>
<nav><a href="#popular">Popular</a> | <a href="#plans">Plans</a></nav>
<main>
 <section id="popular"><h2>Popular picks</h2>
  <ul><li>Starlight (Sci-Fi)</li><li>Deep Blue (Drama)</li></ul>
 </section>
 <section id="plans"><h2>Membership</h2>
  <table border="1" cellpadding="6"><tr><th>Plan</th><th>Price</th></tr>
  <tr><td>Basic</td><td>Rs 199</td></tr></table>
 </section>
</main><footer><small>Demo project only</small></footer>
```

ACTUAL BROWSER OUTPUT

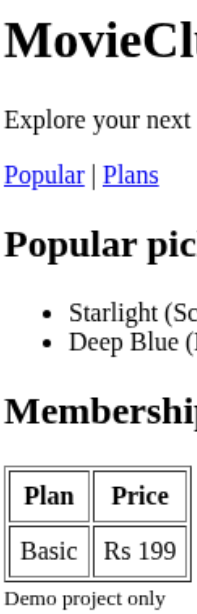

MovieClub

Explore your next favorite film.

Popular | Plans

Popular picks

- Starlight (Sci-Fi)
- Deep Blue (Drama)

Membership

Plan	Price
Basic	Rs 199

Demo project only

How the output works: A movie-site-style home page appears with navigation, content and a price table.

Connection to your projects: Inspired by CineWorld.

Practice: Open `lesson-30.html`, change one value or tag, save and refresh the browser.

31 Mini-project: result statement


Why learn this? Practice tables and summary information with a university-style document.

This original exercise is inspired by the Result project, with fictional names and sample marks.

WORKING HTML CODE

```
<header><h1>Campus Results</h1><p>Sample score statement</p></header>
<section><h2>Candidate</h2><p>Name: Student A | Semester: 2</p></section>
<table border="1" cellpadding="7">
 <tr><th>Course</th><th>Score</th><th>Status</th></tr>
 <tr><td>HTML</td><td>86</td><td>Pass</td></tr>
 <tr><td>Networks</td><td>81</td><td>Pass</td></tr>
</table>
<p><strong>Total:</strong> 167 / 200</p>
```

ACTUAL BROWSER OUTPUT

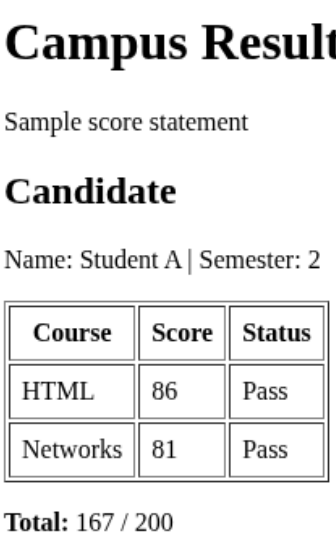

Campus Results

Sample score statement

Candidate

Name: Student A | Semester: 2

Course	Score	Status
HTML	86	Pass
Networks	81	Pass

Total: 167 / 200

How the output works: A formal result document contains candidate information, a score table and a total.

Connection to your projects: Inspired by Result.

Practice: Open `lesson-31.html`, change one value or tag, save and refresh the browser.

32 Mini-project: application portal


Why learn this? Combine multiple form input types in a structured single page.

This original exercise is inspired by the Proform project.

WORKING HTML CODE

```
<h1>CareerApply</h1>
<form onsubmit="event.preventDefault(); alert('Practice form: no backend');">
 <label for="name">Name:</label> <input id="name" required><br><br>
 <label for="mail">Email:</label> <input id="mail" type="email" required><br><br>
 <label for="track">Track:</label>
 <select id="track"><option>Web</option><option>Data</option></select><br><br>
 <label><input type="checkbox" required> I agree</label><br><br>
 <button type="submit">Apply</button>
</form>
```

ACTUAL BROWSER OUTPUT

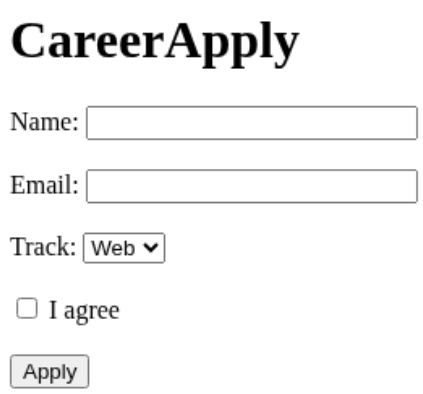

How the output works: Shows name, email, track selection, required agreement and apply button. Submission is a local demo only.

Connection to your projects: Inspired by Proform.

Practice: Open `lesson-32.html`, change one value or tag, save and refresh the browser.

Project-to-concept map

What the seven projects teach (based on their HTML files in the GitHub Projects folder):

Project	What you practice
CineWorld	Movie landing page, genres, cards, tables, links, inline styles
Proform	Registration, login, application and feedback forms
Result	Candidate information, marks tables, totals and layout
Resume	Profile image, headings, biography, projects, links
Structural	Semantic regions, articles, navigation, accessibility
TechNova	Company sections, services, team and pricing tables
TechVisionNews	Article layout, headings, emphasis and editorial text

Important: these are static HTML practice pages. Forms and visual buttons do not automatically create database accounts, upload files or stream movies. Those features need additional application logic and infrastructure.

Your next steps

• Try each lesson without looking at its code.

• Build an original page using semantic tags, tables and forms.

• Replace placeholder content and URL values with real project content.

• After HTML, practice CSS in a separate stylesheet; later add JavaScript for behavior.